


APPENDIX 2.4 ARC FLASH HAZARD LABEL STANDARD

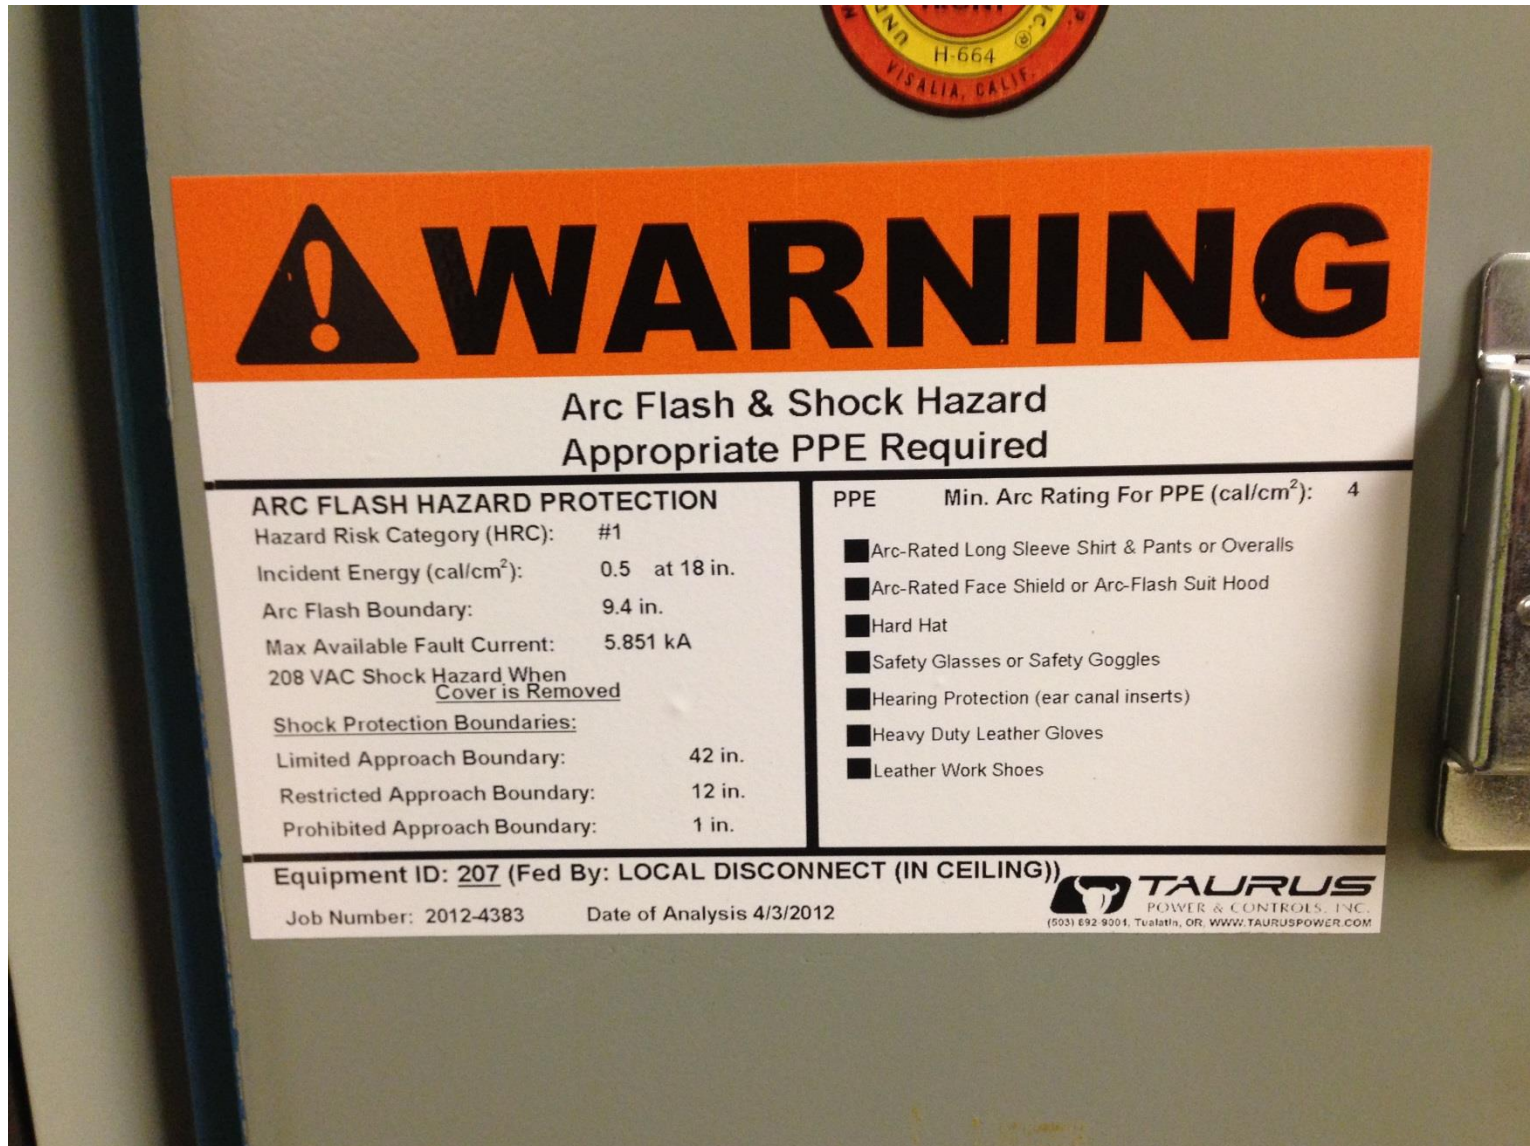


WARNING

Arc Flash & Shock Hazard
Appropriate PPE Required

ARC FLASH HAZARD PROTECTION		PPE	Min. Arc Rating For PPE (cal/cm ²):
Hazard Risk Category (HRC):	#1		4
Incident Energy (cal/cm ²):	0.5 at 18 in.	<input type="checkbox"/> Arc-Rated Long Sleeve Shirt & Pants or Overalls	
Arc Flash Boundary:	9.4 in.	<input type="checkbox"/> Arc-Rated Face Shield or Arc-Flash Suit Hood	
Max Available Fault Current:	5.851 kA	<input type="checkbox"/> Hard Hat	
208 VAC Shock Hazard When Cover is Removed		<input type="checkbox"/> Safety Glasses or Safety Goggles	
<u>Shock Protection Boundaries:</u>		<input type="checkbox"/> Hearing Protection (ear canal inserts)	
Limited Approach Boundary:	42 in.	<input type="checkbox"/> Heavy Duty Leather Gloves	
Restricted Approach Boundary:	12 in.	<input type="checkbox"/> Leather Work Shoes	
Prohibited Approach Boundary:	1 in.		

Equipment ID: 207 (Fed By: LOCAL DISCONNECT (IN CEILING))

Job Number: 2012-4383 Date of Analysis 4/3/2012

 **TAURUS**
POWER & CONTROLS, INC.
(503) 692-9004, Tualatin, OR. WWW.TAURUSPOWER.COM