


MATCH LINE TO F-1.2

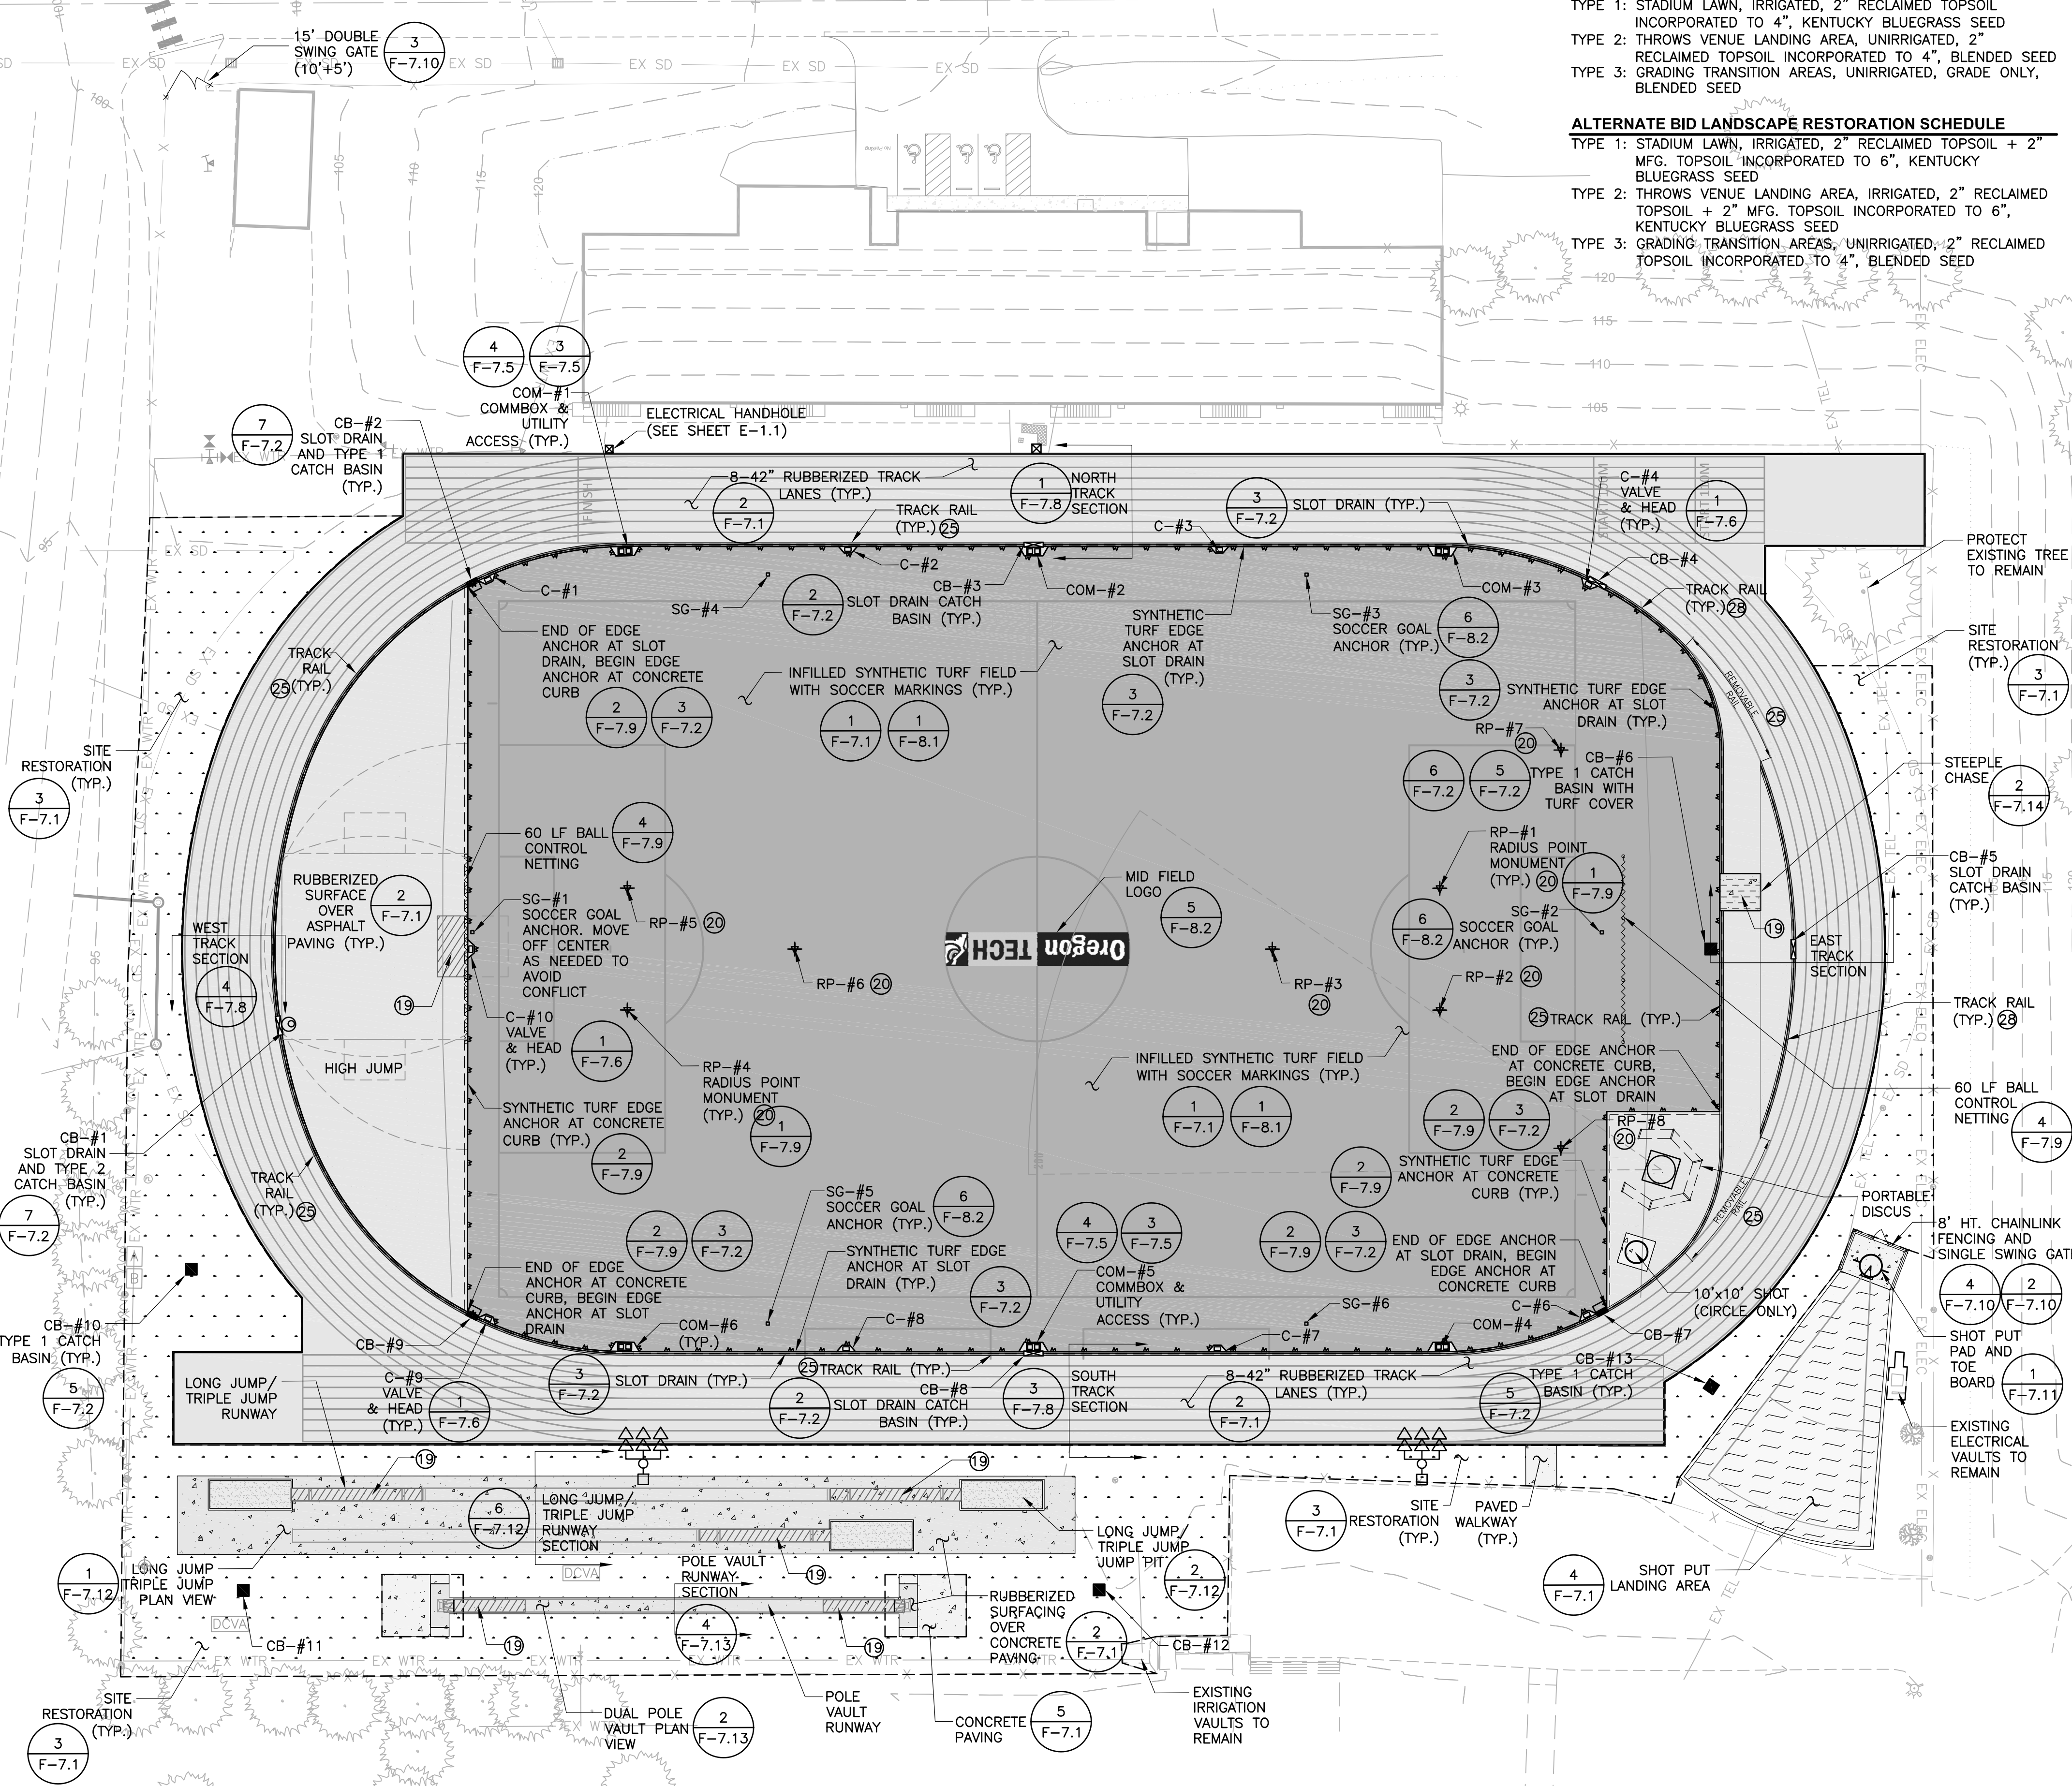

BASE BID LANDSCAPE RESTORATION SCHEDULE

- TYPE 1: STADIUM LAWN, IRRIGATED, 2" RECLAIMED TOPSOIL INCORPORATED TO 4", KENTUCKY BLUEGRASS SEED
- TYPE 2: THROWS VENUE LANDING AREA, UNIRRIGATED, 2" RECLAIMED TOPSOIL INCORPORATED TO 4", BLENDED SEED
- TYPE 3: GRADING TRANSITION AREAS, UNIRRIGATED, GRADE ONLY, BLENDED SEED

ALTERNATE BID LANDSCAPE RESTORATION SCHEDULE

- TYPE 1: STADIUM LAWN, IRRIGATED, 2" RECLAIMED TOPSOIL + 2" MFG. TOPSOIL INCORPORATED TO 6", KENTUCKY BLUEGRASS SEED
- TYPE 2: THROWS VENUE LANDING AREA, IRRIGATED, 2" RECLAIMED TOPSOIL + 2" MFG. TOPSOIL INCORPORATED TO 6", KENTUCKY BLUEGRASS SEED
- TYPE 3: GRADING TRANSITION AREAS, UNIRRIGATED, 2" RECLAIMED TOPSOIL INCORPORATED TO 4", BLENDED SEED

LAYOUT NOTES


FIELD & TRACK LAYOUT NOTES:

- LAYOUT CONTROL PLAN ON SHEET F-6.1. DIGITAL DATA PROVIDED TO THE CONTRACTOR AFTER BID AWARD UPON REQUEST. DO NOT SCALE PRINTED DRAWINGS.
- ESTABLISH THE LAYOUT OF THE TRACK RADIUS POINTS, CENTERLINE, AND MEASURING LINE, AND VERIFY 400M DISTANCE PRIOR TO COMMENCING CONSTRUCTION STAKING. SEVERAL OFFSET DIMENSIONS BASED ON THE MEASURING LINE ARE PROVIDED.
- FURNISH AND INSTALL THE TRACK SLOT DRAIN SYSTEM INCLUDING CATCH BASINS, CONNECTIONS, AND CONCRETE ENCASMENT AS SHOWN AND DESCRIBED. MEASUREMENTS TO OUTSIDE FACE AS PROVIDED. PROVIDE FOR UTILITIES ACCESS BOXES INCLUDING SPECIFIED CLEARANCES AND CONCRETE COVER. INSTALL SYNTHETIC TURF EDGE ANCHOR ON THE INSIDE FACE AS SHOWN.
- FURNISH AND INSTALL CONTINUOUS CONCRETE TRACK ASPHALT PAVEMENT CONTAINMENT CURB ALONG OUTSIDE PERIMETER, MEETING LAYOUT AND GRADING TOLERANCES. VERIFY A 3.25' MINIMUM CLEARANCE BETWEEN THE OUTSIDE EDGE OF THE OUTSIDE LANE OF THE RUBBERIZED SURFACING AND ANY VERTICAL FEATURE EXISTING OR PROPOSED INCLUDING TREES AND SHRUBS, ELECTRICAL EQUIPMENT, AND FENCING.
- INSTALL ALL IN-FIELD UTILITIES A SHOWN AND DIRECTED; STAKE LOCATIONS FOR APPROVAL PRIOR TO INSTALLATION. UTILITY PIPING AND RACEWAYS ARE SHOWN SCHEMATICALLY; INCORPORATE COMMON TRENCHING AND PLACE VALVES AND APPURTENANCES AS CLOSE AS PRACTICAL.
- PROVIDE CONCRETE CONTAINMENT CURB AND RUBBERIZED SURFACING TERMINATION SURROUNDING ALL RUBBERIZED TRACK AND FIELD EVENT SURFACING. NO RUBBERIZED SURFACING SHALL BE PLACED ON UNCONTAINED ASPHALT PAVING, AND NO RUBBERIZED SURFACING SHALL TERMINATE IN ANY WAY WHOLELY OR PARTLY ON OTHER THAN CONCRETE, OR APPROVED STEEL, ALUMINUM, OR WOOD UTILITIES ACCESS COMPONENTS.
- FURNISH AND INSTALL SYNTHETIC TURF COVERS FOR CATCH BASINS LOCATED IN THE SYNTHETIC TURF FIELD AREA NOT OTHERWISE SCHEDULED TO RECEIVE RUBBERIZED SURFACING COVER.
- FURNISH AND INSTALL RUBBERIZED SURFACING ON ALL UTILITIES INCLUDING FIELD COOLING SYSTEM COMPONENTS, ELECTRICAL AND COMMUNICATIONS HANDHOLES, WATER SYSTEMS CONTROL VALVES, AND CATCH BASINS LOCATED WITHIN OR ADJACENT TO THE RUNNING TRACK AND FIELD EVENT AREAS.
- FURNISH AND INSTALL IN-GROUND, LOCKING CABLE ANCHORS FOR PORTABLE SOCCER GOALS, TOTAL 6 (SIX) AS SHOWN OR DIRECTED.
- ALL LAYOUT (HORIZONTAL AND VERTICAL) SHALL MEET NCAA REQUIREMENTS FOR THE COMPETITION FACILITY PROPOSED. NON-COMPETITION AREAS SHALL BE LAID OUT TO +/-0.10':10'.

(CONTINUED ON SHEET F-1.2)

LAYOUT LEGEND

	SYNTHETIC TURF AND PERMEABLE AGGREGATE
	RUBBERIZED SURFACING OVER ASPHALT PAVING
	THICKENED SURFACE, 20MM, DIMENSION PER IAAF TABLE 3.1.22
	THICKENED SURFACE, WATER JUMP SURFACE, 25MM, DIMENSION PER IAAF TABLE 3.1.22 (PROVIDE STANDARD SURFACE ON COVERS)
	CINDERS
	ASPHALT PAVING
	RUBBERIZED SURFACING OVER CONCRETE PAVING
	CONCRETE PAVING
	JUMP PIT SAND
	LANDSCAPE RESTORATION TYPE 1
	CONCRETE CURBING
	LIMIT OF SYNTHETIC TURF AND EDGE ANCHOR
	SLOT DRAIN
	TYPE 1 AND SLOT DRAIN CATCH BASIN
	TYPE 2 AND SLOT DRAIN CATCH BASIN
	SLOT DRAIN CATCH BASIN
	TYPE 1 CATCH BASIN
	VALVE & HEAD IN RUBBERIZED SURFACE
	COMMBOX & UTILITY ACCESS
	BALL CONTROL NETTING

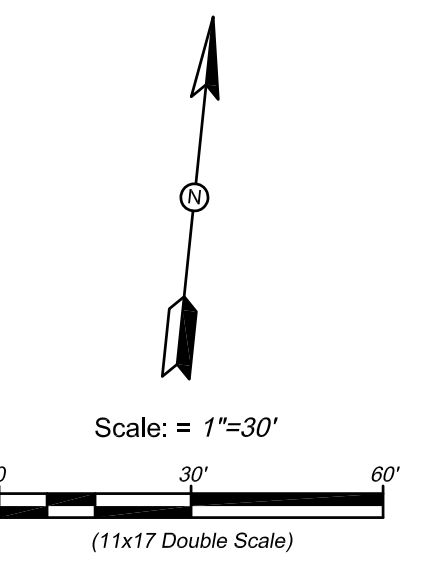


www.AuslandGroup.com
 Ashland 541.482.0923
 Eugene 541.345.1094
 Grants Pass 541.476.3788
 Medford 541.773.3387



Drawn By:	CPW, JS	Director Decision Date:	N/A
Designed By:	EUG	Final Submittal Date:	07-07-2015
Checked By:	EUG, RSH	Second Submittal Date:	01-27-2015
Approved:		City Approval Date:	
Rev 1:		By:	
Rev 2:		By:	
Rev 3:		By:	
As-Built			

OREGON TECH TRACK AND SOCCER PROJECT
 CONSTRUCTION DOCUMENTS
 MAP NO. 38-09-00, TAX LOT 4900
 3201 CAMPUS DRIVE, KLAMATH FALLS, OREGON
 CITY PROJECT NO. OIT-270-P-13-17

VERIFY SCALES
 ORIGINAL DRAWING: BAR IS ONE INCH LONG
 IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

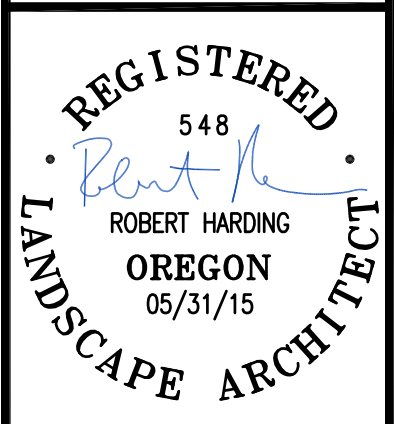

SHEET
F-1.1
 FIELD & TRACK LAYOUT PLAN

Drawing Name: K:\Files\Current Project Files\Oregon Institute of Technology\Drawings\F-01_OIT CURRENT 22-04.dwg
 Plot Date: Jun 27, 2015 10:48am