

## SECTION 01 11 00

### SUMMARY OF WORK

#### PART 1 GENERAL

##### 1.01 SUMMARY OF WORK

- A. The Work Contract consists of installation of a 12" groundwater injection well to 500' including but not limited to well bore, casing, pit-less adapter and well injection testing. Scope to also include provision and installation of a pump and pit-less adapter for the existing groundwater production well and redevelopment of the existing groundwater production well on the Oregon State University Cascades Campus, Bend, Oregon.
- B. Work shall be started no later than June 19, 2020 and only after signing of Contract on behalf of Oregon State University. The Contract may not be signed prior to approval of the Contractor's Certificate of Insurance by Construction Contract Administration (CCA), Oregon State University. Work shall be completed no later than October 31, 2020 with expected Substantial Completion to be reached no later than August 16, 2020.

##### 1.02 CONTRACTORS USE OF PREMISES

- A. Contractor shall limit use of the Premises for work and storage to allow for:
  - 1. Owner occupancy, day and night.
  - 2. Public use, day and night.
  - 3. Security.
  - 4. Safe entry and exit for vehicles and pedestrians.
  - 5. Fire egress.
- B. Coordinate all operations with the Owner's Authorized Representative during the construction period. A 96 hour notification is required prior to scheduled utility shutdowns or street closures, but more lead time is often required to schedule around other critical activities.
- C. Limit Contractor's employee parking to locations designated at the Pre-construction Conference.

##### 1.03 OWNER OCCUPANCY

- A. The Owner will occupy the Premises during the entire period of construction for the conduct of normal operations. Cooperate with Owner's Authorized Representative in construction operations to minimize conflict and to facilitate the Owner's usage especially in the following areas:
  - 1. Restricted access and parking.
  - 2. Use of stairs.
  - 3. Storage space availability.

- B. Conduct operations in such a way to ensure the least inconvenience to the general public, including:
  - 1. Limitations and easements.
  - 2. Emergency vehicle access.
  - 3. Building access to the public, day and night.

#### **1.04 ASBESTOS AND OTHER HAZARDOUS MATERIAL**

- A. The Owner has made a reasonable attempt to locate and identify asbestos or other hazardous material that may be encountered during the course of the Work.
- B. If the Contractor observes or suspects the existence of asbestos, polychlorinated biphenyl (PCB) or other hazardous materials in the structure or components of the building, the Contractor shall immediately stop work and notify the Owner's Authorized Representative.
- C. The Owner will arrange for the removal of asbestos, polychlorinated biphenyl (PCB) or other hazardous materials as required by Facilities Services personnel or by separate contract.
- D. Schedule ten (10) days of slack or "down" time for the removal of hazardous materials without penalty to Owner for the delay of the Contract.

#### **1.05 LEAD BASED PAINT**

- A. The Owner may have tested existing paint in the project area and if levels are found the following conditions apply.
- B. Contractor shall remove paint as specified for surface preparation and capture removed material for disposal.
- C. Contractor shall follow OSHA guidelines involving exposure to workers.
- D. Owner will provide containers for Contractor's use at project site.
- E. Contractor shall comply with the requirements of DEQ and EPA and shall submit a lead abatement plan.
- F. Contractor shall separate lead contaminated material from effluent and water.
- G. Owner will dispose of lead paint and effluent resulting from stripping operation.
- H. Soil contaminated by stripping operations shall be replaced with topsoil.

**END OF SECTION**

**SECTION 01 22 00**

**UNIT PRICES**

**PART 1 GENERAL**

**1.01 DESCRIPTION**

- A. Provide unit prices for the Work described herein.

**1.02 QUALITY ASSURANCE**

- A. For each unit price item which is performed, coordinate the work of the various trades involved, and modify surrounding work as required to complete the project, as intended.
- B. In the figure for each unit price, include incidental costs which, as attributable to adjustments in the work of other trades, may be required to achieve the contemplated final conditions.
- C. If there is a question regarding the extent, scope, nature, or intent of the unit price work, contact the Owner for clarification. Failure on the part of the Contractor to clarify any unclear items shall not relieve the Contractor of the responsibility for performing the Work in accordance with the intent and requirements of the Project Manual or Drawings.
- D. The description of unit price items listed hereinafter is qualitative. The quantities listed are estimated quantities and are included for the purpose of award of the Contract. Actual quantities of labor and materials required to execute the unit price items of Work will be determined by project conditions and with concurrence of the Owner's Authorized Representative.

**PART 2 PRODUCTS**

**2.01 GENERAL**

- A. The applicable Sections of the Specifications apply to the Work under each unit price item.

**PART 3 EXECUTION**

**3.01 LIST OF UNIT PRICE ITEMS OF WORK**

- A. Unit Price #1: Injection Well per foot well depth adjustment.

**END OF SECTION**

## SECTION 01 23 00

### ALTERNATES

#### PART 1 - GENERAL

##### 1.01 SECTION INCLUDES

- A. The alternates described in this Section may be exercised at the option of the Owner within 60 days of the execution of the Contract.
- B. It is generally the practice of the Owner to exercise alternates in numerical order.
- C. The Owner reserves the right to accept the alternates without regard to order or sequence; but, such acceptance shall not impair the selection of a low, responsible and responsive bidder to whom the Contract may be awarded under an equitable bid procedure.

##### 1.02 QUALITY ASSURANCE

- A. For each alternate which is accepted, coordinate the work of the various trades involved, and modify surrounding work as required to complete the project as intended.
- B. In the change-in-price figure for each alternate, include incidental costs which are attributable to adjustments in the work of other trades which may be required to achieve the contemplated and final conditions.
- C. Questions:
  - 1. If there is a question regarding the extent, scope, nature, or intent of the alternates, contact the Owner's Authorized Representative for clarification.
  - 2. Failure on the part of the Contractor to clarify any unclear items shall not relieve the Contractor of the responsibility for performing the selected alternates in accordance with the intent and requirements of the Project Manual and Drawings.
  - 3. The description of the alternates hereinafter is qualitative and not quantitative; the Contractor shall determine the quantities of labor and materials and the extent of same required to execute the selected alternates in accordance with the intent and requirements of the Project Manual and Drawings.
  - 4. The applicable Sections of the Specifications apply to the work under each alternate.

##### 1.03 LIST OF ALTERNATES

- A. Alternate 1: Provide and install temporary piping interconnecting the production and injection wells.
- B. Alternate 2: Provide temporary power for production well redevelopment and injection well testing.

- C. Alternate 3: Provide and install 75HP pump for existing ground water production well in lieu of 150HP pump as called out in Exhibit G.

**END OF SECTION**

## SECTION 01 24 76

### APPLICATIONS FOR PAYMENT

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. Work of this Section includes forms and procedures for progress payments.
- B. Related work specified elsewhere.
  - 1. For the primary discussion of payments, refer to OSU General Conditions, Section E, as supplemented.
  - 2. In compliance with OSU General Conditions, Section K, no payments beyond 75% will be made by the Owner before draft Operation and Maintenance Manuals have been received for review by the Owner.

##### 1.02 APPLICATION FORMS

- A. For applications for payment, use sample Contract Payment Request (see below), contract payment request on company letterhead, or AIA Document G702, supported by AIA Document G703, Continuation Sheet, or similar document.
- B. Prepare the Schedule of Values in such a manner that each major item of Work and each subcontracted item of Work is shown as a line item broken down in terms of material and labor costs on AIA Document G703, Application Certification of Payment, Continuation Sheet or similar format. The sample continuation sheet shall be the minimum Schedule of Values breakdown.
- C. The Schedule of Values shall be submitted for review by the Owner prior to the first application for payment; and may be used when, and only when, accepted in writing by the Owner.
- D. Payment request is to include the Contractor's Federal Tax Identification number and return address.

##### 1.03 PAYMENTS

- A. The Owner will make progress payments on account of the Contract once monthly for the scheduled duration of the project (i.e. three (3) payments on a three-month project), based on the value of work accomplished or materials on the job site, as stated in the Schedule of Values on the Application and Certificate Payment.
- B. Notwithstanding the foregoing, as this project is scheduled to take four (4) months to complete, Owner will only make four (4) payments, plus a final retainage payment, as applicable.
- C. Complete and forward Application to the Owner on or about the 15th day of each month for work performed the previous month and include certified payroll statements as specified in the OSU General Conditions.

- D. Submit one (1) copy of forms requesting payment to the Owner.
- E. Payments will be made on protected materials on hand at the job site properly stored, protected, and insured.
- F. Estimated quantities shall be subject to the Owner's review and judgment.

**1.04 EARLY PURCHASE AND PAYMENT OF MATERIALS AND EQUIPMENT**

- A. Order materials and equipment requiring a long lead or waiting time early so as not to delay progress of the Work.
- B. The Contractor will be reimbursed for early order materials or equipment upon receipt and verification of quality and quantity against submittals and shipping documents by the Owner's Authorized Representative.
- C. Receipt shall be to the job site or stored at Owner's other premises in an orderly and safe manner, secured from normal weather damage.
- D. Security remains the responsibility of the Contractor.

**END OF SECTION**

**CONTRACT PAYMENT REQUEST**

**DATE:** \_\_\_\_\_

**TO:** University Financial Services  
Oregon State University  
3015 SW Western Blvd  
Corvallis, OR 97333

Payment Request No. \_\_\_\_\_ Contract No. \_\_\_\_\_ Period from \_\_\_\_\_ to \_\_\_\_\_

Project: \_\_\_\_\_

Original Contract Amount ..... \$ \_\_\_\_\_

Change Orders (Net Amount)..... \$ \_\_\_\_\_

Contract Total to Date ..... \$ \_\_\_\_\_

=====

Total Completed and Stored to Date ..... \$ \_\_\_\_\_

Less Retainage (5%), if applicable ..... \$ \_\_\_\_\_

Total Earned, Less Retainage (if applicable) ..... \$ \_\_\_\_\_

Less Previous Payments..... \$ \_\_\_\_\_

**Net Amount Due this Request**..... \$ \_\_\_\_\_

The undersigned Contractor certifies that, to the best of his/her knowledge, information, and belief, the Work covered by this request has been completed in accordance with the Contract Documents, that all amounts have been paid for Work for which previous applications for Payment were issued and payments received from the Owner, and that the amount shown herein is now due.

Contractor: \_\_\_\_\_

By: \_\_\_\_\_ Date: \_\_\_\_\_

Federal Tax ID Number: \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_





## SECTION 01 25 00

### PRODUCT SUBSTITUTION PROCEDURES

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. General requirements for the Work in relation to substitutions and product options.
- B. Submit to the Owner's property insurance carrier shop drawings, samples, and product data (such as manufacturer's standard schematic drawings and other literature) when required by individual Specifications sections.
- C. Related Work Specified Elsewhere
  - 1. Instructions to Bidders.
  - 2. OSU General Conditions.

##### 1.02 REQUESTS FOR SUBSTITUTIONS

- A. Requests for substitution of products in place of those specified shall be in accordance with Instructions to Bidders, and as specified herein.

##### 1.03 CONTRACTOR'S RESPONSIBILITIES

- A. Investigate proposed products and determine that they are equal or superior in all respects to products specified.
- B. Provide same guarantee for accepted substitutions as for products specified.
- C. Coordinate installation of accepted substitutions into the Work, making such changes as may be required for the Work to be complete in all respects.

##### 1.04 SUBSTITUTIONS DURING BIDDING

- A. Submit two (2) copies of the following information with each request to the Owner:
  - 1. CSI substitution request form.
  - 2. Comparison of proposed substitution with product, material or system specified.
  - 3. Complete data, substantiating compliance of proposed substitution with the Contract Documents.
  - 4. Test numbers and supporting reports, indicating compliance with referenced standards.
  - 5. Evidence that warranty requirements are acceptable.
  - 6. Details indicating specific deviations proposed for the substitution.
  - 7. Reference and applicable Specification sections.
  - 8. Applicable product samples.
- B. All substitution requests shall be received in the Owner's office no less than ten (10) calendar days before bid opening. Requests received after this date will not be considered.

### **1.05 SUBSTITUTIONS DURING CONSTRUCTION**

- A. Substitutions will normally not be considered after date of Contract except when required due to unforeseen circumstances.
- B. Within a period of thirty (30) days after date of Contract, the Owner may, at its option, consider formal written requests for substitution of products in place of those specified, when submitted in accordance with the requirements stipulated herein.
- C. One or more of the following conditions must be documented in any such request:
  - 1. Required for compliance with final interpretation of code or insurance requirements.
  - 2. Required due to unavailability of a specified product.
  - 3. Required because of the inability of the specified product to perform properly or to fit in the designated space.
  - 4. Substitution would be substantially in the best interest of the Owner in terms of cost, time, or other considerations.

### **1.06 SUBSTITUTIONS NOT PERMITTED**

- A. If implied on submittals without first requesting approval thereof.
- B. If acceptance will require substantial revision of the Contract Documents.

**END OF SECTION**

SUBSTITUTION REQUEST FORM

TO: \_\_\_\_\_

PROJECT: \_\_\_\_\_

SPECIFIED ITEM:

Section	Page	Paragraph	Description
---------	------	-----------	-------------

The undersigned requests consideration of the following:

PROPOSED SUBSTITUTION: \_\_\_\_\_

Attached data includes product description, specifications, drawings, photographs, performance and test data adequate for evaluation of the request; applicable portions of the data are clearly identified.

Attached data also includes description of changes to Contract Documents which proposed substitution will require for its proper installation.

The undersigned states that the following paragraphs, unless modified on attachments, are correct:

1. The proposed substitution does not affect dimensions shown on Drawings.
2. The undersigned will pay for changes to the building design, including engineering design, detailing and construction costs caused by the requested substitution.
3. The proposed substitution will have no adverse effect on other trades, the construction schedule, or specified warranty requirements.
4. Maintenance and service parts will be locally available for the proposed substitution.

The undersigned further states that the function, appearance and quality of the Proposed Substitution are equivalent or superior to the Specified Item.

Submitted by:

Signature \_\_\_\_\_

Firm \_\_\_\_\_

Address \_\_\_\_\_

Date \_\_\_\_\_

Telephone \_\_\_\_\_

Attachments:

For use by Design Consultant:

Accepted  Accepted as noted

Not Accepted  Received too late

By \_\_\_\_\_

Date \_\_\_\_\_

Remarks \_\_\_\_\_

## SECTION 01 31 19

### PROJECT MEETINGS

#### PART 1 GENERAL

##### 1.01 PRE-CONSTRUCTION MEETING

- A. Architect/Engineer/Designer, Contractor and Owner will meet prior to start of the Work (within seven (7) days after notice to proceed) to discuss at least the following topics and any others of mutual interest.
1. Schedule of Values
  2. Permit Status/tree protection/erosion control
  3. List of sub-contractors
  4. Job inspections.
  5. Early purchase of, and/or lead time requirements for material and equipment/repurchase of equipment
  6. Monthly payment date/SOP for pay requests
  7. Portion of site to be occupied by construction.
  8. Parking/Staging areas
  9. Non-smoking campus requirements
  10. Maintenance of access and safety.
  11. Processing of field decisions and change orders
  12. Labor provisions/labor rates for subs
  13. Material submittals/deferred submittals
  14. Owner access during construction.
  15. Review of Contract Documents/review ADA requirements/cross-slopes
  16. Coordination procedures and separate contracts.
  17. Progress schedules.
  18. Critical Work sequencing.
  19. Safety and emergency procedures/24 hour contact numbers
  20. Security procedures.
  21. Hazardous materials.
  22. Progress meetings.
  23. Contract close-out.
- B. Location of Meeting: Project site

##### 1.02 PROGRESS MEETINGS

- A. The Contractor will schedule and administer progress meetings and will:
1. Prepare agendas.
  2. Schedule progress meetings, frequency, time and day to be determined during pre-construction meeting.
  3. Make physical arrangements for and preside at meetings.
  4. Record minutes and include decisions.

5. Distribute copies of minutes to participants within four (4) days after meetings.
- B. Location of Meetings: Project site.
- C. Attendance:
1. The Owner or Owner's Authorized Representative.
  2. Contractor.
  3. Subcontractors affected by agenda.
  4. Project Architect/Engineer/as necessary.
  5. Owner will attend meeting to ascertain Work is expedited consistent with progress schedule and with Contract Documents.
- D. Minimum Agenda:
1. Review and approve minutes from previous meeting.
  2. Review Work progress since previous meeting.
  3. Discuss field observations, and problems.
  4. Review delivery schedules, construction schedule, and identify problems which impede planned progress.
  5. Review proposed changes.
  6. Material submittals.
  7. Note all new subcontractors performing Work at the job site.

**END OF SECTION**

## SECTION 01 33 23

### SHOP DRAWINGS, PRODUCT DATA, SAMPLES

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. Submit to the Owner shop drawings, samples, and product data (such as manufacturer's standard schematic drawings and other literature) when required by individual Specifications sections.
- B. Related Work Specified Elsewhere
  - 1. Instructions to Bidders.
  - 2. OSU General Conditions.

##### 1.02 SUBMITTAL SCHEDULING

- A. For items requiring review by the Owner only, submittals shall be sent to the Owner at least 15 calendar days before the date each is required for fabrication or installation.
- B. Submittals to be reviewed by Owner's consultants shall be sent to the Owner at least 20 calendar days before the date each is required for fabrication or installation.
- C. Submittals to be reviewed by Owner's property insurance carrier shall be sent to Owner as directed in individual specification sections.
- D. Submittals involving Substitution requests or other modifications requiring review by the Owner and/or the Owner's consultants shall be sent to the Owner at least 20 calendar days before the date each is required for fabrication or installation.

##### 1.03 SUBMITTAL CONTENT AND FORMAT

- A. General Requirements:
  - 1. Shop Drawings: Submit in electronic format and, if requested by Owner's Authorized Representative, submit one reproducible transparency and 1 print of each drawing.
  - 2. Product Data: Submit electronically, and if requested by Owner's Authorized Representative, up to 6 hard copies.
  - 3. Samples: Submit the number and type stated in each Specification Section. Submit a minimum of three sets of color samples where color selection is required.
  - 4. Submittals shall include:
    - a. Date and revision dates return date requested.
    - b. Project title and number.
    - c. The names of the Contractor, subcontractor, supplier, and manufacturer.
    - d. Identification of product or material, with Specification Section number.
    - e. Relation to adjacent critical features of work or materials.
    - f. Field dimensions, clearly identified as such.

- g. Applicable standards, such as ASTM number or Federal Specification.
  - h. Identification of deviations from Contract Documents, and for products accompanied by Substitution request as required by Section 01 25 00.
  - i. Contractor's stamp legibly signed, essentially as follows:
    - 1) The undersigned, acting on behalf of the Contractor, certifies that this submittal has been reviewed and is approved; products have been verified as being as specified, field measurements and field construction criteria have been or will be coordinated, and the submittal is in compliance with Contract Documents.
5. Re-submission Requirements:
- a. Revise initial drawings as required and resubmit as specified for initial submittal.
  - b. Indicate on drawings any changes which have been made other than those requested by the Owner or the owner's consultants.
6. The Owner may return without review any submittal not meeting the requirements listed above.
- B. Shop Drawings:
- 1. Present data in a clear and thorough manner.
  - 2. Details shall be identified by reference to sheet and detail, schedule or room numbers shown on Contract Documents.
  - 3. Structural items shall be identified by location in the completed structure. Identify details by reference to contract sheet and detail numbers.
  - 4. Minimum sheet Size: 8 ½ x 11".
- C. Product Data:
- 1. Manufacturer's catalog sheets, brochures, diagrams, schedules, performance charts, illustrations and other standard descriptive data:
    - a. Clearly mark each copy to identify pertinent product or models.
    - b. Show dimensions, weights, and clearances required.
    - c. Show performance data consisting of capabilities, ROM, KW, pressure drops, design characteristics and consumption; conforming as closely as possible to the test methods referenced in the Plans and Specifications.
    - d. Show wiring or piping diagrams and controls.
  - 2. Manufacturer's standard schematic drawings and diagrams:
    - a. Modify to delete information which is not applicable.
    - b. Supplement standard information to provide information specifically applicable to the Work.
- D. Samples:
- 1. Insure that samples are of sufficient size to indicate the general visual effect or color.
  - 2. Where samples must show a range of color, texture, finish, graining, or other property, submit sets of pairs illustrating the full scope of this range.



3. One (1) sample or one (1) set of approved samples will be retained by the Owner; final work will be measured against approved samples.

#### **1.04 QUALITY ASSURANCE**

- A. Process submittals in ample time for review, as applicable, so as to not delay the Work. All submittals shall be received by the Owner within ten (10) days after pre-construction.

#### **1.05 DEFINITIONS**

- A. The Owner will mark reviewed materials as follows:
  1. "No Exception Taken," which means fabrication, manufacture and/or installation may proceed.
  2. "Make Revisions Noted," which means fabrication, manufacture and/or installation may proceed with revisions as noted.
  3. "Revise and Resubmit," which means that fabrication, manufacture and/or installation may not proceed.
  4. "Rejected," which means do not proceed; make arrangements for the review of the proposed Work with the Owner as soon as possible.

#### **1.06 PROCESSING**

- A. Review submittals, make necessary corrections, and become familiar with the content of the submittals.
- B. Mark each item with Contractor's stamp.
- C. Accompany submittals with a transmittal letter bearing the project name, Contractor's name, number of items, and other pertinent data.
- D. Keep one copy of each reviewed submittal on the job site at all times.
- E. Be responsible for obtaining and distributing prints of shop drawings to the various suppliers, and the Owner once review process has been completed. Make prints of reviewed shop drawings only from transparencies which carry the appropriate stamp and endorsement.

**END OF SECTION**

**SECTION 01 42 13**

**ABBREVIATIONS AND SYMBOLS**

**PART 1 GENERAL**

**1.01 REQUIREMENTS INCLUDED**

- A. Words which may be found elsewhere in the Project Manual and Drawings are abbreviated in accordance with the standards set forth in the following table:

A/C	air conditioning	CEM	cement
AB	anchor bolt	CF	cubic foot
AC	asphaltic concrete	CFOI	contractor furnished owner installed
ACT	acoustical tile	CG	corner guard
AD	area drain	CH	ceiling height
ADD	addendum	CI	cast iron
ADD'L	additional	CJ	control joint
ADH	adhesive	CKBD	chalkboard
AFF	above finish floor	CL	centerline
AGG	aggregate	CLG	ceiling
AL	aluminum	CLR	clear(ance)
ALLOW	allowable	CM	construction manager
ALT	alternate	CMT	ceramic mosaic (tile)
ANOD	anodized	CMU	concrete masonry unit
AP	access panel	COL	column
APPRX	approximate	COM	communications
ARCH	architect(ural)	CONC	concrete
ASPH	asphalt	CONN	connect(ion)
AUTO	automatic	CONST	construction
AVE	avenue	CONT	continuous or continue
BD	board	CONTR	contract(or)
BIT	bituminous	CPT	carpet
BLDG	building	CRS	course(s)
BLKG	blocking	CS	countersink
BM	bench mark, beam(s)	CSMT	casement
BOT	bottom	CT	ceramic tile
BRZ	bronze	CTR	center
BS	both side	CVG	clear vertical grain
CB	catch basin	CW	cold water
		CWT	ceramic wall tile
		CY	cubic yard

D	depth	FA	fire alarm
DEMO	demolish, demolition	FAF	fluid applied flooring
DEP	depressed	FARF	fluid applied resilient floor
DF	drinking fountain	FAS	fasten, fastener
DIA	diameter	FBD	fiberboard
DIAG	diagonal	FBT	finished blowing temperature
DIM	dimension	FD	floor drain, fire damper
DISP	dispenser	FE	fire extinguisher
DIV	division	FEC	fire extinguisher cabinet
DL	dead load	FF	factory finish
DMT	demountable	FGL	fiberglass
DN	down	FHMS	flathead machine screw
DP	dampproofing	FHWS	flathead wood screw
DR	door	FIN	finish(ed)
DS	downspout	FLCO	floor cleanout
DT	drain tile	FLR	floor(ing)
DTL	detail	FLUR	fluorescent
DW	dumbwaiter	FND	foundation
DWG	drawing(s)	FOC	face of concrete
DWR	drawer	FOIC	furnished by owner/installed by contractor
EA	each	FOIO	furnished by owner/installed by owner
EB	expansion bolt	FOM	face of masonry
EF	each face	FP	fireproofing, flash point
EJ	expansion joint	FPHB	freeze-proof hose bib
EL	elevation	FR	fire resistive, fire rated
ELEC	electric(al)	FRM	frame(d), (ing)
EMBED	embedment	FS	full size
EMER	emergency	FSS	finished structural slab
ENCL	enclose(ure)	FT	foot
EP	electrical panel board	FTG	footing
EQ	equal	FTS	finished topping slab
EQUIP	equipment	GA	gage, gauge
EST	estimate	GALV	galvanized
EVT	equiviscous temperature	GB	grab bar or gypsum board
EW	each way	GC	general contractor
EWC	electric water cooler	GI	galvanized iron
EX.EXIT	existing	GL	glass, glazing
EXH	exhaust	GLS	glass resin wall surfacing
EXP	exposed		
EXT	exterior		

GP	gypsum	LL	live load
		LONGIT	longitudinal
HB	hose bib	LP	low point
HBD	hardboard	LW	lightweight
HC	hollow core		
HD	heavy duty	MAX	maximum
HDR	header	MB	machine bolt
HDW	hardware	M. MECH	mechanic(al)
HM	hollow metal	MFR	manufacture(r)
HOR	horizontal	MH	manhole
HP	high point	Min	minimum, minute
HR	hour	MISC	miscellaneous
HT	height	MO	masonry opening
HTG	heating	MO#	model number
HVAC	heating, ventilating, air conditioning	MOD	modular
		MPH	miles per hour
HWD	hardwood	MS	machine screw
HWH	hot water heater	MTL	metal
		MULL	mullion
ID	inside diameter, identification	MWP	membrane waterproofing
IN	inch		
INCIN	incinerator	NAT	natural, natural finish
INCL	include(d), ion)	NIC	not in contract
INT	interior	NO	number
INV	invert	NOM	nominal
		NTS	not to scale
JB	junction box		
JC	janitor's closet	OA	overall
JT	joint	OBS	obscure
		OC	on center(s)
KD	kiln dried	OD	outside diameter
KCP	Keene's cement plaster	OF	overflow
KO	knockout	OFCI	owner furnished contractor installed
KP	kick plate		
		OFOI	owner furnished owner installed
LAB	laboratory	OHMS	ovalhead machine screw
		OHWS	ovalhead wood screw
LAM	lamine(d)	OPG	opening
LAV	lavatory	OPP	opposite
LBS	pounds	OZ	ounce(s)
LH	left hand	P	paint(ed)

PB	push button	SIM	similar
PCF	pounds per cubic foot	SL	sleeve
PCP	putting coat plaster	SOG	slab on grade
PERF	perforate(d)	SPEC	specification(s)
PL	plate, property line	SQ	square
PLAM	plastic laminate	SS	storm sewer
PLAS	plaster	S4S	finished 4 sides
PNL	panel	SD	storm drain
PP	push plate	ST	steel, street
PR	pair	ST ST	stainless steel
PREP	prepare	STD	standard
PSF	pounds per square foot	STR	structural
PSI	pounds per square inch	SUPP	supplement
PT	point, pressure treated	SUPT	support
PTN	partition	SUSP	suspended
PVC	polyvinyl chloride	SV	sheet vinyl
PWD	plywood		
		T	tread
QT	quarry tile	TBM	top bench mark
		T&G	tongue and groove
R	rise	TB	towel bar
RA	return air	TC	top of curb
RAD	radius	TEL	telephone
RCP	reflected ceiling plan	TEMP	tempered
RD	roof drain	THK	thickness
REF	reference	TKBD	tackboard
REFR	refrigerator	TO	top of
REINF	reinforce(ing)	TP	top of paving
REQ	required	TRANS	transverse
RET'G	retaining	TS	top of slab
REV	revision(s), revised	TV	television
RH	right hand	TW	top of wall
RM	room	TYP	typical
RO	rough opening		
RSF	resilient sheet flooring	UNO	unless noted otherwise
		VAT	vinyl asbestos tile
SC	solid core	VB	vapor barrier
SCHED	schedule	VCT	Vinyl Composition Tile
SEC	section	VERT	vertical
SF	square feet (foot)	VG	vertical grain
SHT	sheet	VIF	verify in field
SHTHG	sheathing		

VWC	vinyl wall covering	WP	waterproof(ing)
W	width, wide, water	WNS	wainscot
W/	with	WR	water resistant
W/O	without	WS	waterstop
WC	water closet	WW	window wall
WD	wood, wood finish	WWC	wood wall covering
		WWF	woven wire fabric

B. Words which may be found elsewhere in the Project Manual and Drawings are abbreviated in accordance with the standards set forth in the following table:

&	and
$\lambda$	angle
@	at
$\iota$	diameter, round
"	inches
:	is, shall b
'	feet
$\zeta$	perpendicular
/	per
%	percent
#	pound, number
X	by (as in 2 by 4)

**END OF SECTION**

## SECTION 01 42 16

### DEFINITIONS

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. Words which may be found elsewhere in the Contract Documents are defined in accordance with the standards set forth in the following table:

**Approve:**

Where used in conjunction with Architect's response to submittals, requests, applications, inquiries, reports and claims by Contractor, the meaning of term "approved" will be limited to the Architect's responsibilities and duties as specified in General and Supplementary Conditions. In no case will "approval" by Architect be interpreted as a release of Contract requirements.

**As Detailed, As Shown:**

Where "as detailed", "as shown" or words of similar importance are used, it shall be understood that reference to the Drawings accompanying the Specifications is made unless otherwise stated.

**As Directed, As Required, As Authorized, As Reviewed, As Accepted:**

Where "as directed", "as required", "as authorized", "as reviewed", "as accepted" or words of similar importance are used, it shall be understood that the direction, requirement, permission, authorization, review, or acceptance of the Architect is intended, unless otherwise stated.

**As Indicated:**

Where "as indicated" is used it shall be understood that reference to Drawings and/or Specifications is made unless otherwise stated.

**Directed, Requested, etc.:**

Terms such as "directed," "requested," "authorized," "selected," will be understood as "directed by Architect," "requested by Architect," and similar phrases shall not be interpreted to extend Architect's responsibility into Contractor's responsibility for construction supervision.

**Furnish:**

Except as otherwise defined in greater detail the term "furnish" is used to mean supply and deliver to project site, ready for unloading, unpacking, assembly, installation, etc., as applicable in each instance.

**Indicated:**

The term "indicated" is a cross-reference to graphic representations, notes or schedules on drawings, to other paragraphs or schedules in the specifications and to similar means of recording requirements in Contract Documents. Where terms such as "shown," "noted," "scheduled," and "specified" are used in lieu of "indicated," it is for purpose of helping reader locate cross-reference and no limitation of location is intended except as specifically noted.

**Install:**

Except as otherwise defined in greater detail, the term "install" is used to describe operations at project site including unloading, unpacking, assembly, erection, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning and similar operations, as applicable in each instance.

**Installer:**

The term "installer" is defined as the entity (person or firm) engaged by Contractor, or its subcontractor or sub-subcontractor for performance of a particular unit of Work at project site, including installation, erection, application and similar required operations. It is a general requirement that such entities (Installers) be expert in operations they are engaged to perform.

**Provide:**

Except as otherwise defined in greater detail, term "provide" means furnish and install, complete and ready for intended use, as applicable in each instance.

**END OF SECTION**



## SECTION 01 42 19

### REFERENCE STANDARDS

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. Quality Assurance.
- B. Location of References.
- C. Schedule of References.

##### 1.02 QUALITY ASSURANCE

- A. For products or quality of work specified by association, trade, or federal standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Conform to reference standard by date of issue current on date of Contract Documents.
- C. General Applicability of Standards: Except where Contract Documents include more stringent requirements, applicable standards of the construction industry have the same force and effect as if bound or copied directly into Contract Documents.
- D. Such standards are made a part of the Contract Documents by reference.
- E. Individual sections indicate which codes and standards the Contractor must keep at the project site, available for reference.
- F. Referenced industry standards take precedence over standards which are not referenced but recognized in industry as applicable.
- G. Non-referenced standards are not directly applicable to the Work, except as a general requirement of whether the Work complies with standards recognized in the construction industry.

##### 1.03 LOCATION OF REFERENCES

- A. Valley Library, Oregon State University.

##### 1.04 SCHEDULE OF REFERENCED ASSOCIATIONS

AIA            American Institute of Architects

	<a href="http://WWW.AIA.ORG">WWW.AIA.ORG</a>
AISC	American Institute of Steel Construction <a href="http://WWW.AISC.ORG">WWW.AISC.ORG</a>
AISI	American Iron and Steel Institute <a href="http://WWW.STEEL.ORG">WWW.STEEL.ORG</a>
ANSI	American National Standards Institute <a href="http://WWW.ANSI.ORG">WWW.ANSI.ORG</a>
APA	American Plywood Association <a href="http://WWW.APAWOOD.ORG">WWW.APAWOOD.ORG</a>
ASHRAE	American Society of Heating, Refrigerating, and Air Conditioning Engineers <a href="http://WWW.ASHRAE.ORG">WWW.ASHRAE.ORG</a>
ASTM	American Society for Testing and Materials <a href="http://WWW.ASTM.ORG">WWW.ASTM.ORG</a>
AWPA	American Wood Protection Association <a href="http://WWW.AWPA.COM">WWW.AWPA.COM</a>
AWS	American Welding Society <a href="http://WWW.AWS.ORG">WWW.AWS.ORG</a>
BIA	Masonry Institute of America <a href="http://WWW.MASONRYINSTITUTE.ORG">WWW.MASONRYINSTITUTE.ORG</a>
BOLI	Oregon Bureau of Labor and Industries <a href="http://WWW.BOLI.STATE.OR.US">WWW.BOLI.STATE.OR.US</a>
CCB	Construction Contractors Board <a href="http://WWW.OREGON.GOV.CCB/">WWW.OREGON.GOV.CCB/</a>
CDA	Copper Development Association <a href="http://WWW.COPPER.ORG">WWW.COPPER.ORG</a>
CISPI	Cast Iron Soil Pipe Institute <a href="http://WWW.CISPI.ORG">WWW.CISPI.ORG</a>
CSI	Construction Specification Institute <a href="http://WWW.CSINET.ORG">WWW.CSINET.ORG</a>
DEQ	Department of Environmental Quality (Oregon) <a href="http://WWW.OREGON.GOV/DEQ/">WWW.OREGON.GOV/DEQ/</a>

DHI	Door and Hardware Institute <a href="http://WWW.DHI.ORG">WWW.DHI.ORG</a>
DOT	Department of Transportation <a href="http://WWW.DOT.GOV">WWW.DOT.GOV</a>
EPA	U.S. Environmental Protection Agency <a href="http://WWW.EPA.GOV">WWW.EPA.GOV</a>
FM	Factory Mutual System <a href="http://WWW.FMGLOBAL.COM">WWW.FMGLOBAL.COM</a>
FS	Federal Specification General Services Administration Specifications and Consumer Information Distribution Section (WFSIS) <a href="http://WWW.GSA.GOV/PORTAL/CONTENT/103856">WWW.GSA.GOV/PORTAL/CONTENT/103856</a>
IBC	International Building Code <a href="http://WWW.ICCSAFE.ORG">WWW.ICCSAFE.ORG</a>
ICBO	International Conference of Building Officials <a href="http://PUBLICECODES.CITATION.COM/ICOD/IBG/INDEX.HTM">PUBLICECODES.CITATION.COM/ICOD/IBG/INDEX.HTM</a>
IRS	Internal Revenue Service <a href="http://WWW.IRS.GOV">WWW.IRS.GOV</a>
ISA	Instrumentation Systems and Automation Society <a href="http://WWW.ISA.ORG">WWW.ISA.ORG</a>
NAAMM	National Association of Architectural Metal Manufacturers <a href="http://WWW.NAAMM.ORG">WWW.NAAMM.ORG</a>
NBFU	National Board of Fire Underwriters <a href="http://WWW.NFPA.ORG">WWW.NFPA.ORG</a>
NEC	National Electric Code <a href="http://WWW.NECPLUS.ORG">WWW.NECPLUS.ORG</a>
NEMA	National Electrical Manufacturers' Association <a href="http://WWW.NEMA.ORG">WWW.NEMA.ORG</a>
NESC	National Electrical Safety Code <a href="http://WWW.IEEE.ORG">WWW.IEEE.ORG</a>
NFPA	National Fire Protection Association <a href="http://WWW.NFPA.ORG">WWW.NFPA.ORG</a>

NRCA	National Roofing Contractors' Association WWW.NRCA.NET
OAR	Oregon Administrative Rules ARCWEB.SOS.STATE.OR.US/404.HTML
OESP	State of Oregon Electrical Specialty Code <a href="http://www.bcd.oregon.gov/programs/online_codes.html">http://www.bcd.oregon.gov/programs/online_codes.html</a>
ORS	Oregon Revised Statutes LANDRU.LEG.STATE.OR.US/ORS/
OSHA	Occupational Safety and Health Administration WWW.OSHA.GOV
OSSC	Oregon Structural Specialty Code <a href="http://www.bcd.oregon.gov/programs/online_codes.html">http://www.bcd.oregon.gov/programs/online_codes.html</a>
PS	Product Standard STANDARDS.GOV/STANDARDS.CFM
SDI	Steel Door Institute WWW.STEELDOOR.ORG
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association WWW.SMACNA.ORG
SPRI	Single Ply Roofing Institute WWW.SPRI.ORG
SSPC	Steel Structures Painting Council WWW.SSPC.ORG
SWRI	Sealing, Waterproofing and Restoration Institute WWW.SWIRONLINE.ORG
UBC	Uniform Building Code (See ICBO)
UFC	Uniform Fire Code WWW.NFPA.ORG
UL	Underwriters' Laboratories, Inc. WWW.UL.COM
UMC	Uniform Mechanical Code WWW.UBC.COM

UPC           Uniform Plumbing Code  
                  WWW.UBC.COM

WHL           Warnock Hersey Laboratories  
                  WWW.INTEK.COM/MARKS/WH/

WCLIB         West Coast Lumber Inspection Bureau  
                  WWW.WCLIB.ORG

WWPA         Western Wood Products Association  
                  [WWW.WWPA.ORG](http://WWW.WWPA.ORG)

**END OF SECTION**

## SECTION 01 45 00

### QUALITY CONTROL

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. Codes, regulations and permits.
- B. Procedures for quality control.

##### 1.02 OWNER RESPONSIBILITIES

- A. Owner will employ and pay for services of an independent testing laboratory to perform inspection, sampling and testing as required by local building authority.
- B. Owner's Authorized Representative will provide on-site observation during construction.

##### 1.03 CODES, REGULATIONS AND PERMITS

- A. All Work shall conform with the Oregon Structural Specialty Code (OSSC) based on the International Building Code (IBC), as amended by the State of Oregon Building Codes Division and the edition designated by the governing authority.
- B. Contractor shall comply with all applicable state and local construction codes.
- C. References to codes, Specifications and standards referred to in the Contract Documents shall mean, and are intended to be, the latest edition, amendment or revision of such reference standard in effect as of the date of these Contract Documents.
- D. The Owner shall be responsible for all permits and City of Corvallis plan review fees; the Contractor shall be responsible for all licenses and associated fees required for the Project.
- E. Contractor shall arrange and attend all required permit inspections and furnish evidence of approved City inspection reports per Section 01 77 00.

##### 1.04 QUALITY OF WORK

- A. It is the true and specific intent of these Specifications that quality of Work on all phases of the construction and embracing all the trade sections shall be of high quality performed by workers skilled in their trade and performing their Work only according to the standard of best practice of the trade.
- B. All manufactured articles, materials, and equipment shall be applied, installed, connected, erected, used, cleaned and conditioned in accordance with manufacturer's directions unless otherwise specified.
- C. If Work is required in a manner to make it impossible to produce first quality Work, or should discrepancies appear among Contract Documents, request interpretation from

Architect before proceeding with Work.

- D. Failure to secure interpretation may cause rejection by Architect or owner of installation.

#### **1.05 LAYOUT**

- A. Be responsible for properly laying out the Work and for lines and measurements for the Work.
- B. Verify the figures shown on the drawings before laying out the Work and report errors or inaccuracies to the Architect before commencing Work.
- C. Strict compliance with maximum slopes is required. Accessible parking spaces and adjacent access aisles with slope exceeding 2% in any direction, as determined by OSU, shall be removed and replaced by the contractor at their expense.
- D. Strict compliance with maximum slopes is required. New sidewalks exceeding 1:20 slope or with cross slope exceeding 2%, as determined by OSU, shall be removed and replaced by the contractor at their expense. Ramps exceeding 1:16 slope or with cross slope exceeding 2%, as determined by OSU, shall be removed and replaced by the contractor at their expense.

#### **1.06 SUPERVISION**

- A. The Contractor shall maintain effective supervision on the project at all times Work is being performed.
- B. The superintendent shall be the same person throughout the project and shall attend the preconstruction conference.

#### **1.07 INSPECTIONS AND TESTING**

- A. Contractor shall notify the Owner at least twenty-four (24) hours in advance of any required progress inspection or final inspection including final punch list inspection.
- B. Cooperate with laboratory personnel, provide access to Work and furnish incidental equipment material and labor required for field testing and sample taking.

#### **1.08 EVALUATION OF TESTS AND INSPECTIONS**

- A. Results of laboratory and/or field control tests and inspections shall be the principal basis upon which satisfactory completion of Work shall be judged.
- B. If results of tests and inspections indicate Work is below requirements of Contract Documents, that portion of Work is subject to rejection.

#### **1.09 ADJUSTMENTS**

- A. Remove and replace Work so rejected at Contractor's expense including costs of subsequent tests and inspections until Work meets requirements of Contract Documents.

- B. The Owner reserves the right to perform any testing as may be required to determine compliance with the Contract Documents.
- C. Costs for such testing will be the Owner's responsibility unless testing indicates noncompliance. Cost for such testing indicating noncompliance shall be borne by the Contractor.
- D. Noncomplying Work shall be corrected and testing will be repeated until the Work complies with the Contract Documents.
- E. Contractor will pay costs for retesting noncomplying Work.

**END OF SECTION**



## SECTION 01 51 00

### CONSTRUCTION FACILITIES AND TEMPORARY CONTROLS

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. This Section specifies requirements for temporary services and facilities, including utilities, construction and support facilities, security and protection.

##### 1.02 REQUIREMENTS OF REGULATORY AGENCIES

- A. Regulations: Comply with industry standards and applicable laws and regulations of authorities having jurisdiction.
- B. Standards: Comply with NFPA Code 241, "Building Construction and Demolition Operations", ANSI-A10 Series standards for "Safety Requirements for Construction and Demolition".
- C. Electrical Service: Comply with NEMA, NEC and UL standards and regulations for temporary electric service; install service in compliance with National Electric Code (NFPA 70).
- D. Inspections: Arrange for authorities having jurisdiction to inspect and test each temporary utility before use; obtain required certifications and permits if required.

##### 1.03 PROTECTION

- A. Protect sidewalks, asphalt paving, concrete, trees, shrubs, and lawn areas at all times from damage resulting from construction activities.
- B. Prevent materials from clogging catch basins and yard drains; leave drains clean and in proper working condition.
- C. Protect Existing Irrigation Systems:
  - 1. In the event damage occurs to an underground irrigation system as a direct result of a Contractor's activities, the Contractor shall repair/replace or be assessed a charge at the discretion of the Owner.
  - 2. If repairs are to be made by the Contractor, the repairs will be inspected by the Owner's Authorized Representative prior to backfilling.
  - 3. Any galvanized pipe that requires repair shall be repaired at a threaded coupling, not by use of a compression coupling.
- D. Protect Existing Air Handling Systems:
  - 1. Contractor shall be responsible for protection of the cleanliness of the existing air handling system at all times. This protection shall include:
    - a. During site work or building demolition, prefilters shall be provided and maintained on all building outside air intakes at all times throughout the construction duration.

- b. During any interior work that may create dust in the interior space and adjacent corridor/hallways, air filters shall be provided and maintained on all affected air return and exhaust grilles. Where air flow in or out of the space is not required, all air duct openings shall be temporarily blanked off with plywood or sheet metal.
  - c. Prior to starting any work, the Contractor shall record and submit to the Owner's Authorized Representative, pressure readings across all existing air handler air filter banks before installation of new prefilters.
  - d. Upon completion of all Work affecting existing air handling systems, the Contractor shall remove all temporary filters, covers and associated parts and restore the system to its original operating condition unless otherwise stated elsewhere in the Contract Documents
- E. Clean, repair, resurface, or restore existing surfaces to their original, or better, condition, or completely replace such surfaces to match existing, where damaged by construction operations.
- F. Security is the responsibility of the Contractor.
- G. Construction Debris:
- 1. Debris shall not be allowed to remain around the buildings during performance of Work, but shall be disposed of as rapidly as it accumulates.
  - 2. On completion of Work, the buildings and grounds shall be left in a condition that is equal to or better than original condition.
  - 3. In case of failure to do so, the Owner may remove rubbish and charge the cost to the Contractor.
- H. The Contractor shall manage a safe job environment for both the safety of all the people around the Work site as well as the safety of the Owner's and general public's property.
- I. The Contractor shall provide and maintain suitable barricades, shelters, lights, and danger signals during the progress of the Work; they shall meet the requirements of the local building code and OSHA.

#### **1.04 DRAINAGE**

- A. Verify that all rain drains in the construction areas are in working order and notify the Owner's Authorized Representative in writing of any rain drains that are plugged, prior to the start of the Work.
- B. Start of Work will be considered as acknowledgment that all drains are clear and in good working order.
- C. All drains shall be left in a clean and proper working condition.

#### **1.05 CONSTRUCTION PROJECT SAFETY FORM**

- A. Contractor shall submit to the Owner, prior to signing the Contract, the completed

"Construction Project Safety Form", which is provided with instructions at the end of this Section.

#### **1.06 TEMPORARY UTILITIES**

- A. Temporary Utilities:
  - 1. Prepare a schedule indicating dates for implementation and termination of each temporary utility.
  - 2. At the earliest feasible time, when acceptable to the Owner, change over from use of temporary service to use of the permanent service.
- B. Conditions of Use:
  - 1. Keep temporary services and facilities clean and neat in appearance.
  - 2. Operate in a safe and efficient manner.
  - 3. Take necessary fire prevention measures.
  - 4. Do not overload facilities or permit them to interfere with progress.
  - 5. Do not allow hazardous, dangerous or unsanitary conditions, or public nuisances to develop or persist on the site.
- C. Electrical Service:
  - 1. Service limited to 20 amp 120V circuits will be paid for by the Owner.
  - 2. Connection to the service shall be the responsibility of the Contractor, with the Owner's approval.
  - 3. Coordinate with the Owner's Authorized Representative.
- D. Water Service:
  - 1. Service in reasonable quantities for the Project will be paid for by the Owner.
  - 2. Connection to the service shall be the responsibility of the Contractor, with the Owner's approval.
  - 3. Coordinate with the Owner's Authorized Representative.

#### **1.07 TEMPORARY SUPPORT FACILITIES**

- A. Temporary Sanitary Facilities:
  - 1. Provide and maintain an adequate number of facilities for the use of all persons employed on the Work during construction.
  - 2. Provide enclosed, weatherproof facilities with heat as required.
  - 3. Use of new or existing Owner's facilities will not be permitted.
- B. Temporary Heat and Ventilation:
  - 1. As necessary, provide temporary heat and ventilation required by construction activities, for curing or drying of completed installations or protection of installed construction from adverse effects of low temperatures or high humidity. Select safe equipment that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce the ambient condition required and minimize consumption of energy.

- C. Telephone Equipment: Provide telephone communications at project site.
- D. Existing Services:
  - 1. Do not interrupt any existing service.
  - 2. Prior request and approval of the Owner's Representative will enable the Owner to shut down any utility required by the Work.
  - 3. Contractor shall not shut down utilities.

#### **1.08 TEMPORARY BARRIERS AND ENCLOSURES**

- A. Provide barriers and fencing to prevent unauthorized entry to construction areas and to protect existing facilities and adjacent properties from damage.
- B. Provide Commercial grade chain link fence construction.
- C. Provide 6 foot high fence around construction site as directed by Owner's Authorized Representative; equip with vehicular and pedestrian gates with lock.
- D. Exterior Closures: Provide temporary secured, weather-tight closures at exterior openings, to permit acceptable working conditions and protection of the Work.
- E. Interior Closures:
  - 1. Provide temporary floor to ceiling partitions (not plastic sheeting) and ceilings as required to separate work areas from Owner occupied areas, to prevent penetration of dust and moisture into Owner occupied areas, to reduce construction noise, and to prevent damage to existing materials and equipment.
  - 2. Paint surfaces exposed to view from Owner occupied areas.

#### **1.09 ODORS**

- A. Work that causes excessive odors shall be performed only after coordination with the Owner's Authorized Representative. Filtering of air intakes to units may be required to prevent odors and vapors from entering the buildings.
- B. Contractor shall provide 7 days advance notice to the Owner's Authorized Representative in order for advance notice to be forwarded to building occupants. Work stoppage may occur if advance notification has not been coordinated or odors and vapors from the work are found to generate complaints from building occupants.

#### **1.10 FIRE SAFETY**

- A. Ensure that required exit routes remain unobstructed while building is occupied.
- B. Abide by all fire safety requirements for buildings under construction, alteration or demolition as required by Article 87, of the Uniform Fire Code as adopted by the State of Oregon.
- C. An emergency telephone shall be provided on site. Cellular telephone equipment is acceptable.
- D. Fire Suppression Equipment:

1. Install and maintain temporary fire protection facilities of the types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 10 "Standard for Portable Fire Extinguishers", and NFPA 241 "Standard for Safeguarding Construction, Alterations and Demolition Operations".
2. Maintain equipment in working condition with current inspection certificate attached to each.
3. Locate fire extinguishers where convenient and effective for their intended purpose, but not less than one extinguisher on each floor at or near each usable stairwell.
4. Store combustible materials in containers in fire-safe locations.
5. Maintain unobstructed access to fire extinguishers, fire hydrants, temporary fire protection facilities, stairways, and other access routes for fighting fires.
- 6.
6. Provide continual supervision of welding operations, combustion type temporary heating units, and similar sources of fire ignition.
7. When possible, relocate hot work to a designated hot work area.
8. If the materials or equipment cannot be relocated to a designated hot work area, use the least hazardous form of hot work that will get the job done and prepare the area properly.
9. Manage mobile hot work using the formal hot work permit system. (mentioned in the next bullet point and also a directive in the OSU Hot Work Safety Program)
10. Make sure both fire protection and hot work equipment work properly.
11. Train all personnel involved in hot work operations and activities so that they have the understanding, knowledge, and skills necessary to safely perform their jobs.

#### **1.11 CONSTRUCTION AIDS**

- A. Scaffolding: comply with applicable OSHA requirements.
- B. Material Handling Equipment:
  1. Provide necessary cranes, hoists, towers, or other lifting devices.
  2. Use only experienced operators.
  3. Remove equipment as soon as possible after task is ended.
  4. Coordinate placement of such equipment with Owner's Authorized Representative.
  5. Obtain required permits and meet requirement of governing authorities regarding applicable regulations.
- C. Materials or debris shall not be allowed to free fall from building.
- D. The use of chutes or conveyors must be approved by Owner.

#### **1.12 TEMPORARY CONTROLS**


- A. Water Control:
  1. Maintain excavations free of water.
  2. Provide, operate, and maintain necessary pumping equipment.

- B. Protection:
  - 1. Protect installed Work and provide special protection where specified in individual specification sections.
  - 2. Prohibit traffic or storage upon waterproofed or roofed surfaces.
- C. Security:
  - 1. Provide security and facilities to protect Work and existing facilities and Owner's operations from unauthorized entry, vandalism, or theft.
  - 2. Coordinate operations with Owner's Authorized Representative.
- D. Temporary Traffic Control /Pedestrian Accessibility
  - 1. A continuous route for all pedestrians, including persons with disabilities and bicyclists, shall be maintained at all times. When existing pedestrian facilities are disrupted, closed, or relocated in a construction zone, temporary pedestrian facilities shall be provided.
  - 2. Temporary pedestrian facilities should be safe and accessible. There should be no curbs or abrupt changes in grade that could cause tripping or be a barrier to wheelchair use.
  - 3. Signage shall be provided directing people to the temporary accessible route. The signage shall include the International Symbol of Accessibility.
  - 4. Contractors shall not block temporary walkways with vehicles, equipment, construction materials, signs, trash, or other objects that might prohibit pedestrian passage.
  - 5. Construction equipment and equipment operation must be separated from any open walkways. At construction zones, pedestrian fences or other protective barriers shall be provided to prevent access into the construction zone.

### **1.13 PROJECT SIGNAGE**

- A. Contractor is permitted to post only one project identification sign based on the following example:

## OSU TYPICAL JOB SIGN

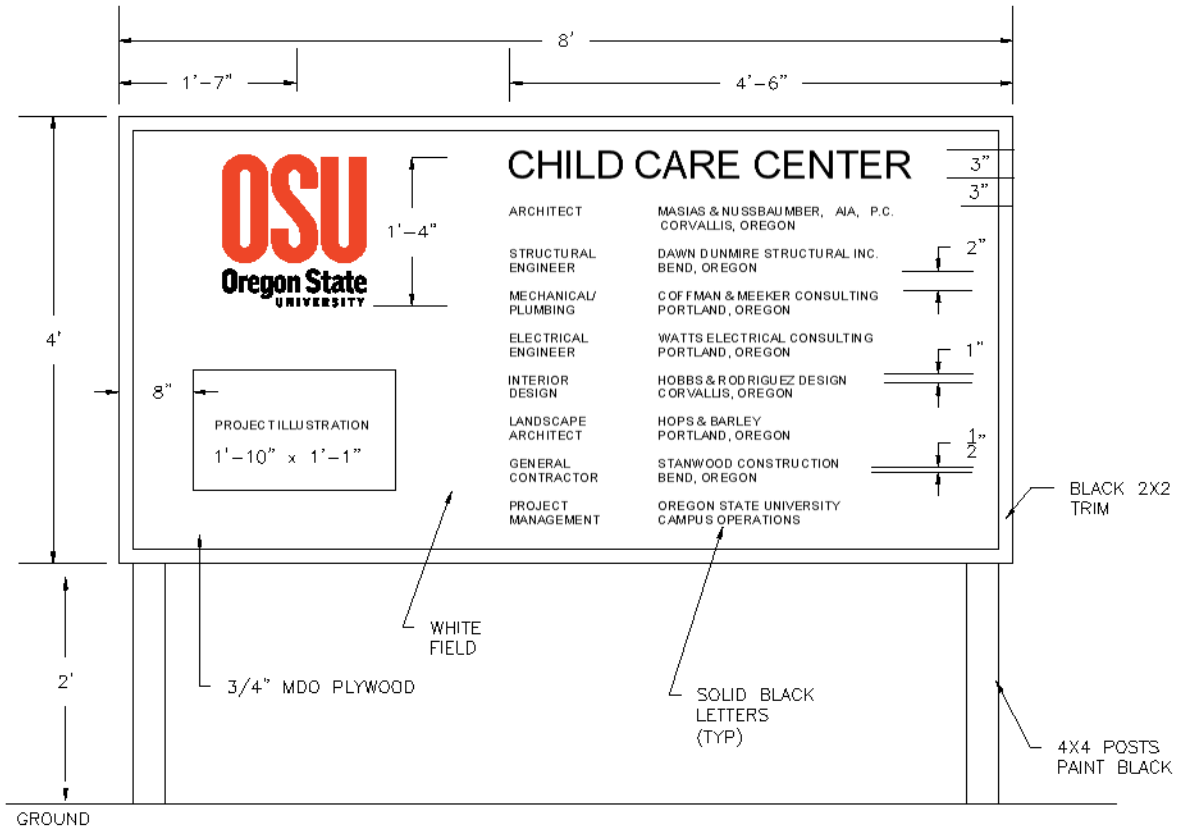

### 1.14 PREPARATION

- Consult with Owner to review jobsite areas required for field offices, material storage and stockpiles, equipment storage, access to different locations, etc.

### 1.15 PERFORMANCE

- Confine equipment, apparatus, and storage of material to work limits. The Owner will not be responsible for protection of materials and equipment from damage, pilfering, etc.
- Install temporary facilities in such a manner that the installed work will not be damaged.
- Do not use facilities of existing building unless authorized in writing by the Owner.
- Effective September 1, 2012, OSU became a non-smoking campus and smoking is prohibited on all Campus property.
- Keep facilities well maintained.
- Relocate temporary facilities as required during job progress.

- G. At Substantial Completion, clean and renovate permanent facilities that have been used during the construction period, including but not limited to:
1. Replace air filters and clean inside of ductwork and housings.
  2. Replace significantly worn parts and parts that have been subject to unusual operating conditions.
  3. Replace lamps that are burned out or noticeably dimmed by substantial hours of use.

**END OF SECTION**



# Oregon State University Construction and Maintenance Safety Requirements

EH&S, 130 Oak Creek Building, Corvallis, OR 97331-7405, (541) 737-2505,  
FAX (541) 737-9090

**Complete OSU Construction and Maintenance Safety Form** - Send completed documents (including Site Safety Plan and all separate answer pages) to Construction Contract Administration along with the signed contract and bonds.

**Project Isolation** - All construction and remodeling activities regardless of size and/or scope must be fenced, barricaded, or otherwise protected to restrict entrance and to ensure the safety of those in the general area. See isolation requirements.

**Site Safety Plan** - A site safety plan will be required and will address:

- General Information
- Emergency Information
- Key Organization Personnel
- Hazard Evaluation/Facility Impact
- Emergency Procedures
- Work Zones
- Security Measures
- Fire Protection

A model plan is attached. This form can be used if another plan has not already been prepared. Contact OSU Environmental Health & Safety for more information 737-2505.

## Isolation Requirements

**General:** All construction, maintenance, and remodeling activities, regardless of size or scope, must be fenced, barricaded, or otherwise isolated to restrict entrance and to ensure the safety of those in the general area.

**Outdoor Activities:** Outdoor projects require the following perimeter isolation:

- A six foot chain-link fence, with controlled access points, extending in all directions around the excavation or building site such that no area of the construction is accessible to pedestrians or unauthorized personnel or vehicles.
- Isolation area will include vehicle loading and unloading areas.
- At the University's option, other barricading plans may be accepted. These may apply to projects such as road resurfacing, parking lot striping, exterior building water proofing, deliveries, etc. Contact EH&S regarding other barricading plans.

**Overnight:** Any excavation across or adjacent to sidewalks or pathways which must be left open overnight, must be identified with working, blinking construction lights in addition to solid barricades

**Indoor Activities:** Indoor construction or maintenance projects which will create dust, potentially hazardous fumes or vapors, or offensive odors are subject to the following isolation:

- Areas where existing doors can provide isolation will be labeled "Construction Area--Authorized Personnel Only".

- All other areas will be isolated by a solid barrier. The minimum barrier allowed is 4 mil poly sheeting sealed to prevent migration of dust.
- Mechanical ventilation may be required.
- A solid wall is required if building envelope is opened to the outside.

**Contractor Responsibilities**

- The contractor will provide all barricading, isolation, and fencing material. OSU will not provide any materials.
- The contractor will also provide all appropriate warning and detour signs when sidewalks, exits, or roads are closed.
- Contractor will provide all other construction area signs.

**OSU Construction and Maintenance Safety Form**

**Send completed safety documents to Construction Contract Administration with contract and bonds.**

Date: \_\_\_\_\_ Project: \_\_\_\_\_

Start Date: \_\_\_\_\_ Completion date: \_\_\_\_\_

Contractor: \_\_\_\_\_ Contact: \_\_\_\_\_

Work # \_\_\_\_\_ 24 hr #: \_\_\_\_\_

OSU Project Mgr: \_\_\_\_\_ Work / 24hr #'s: \_\_\_\_\_

Dept Contact: \_\_\_\_\_ OSU EH&S Contact: \_\_\_\_\_

Preconstruction meeting? **Y N** Date/Time/Location: \_\_\_\_\_

**For the following items, prepare answers on a separate sheet for all items marked "Yes". Precede each answer with the appropriate item number. All boxes need to be checked**

Y	N	For This Project	If YES, then:
		<b>1</b> Will any confined spaces be accessed?	Describe location of entry Specify location of permit Notify EH&S prior to entry See SAF 209
		<b>2</b> Will hot work be performed (welding, cutting, brazing, etc.)?	Provide min. 5# 2A10BC extinguisher within 10 ft If indoors - provide and describe ventilation See SAF 214
		<b>3</b> Any products brought to campus?	Provide MSDS on site prior to first use; Make available to OSU on request
		<b>4</b> Will lead paint be impacted?	Describe plan to limit contamination
		<b>5</b> Will asbestos-containing-material be impacted?	Coordinate with OSU asbestos manager
		<b>6</b> Will <u>any</u> materials (construction debris, soil, water, etc) be removed from campus?	Describe in detail identity and disposition of material (how, where)
		<b>7</b> Any open trenches or holes?	Describe isolation procedures (see Page 1)
		<b>8</b> Will a crane be used?	Describe crane safety plan (include plan to prevent loads above occupied areas)
		<b>9</b> Is this project building a new facility, a major remodel?	Provide Site Safety plan Describe isolation procedures (see Page 1)
		<b>10</b> Is this a minor remodeling project?	Provide, or fill out model Site Safety Plan form ( see Page 3) Describe isolation procedures (see Page 1)
		<b>11</b> Will air contamination be produced (e.g. dust, CO, solvent vapors, VOCs, odors)?	Describe project ventilation and isolation Indicate position of building air intake(s)
		<b>12</b> Will there be noise > 85 dB?	Describe noise minimization plan
		<b>13</b> Will this project use a scaffold or an external chute?	Describe isolation, dust control, installation
		<b>14</b> Will this project involve a working surface >6' above a lower level	Describe fall protection
		<b>15</b> Will any "blind" saw-cuts or penetrations be made in existing foundations, floors, ceilings and/or walls?	Describe plan for detecting and protecting power lines or other building utility lines.

EH&S Review: \_\_\_\_\_ Date: \_\_\_\_\_

# Model Site Safety Plan

## 1. General Information

Contractor name \_\_\_\_\_  
 Address \_\_\_\_\_  
 City, State, Zip \_\_\_\_\_  
 Site Safety Officer \_\_\_\_\_ Project Dates \_\_\_\_\_  
 Project Name \_\_\_\_\_

## 2. Emergency Information

Emergency Response	911	OSU EH&S and OSU Facilities Services must be notified in the event of an emergency
Hazardous Materials Spill		
MSDS on-site location		
OSU EH&S	(541) 737-2505	
Facilities Services	(541) 737-2969	

## 3. Contractor Key Personnel

	Name	Phone	Emergency Contact
Company Owner			
Project Manager			
Job Supervisor			
Site Safety Officer			
Other Responsible Individual			
24 Hour Notification			

List of employees on site \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

4. Hazard Evaluation/ Facility Impact	
Physical	Yes / No
Heavy Equipment	
Noise	
Heat	
Elevation	
Radiation Materials	
Excavations	
Underground Utilities	
Confined Spaces	
Fire Prevention	
Electrical	

5. Emergencies
Services
Evacuation Route
First Aid Location
Hazardous Materials Spill Procedure

## 6. Work Zones

Material Storage \_\_\_\_\_  
 Parking locations \_\_\_\_\_  
 Individuals with OSU keys \_\_\_\_\_  
 Access issues \_\_\_\_\_

## 7. Security measures

\_\_\_\_\_  
 \_\_\_\_\_

## 8. Fire protection

## SECTION 01 56 39

### TREE AND PLANTING PROTECTION

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. Section includes temporary fencing, barricades, and guards to protect trees, plants and groundcovers not indicated to be removed, as necessary and required to prevent damage above and below grade.

##### 1.02 DEFINITIONS

- A. Dripline: Outer perimeter of branches of any tree or plant.
- B. Groundcover: Includes but not limited to plants and grass.

##### 1.03 PERFORMANCE REQUIREMENTS

- A. The Contractor shall exercise utmost care to protect existing trees and plants designated to remain and shall comply with all protection requirements provided by Owner and City of Corvallis as conveyed through the Owner's Authorized Representative.
- B. The Contractor shall install tree protection fencing as detailed and shall prevent damage to shrubs, groundcover, trees, root systems, soil, bark, foliage, branches and limbs due to construction activities, including but not limited to:
  - 1. Soil contamination, erosion, and compaction.
  - 2. Excessive wetting, and ponding due to storm water, and construction run-off.
  - 3. Alteration of grade, stockpiling of soil, debris, and materials.
  - 4. Damage to soil, roots, bark, trunk, limbs, branches, and foliage.
  - 5. Prevent unauthorized cutting, breaking, skinning and bruising of roots, branches, and bark.

##### 1.04 SUBMITTALS

- A. Procedural proposal for tree and plant protection, describe methods of protection, and stabilization, provide drawings and supporting documentation as directed.
- B. Contractor's Condition Inspection; include written report and color photographs.

##### 1.05 PROJECT CONDITIONS

- A. Install protection during initial mobilization at the Work site, and maintain until substantial completion.
- B. If, in the opinion of the Owner's arborist, additional protection is required, the Contractor shall install additional fencing as directed and without cost to the Owner.
- C. The location and requirements for additional fencing shall be determined by the

Owner's arborist prior to, and at any time during the course of the Work.

- D. Fencing:
  - 1. Fencing shall be installed at the tree and plant protection areas as detailed on Plans, or as directed by the Owner's Authorized Representative.
  - 2. Tree and plant protection fences shall remain in place until all Work is completed and shall not be removed or relocated without the approval of the Owner's Authorized Representative.
- E. Driving and Parking:
  - 1. Not permitted off paved surfaces without the approval of the Owner's Authorized Representative.
  - 2. When approved, the Contractor shall place plywood of sufficient thickness and width to support vehicles and prevent rutting on the area to be driven on.
  - 3. Care shall also be taken with respect to existing lawn sprinkler systems.
- F. Storage of materials and Debris: Not permitted off paved surfaces.

## **PART 2 PRODUCTS**

### **2.01 MANUFACTURED COMPONENTS**

- A. Chain Link Fencing: 11 gage galvanized chain link, six feet. tall, and 1.5 inch inside diameter galvanized steel line posts and 2.5 inch inside diameter corner posts, provide lockable gates as necessary.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verification of Conditions: Inspect trees, plants, and groundcovers, document existing conditions prior to installation of protection.

### **3.02 EXECUTION**

- A. Pruning and Cutting of Roots, Branches and Foliage:
  - 1. Review conditions with Architect or Owner prior to need for work, and proceed as directed.
  - 2. All pruning to be done by Owner's landscape maintenance personnel or ISA Certified arborist under the direction of Owner's Landscape Management Department.
  - 3. Perform pruning and cutting with sharp instruments intended for the purpose; do not break or chop.
- B. Root Cuttings:
  - 1. Carefully and cleanly cut roots and branches of trees indicated to be left standing

- where such roots and branches obstruct new construction.
2. Protect exposed roots with wet burlap until they can be covered with soil.
- C. Excavation and Trenching Within Drip Lines:
1. Permitted where indicated, and at other specifically approved locations.
  2. Tunnel under or around roots by hand digging or boring.
  3. Do not cut main lateral roots and tap roots over one inch diameter; cut smaller roots which interfere with installation of new Work.
  4. Do not allow exposed roots to dry out before permanent backfill is placed; provide temporary earth cover, or pack with peat moss and wrap with burlap.
  5. Water and maintain roots in moist condition and temporarily support and protect from damage until permanently relocated and covered with backfill.
- D. Existing Grading: Maintain within drip line of trees and plants unless otherwise indicated on the drawing and approved by the Owner's Authorized Representative.
- E. Tree Protection:
1. Provide temporary fence complying with Section 01 51 00 for protection of trees to remain.
  2. Extend fencing ten feet beyond dripline, except where greater distance is required for protection of Elm trees.
  3. Prevent entry into protected areas except as authorized in writing by the Owner's Authorized Representative.

### **3.03 REPAIR AND REPLACEMENT OF TREES AND PLANTS**

- A. Repair trees or shrubs damaged by construction operations as directed by the Owner.
- B. Make repairs promptly after damage occurs to prevent progressive deterioration of damaged trees.
- C. Damaged Trees, Shrubs and Groundcover:
1. Replace where Owner's Authorized Representative determines restoration to normal growth pattern is not possible; plant and maintain as directed.
  2. Replacement trees up to 13 inches caliper and shrubs up to 4 feet tall: Same size as damaged tree or shrub, species selected by the Owner's Authorized Representative.
  3. Trees over 13 inch caliper and shrubs greater than 4 feet tall: Compensate Owner as determined by an acceptable consulting arborist registered with the American Society of Consulting Arborists.
  4. Replacement groundcovers: Same size and quality as damaged species selected by Owner's Authorized Representative.

**END OF SECTION**

## SECTION 01 60 00

### PRODUCT REQUIREMENTS

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. Summary:
  - 1. Product options.
  - 2. Owner-furnished products.
  - 3. Product delivery, storage and handling.

##### 1.02 PRODUCTS

- A. Products:
  - 1. New material, machinery, components, equipment, fixtures, and systems forming the Work, but does not include machinery and equipment used for preparation, fabrication, conveying and erection of the Work.
  - 2. Products may also include existing materials or components specifically identified for reuse.
- B. Use interchangeable components of the same manufacture for similar components.
- C. Unless otherwise specified, all material and equipment shall be new; free from defects impairing strength, durability, and appearance; of current manufacture.
- D. Items specified shall be considered minimum as to quality, function, capacity, and suitability for application intended.
- E. Items incorporated into the Work shall conform to applicable specifications and standards designated, and shall be of size, make, type, and quality specified.
- F. Design, fabricate, and assemble in accordance with current best engineering, industry, and shop practices.
- G. Manufacture like parts of duplicate units to standard size and gauge to make them interchangeable.
- H. Two or more items of the same kind shall be identical and made by the same manufacturer.

##### 1.03 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.
- C. Products Specified by Naming One [or More] Manufacturer[s]: Products of manufacturer[s] named and meeting specifications, no options or substitutions



allowed.

D. Substitution Procedure: Under Section 01 25 00.

#### **1.04 REUSE OF EXISTING PRODUCTS**

- A. Except as specifically indicated or specified, materials and equipment removed from existing construction shall not be used in the completed Work.
- B. For material and equipment specifically indicated or specified to be reused in the Work:
  - 1. Use care in removal, handling, storage, and reinstallation to assure proper function in the completed Work.
  - 2. Arrange for transportation, storage, and handling of products which require off-site storage, restoration, or renovation.
  - 3. Remove and reinstall mechanical units, vents, guys, antennae, and electrical and grounding wires or conduits.

#### **1.05 OWNER FURNISHED PRODUCTS**

- A. Designate delivery dates of Owner-furnished items in the construction schedule.
- B. Receive, unload, store and handle Owner-furnished items at the site; protect from damage.

#### **1.06 DELIVERY, STORAGE AND HANDLING**

- A. Transport, handle, store and protect products in accordance with manufacturer's instructions.
- B. Arrange deliveries in accordance with construction schedules; coordinate to avoid conflict with Work and site conditions.
- C. Deliver and store products in undamaged condition in manufacturer's original containers or packaging with identifying labels intact and legible.
- D. Inspect shipments to assure compliance with Contract Documents and reviewed submittals, and that products are undamaged.
- E. Prevent soiling or damage to products or packaging.
- F. Interior Storage: Maintain required temperature and humidity ranges. Verify that Owner furnished storage meets product manufacturer's requirements.
- G. Exterior Storage:
  - 1. Store materials above ground to prevent soiling and/or moisture infiltration.
  - 2. Cover materials with waterproof breathable sheet coverings; provide adequate ventilation.
  - 3. All storage locations to be approved in advance by the Owner.
- H. Arrange storage to provide access for inspection.
- I. Coordinate with Owner's Authorized Representative all on-site storage activities.

J. Provide for security of stored products.

**END OF SECTION**

## SECTION 01 73 29

### CUTTING AND PATCHING

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. Requirements and limitations for cutting and patching of Work.

##### 1.02 RELATED SECTIONS

- A. Section 01 25 00, Product Substitution Procedures.
- B. Section 01 33 23, Shop Drawings, Product Data, Samples

##### 1.03 SUBMITTALS

- A. Submit written request in advance of cutting or alteration which affects:
  - 1. Structural integrity of any element of the Work.
  - 2. Efficiency, maintenance, or safety of any operational element.
  - 3. Visual qualities of sight exposed elements.
  - 4. Work of Owner or separate contractor.
- B. Include in request:
  - 1. Identification of project.
  - 2. Location and description of affected work.
  - 3. Necessity for cutting or alteration.
  - 4. Description of proposed work, and products to be used.
  - 5. Alternatives to cutting and patching.
  - 6. Effect on work of Owner or separate contractor.
  - 7. Written permission of affected separate contractor.
  - 8. Date and time work will be executed.

#### PART 2 PRODUCTS

##### 2.01 MATERIALS

- A. Primary Products: Those required for original installation.
- B. Product Substitution: For any proposed change in materials, submit request for substitution under provisions of Section 01 25 00.

#### PART 3 EXECUTION

##### 3.01 EXAMINATION

- A. Inspect existing conditions prior to commencing Work, including elements subject to

damage or movement during cutting and patching.

- B. After uncovering existing work, inspect conditions affecting performance of Work.
- C. Beginning of cutting or patching means acceptance of existing conditions.

### **3.02 PREPARATION**

- A. Provide temporary supports to ensure structural integrity of the Work.
- B. Provide devices and methods to protect other portions of the Work from damage.
- C. Provide protection from elements for areas which may be exposed by uncovering work.

### **3.03 CUTTING AND PATCHING**

- A. Execute cutting, fitting and patching to complete work.
- B. Fit products together, to integrate with other work.
- C. Remove and replace defective or non-conforming work.
- D. Provide openings in the work for penetration of mechanical and electrical work.

### **3.04 PERFORMANCE**

- A. Execute work by methods to avoid damage to other Work, and which will provide appropriate surfaces to receive patching and finishing.
- B. Cut rigid materials using masonry saw or core drill. Pneumatic tools are not allowed without prior approval from Owner's Authorized Representative.
- C. Restore work with new products in accordance with requirements of Contract Documents.
- D. At penetrations of fire rated walls, partitions, ceiling or floor construction, completely seal voids with approved fire rated material, to full thickness of the penetrated element.
- E. Refinishing:
  - 1. Refinish surfaces to match adjacent finish.
  - 2. For continuous surfaces, refinish to nearest intersection or natural break.
  - 3. For an assembly, refinish entire unit.

**END OF SECTION**

## SECTION 01 74 00

### CLEANING

#### PART 1 GENERAL

##### 1.01 SECTION INCLUDES

- A. Related requirements specified elsewhere, cleaning for specific products or work: Specification section for that work.
- B. Maintain premises and public properties free from accumulations of waste, debris, and rubbish, caused by operations.
- C. At completion of Work remove waste materials, rubbish, tools, equipment, machinery and surplus materials, and clean all sight-exposed surfaces; leave project clean and ready for occupancy.

##### 1.02 QUALITY ASSURANCE

- A. Standards: Maintain project in accord with applicable safety and insurance standards.
- B. Hazard Control:
  - 1. Store volatile wastes in covered metal containers.
  - 2. Provide adequate ventilation during use of volatile or noxious substances.

##### 1.03 MATERIALS

- A. Use only cleaning materials recommended by manufacturer of surface to be cleaned.
- B. Use cleaning materials only on surfaces recommended by cleaning material manufacturer.

##### 1.04 DURING CONSTRUCTION:

- A. Wet down dry materials and rubbish to lay dust and prevent blowing dust.
- B. At reasonable intervals during progress of Work clean site and public properties, and dispose of waste materials, debris and rubbish.
- C. Provide on-site containers for collection of waste materials, debris and rubbish.
- D. Remove waste materials, debris and rubbish from site and legally dispose of at public or private dumping areas off Owner's property.
- E. Vacuum clean interior building areas when ready to receive finish painting, and continue vacuum cleaning on an as-needed basis until project is ready for Substantial Completion or occupancy.
- F. Handle materials in a controlled manner with as few handlings as possible; do not drop or throw materials from heights.

### **1.05 FINAL CLEANING**

- A. Employ experienced workers, or professional cleaners, for final cleaning.
- B. In preparation for Substantial Completion or occupancy, conduct final inspection of sight-exposed interior and exterior surfaces, and of concealed spaces.
- C. Remove grease, dust, dirt, stains, labels, and other foreign materials from exposed interior and exterior finished surfaces.
- D. Remove putty, paint, labels, lubricants, etc., from windows, mirrors, and sash, and then polish, taking care not to scratch glass.
- E. Vacuum carpeting (shampoo where required), removing debris and excess nap.
- F. Repair, patch and touch up marred surfaces to specified finish, to match adjacent surfaces.
- G. Replace air filters where units were operated during construction.
- H. Maintain cleaning until project, or portion thereof, is occupied by Owner.

**END OF SECTION**

## SECTION 01 77 00

### CONTRACT CLOSEOUT

#### PART 1 GENERAL

##### 1.01 DESCRIPTION

- A. The requirements specified in this section relate to all Contractors individually performing under these Contract Documents:
  - 1. Project Record Documents.
  - 2. Final review and payment.
- B. Related work specified elsewhere:
  - 1. OSU General Conditions.
  - 2. Shop Drawings, Product Data and Samples, Section 01 33 23.

##### 1.02 PROJECT RECORD DOCUMENTS

- A. The Project Record Documents shall be organized to include the following information:
  - 1. Table of Contents
  - 2. Project Team List
  - 3. Specifications (Including Addenda and Change Orders)
  - 4. Injection Well Testing Reports
  - 5. Drilling Contractor Logs
  - 6. Groundwater step-injection rate test report
  - 7. Signed Warranty(ies)
  - 8. Maintenance Instructions
- B. Draft Project Record Documents shall be submitted for review upon 75% completion of the Work.
- C. Project Record Documents shall be submitted electronically to the Owner. Hard copies will not be accepted.
- D. The project team list shall include the name, address, and phone number of the Owner, Contractor, Inspector, Subcontractors, and the materials manufacturers.
- E. Legibly mark each Specification section to indicate actual as-built condition indicating changes in the Work made by addenda or change order or actual materials used and actual manufacturer(s) used.
- F. Maintain current and accurate as-built mark-ups during construction and make available to Owner's Authorized Representative upon request.
- G. Include, in a single section, all copies of the Project's labor and material warranties clearly marked to identify the Owner's responsibilities under the terms of each warranty and the section of Work that each warranty covers. One set must be clearly marked as containing original documents.

- H. Include maintenance instructions complete with technical information and name, address, and phone number of the Contractor(s) and manufacturer(s) of each material and product.

### **1.03 FINAL REVIEW AND PAYMENT**

- A. Prior to completion, the Contractor shall inspect the Work and make a Punch-list noting all items that are incomplete and/or incorrect.
- B. The Contractor shall notify all Subcontractors in writing of incomplete and/or incorrect items. Notify far enough in advance of the completion date that the Work can be completed on schedule. Said Work shall be immediately corrected.
- C. Should conditions prevail which prohibit some elements of the Work from being accomplished, but the work-in-place will perform the primary function (i.e., painting cannot be completed due to high moisture content of masonry walls.) the Contractor shall record the reason with this Punch-list item requesting temporary delay in completion from the Owner in writing.
- D. Notify the Owner in writing that all items are completed and ready for final review or else that the Work product is fully usable, but some listed deficiencies remain to be completed. Submit all record documents at this time.
- E. The Owner will review all documents. When the documents include a Contractor's request for delay in completion, the Owner will review all Work which is certified as complete to the best knowledge of the Contractor. The Owner will also review the listed incomplete Work and assign a value to such uncompleted work.
- F. The Contractor shall make the required corrections to the Work expeditiously. A letter will be addressed to the Contractor informing the Contractor of the project status.
- G. When Contract closeout procedures are completed and all Punch-list deficiencies have been corrected, provide Owner with final corrected Project Record Documents based on Owner's preliminary review. Correct Project Record Documents shall be in electronic format.
- H. Final Completion by the Owner will be documented and the Contractor will receive written notice of acceptance of the Work and notification that final payment may be billed and released.
- I. All warranties shall commence and become effective beginning on the date of Substantial Completion.

**END OF SECTION**