

**POLING HALL WINDOW REPLACEMENT
EXHIBIT G to ITB 2021-004885**



Oregon State
University

**Construction Contracts Administration
Oregon State University
644 SW 13th St.
Corvallis, Oregon 97333**

Oregon State University
Wiegand Hall
Pilot Plant
Window Replacement



Project Manual
Specifications

December 1, 2020

PERMIT SET
BID SET

waterleaf

architecture, interiors & planning

www.waterleafarch.com



project no. 2005.00

TABLE OF CONTENTS

<i>Seals Page prepared by Waterleaf Architecture, LLC</i>	Section 00 01 20
<i>Division 01 prepared by OSU, dated December 2020</i>	
Summary of Work	Section 01 11 00
Alternates	Section 01 23 00
Application for Payment	Section 01 24 76
Sample Contract Payment Request Form	
Continuation Sheet	
Product Substitution Procedures	Section 01 25 00
Sample Substitution Request Form	
Project Meetings	Section 01 31 19
Shop Drawings, Product Data, Samples	Section 01 33 23
Abbreviations and Symbols	Section 01 42 13
Definitions	Section 01 42 16
Reference Standards	Section 01 42 19
Quality Control	Section 01 45 00
Construction Facilities & Temporary Controls	Section 01 51 00
Construction and Maintenance Safety Requirements	
Construction and Maintenance Safety Form	
Construction and Maintenance Isolation Requirements	
Model Site Safety Plan	
Tree and Planting Protection	Section 01 56 39
Product Requirements	Section 01 60 00
Cutting and Patching	Section 01 73 29
Cleaning	Section 01 74 00
Contract Closeout	Section 01 77 00
<i>Divisions 02 through 1 prepared by Waterleaf Architecture, LLC</i>	
DIVISION 02 – EXISTING CONDITIONS	
Demolition	Section 02 41 00

DIVISION 05 – METALS

Metal Fabrications

Section 05 50 00

DIVISION 06 – WOOD, PLASTICS, AND COMPOSITES

Finish Carpentry

Section 06 20 00

DIVISION 07 – THERMAL AND MOISTURE PROTECTION

Weather Barriers

Section 07 25 00

Sheet Metal Flashing and Trim

Section 07 62 00

Firestopping

Section 07 84 00

Joint Sealers

Section 07 90 05

Joint Sealants

Section 07 92 00

DIVISION 08 – OPENINGS

Steel Doors and Frames

Section 08 11 13

Aluminum Framed Storefronts

Section 08 43 13

Aluminum Windows

Section 08 51 13

Door Hardware

Section 08 71 00

Glazing

Section 08 80 00

DIVISION 09 – FINISHES

Painting and Coating

Section 09 91 23

DIVISION 12 – FURNISHES

Window Shades

Section 12 24 00

SECTION 00 01 20

SEALS PAGE

I hereby certify that this project specification was prepared by me or under my direct supervision and that I am a duly registered Architect under the laws of the State of Oregon

Division 02 - Existing conditions
Division 05 - Metals
Division 06 - Wood, Plastics and Composites
Division 07 - Thermal and Moisture Protection
Division 08 - Openings
Division 09 - Finishes
Division 12 - Furnishings

William S. Bailey, AIA
Waterleaf Architecture, LLC

END OF SEALS PAGE

SECTION 01 11 00

SUMMARY OF WORK

PART 1 GENERAL

1.01 SUMMARY OF WORK

- A. The Work Contract consists of replacing approximately 156 existing single pane aluminum windows resident units throughout Poling Hall on the Oregon State University Campus, Corvallis, Oregon. Abatement and window removal will be contracted separately and managed by the Owner. Contractor shall closely coordinate with Abatement contractor.
- B. Work shall be started within ten (10) calendar days after signing of Contract on behalf of Oregon State University. The Contract may not be signed prior to approval of the Contractor's Certificate of Insurance by Construction Contract Administration (CCA), Oregon State University. Substantial Completion is expected to be no later than August 27, 2021 and Final Completion shall be no later than October 1, 2021.

1.02 CONTRACTORS USE OF PREMISES

- A. Contractor shall limit use of the Premises for work and storage to allow for:
 - 1. Owner occupancy, day and night.
 - 2. Public use, day and night.
 - 3. Security.
 - 4. Safe entry and exit for vehicles and pedestrians.
 - 5. Fire egress.
- B. Coordinate all operations with the Owner's Authorized Representative during the construction period. A 96-hour notification is required prior to scheduled utility shutdowns or street closures, but more lead time is often required to schedule around other critical activities.
- C. Limit Contractor's employee parking to locations designated at the Pre-construction Conference.

1.03 OWNER OCCUPANCY

- A. The Owner will occupy the Premises during the entire period of construction for the conduct of normal operations. Cooperate with Owner's Authorized Representative in construction operations to minimize conflict and to facilitate the Owner's usage especially in the following areas:
 - 1. Restricted access and parking.
 - 2. Use of stairs.
 - 3. Storage space availability.
- B. Conduct operations in such a way to ensure the least inconvenience to the general

public, including:

1. Limitations and easements.
2. Emergency vehicle access.
3. Building access to the public, day and night.

1.04 ASBESTOS AND OTHER HAZARDOUS MATERIAL

- A. The Owner has made a reasonable attempt to locate and identify asbestos or other hazardous material that may be encountered during the course of the Work.
- B. If the Contractor observes or suspects the existence of asbestos, polychlorinated biphenyl (PCB) or other hazardous materials in the structure or components of the building, the Contractor shall immediately stop work and notify the Owner's Authorized Representative.
- C. The Owner will arrange for the removal of asbestos, polychlorinated biphenyl (PCB) or other hazardous materials as required by Facilities Services personnel or by separate contract.
- D. Schedule ten (10) days of slack or "down" time for the removal of hazardous materials without penalty to Owner for the delay of the Contract.

1.05 LEAD BASED PAINT

- A. The Owner may have tested existing paint in the project area and if levels are found the following conditions apply.
- B. Contractor shall remove paint as specified for surface preparation and capture removed material for disposal.
- C. Contractor shall follow OSHA guidelines involving exposure to workers.
- D. Owner will provide containers for Contractor's use at project site.
- E. Contractor shall comply with the requirements of DEQ and EPA and shall submit a lead abatement plan.
- F. Contractor shall separate lead contaminated material from effluent and water.
- G. Owner will dispose of lead paint and effluent resulting from stripping operation.
- H. Soil contaminated by stripping operations shall be replaced with topsoil.

END OF SECTION

SECTION 01 23 00

ALTERNATES

PART 1 - GENERAL

1.01 SECTION INCLUDES

- A. The alternates described in this Section may be exercised at the option of the Owner within 60 days of the execution of the Contract.
- B. It is generally the practice of the Owner to exercise alternates in numerical order.
- C. The Owner reserves the right to accept the alternates without regard to order or sequence; but, such acceptance shall not impair the selection of a low, responsible and responsive bidder to whom the Contract may be awarded under an equitable bid procedure.

1.02 QUALITY ASSURANCE

- A. For each alternate which is accepted, coordinate the work of the various trades involved, and modify surrounding work as required to complete the project as intended.
- B. In the change-in-price figure for each alternate, include incidental costs which are attributable to adjustments in the work of other trades which may be required to achieve the contemplated and final conditions.
- C. Questions:
 - 1. If there is a question regarding the extent, scope, nature, or intent of the alternates, contact the Owner's Authorized Representative for clarification.
 - 2. Failure on the part of the Contractor to clarify any unclear items shall not relieve the Contractor of the responsibility for performing the selected alternates in accordance with the intent and requirements of the Project Manual and Drawings.
 - 3. The description of the alternates hereinafter is qualitative and not quantitative; the Contractor shall determine the quantities of labor and materials and the extent of same required to execute the selected alternates in accordance with the intent and requirements of the Project Manual and Drawings.
 - 4. The applicable Sections of the Specifications apply to the work under each alternate.

1.03 LIST OF ALTERNATES

- A. **Alternate 1:** Replace existing windows at corner lounges (all floors) as indicated in Exhibit G. Replace windows at the first floor north wing as indicated in Exhibit G.

- B. **Alternate 2:** Replace existing storefront window system between Cauthorn Hall and Poling Hall (all floors) as indicated in Exhibit G. Replace existing windows at the first floor north wing as indicated on Exhibit G.

END OF SECTION

SECTION 01 24 76

APPLICATIONS FOR PAYMENT

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Work of this Section includes forms and procedures for progress payments.
- B. Related work specified elsewhere.
 - 1. For the primary discussion of payments, refer to OSU General Conditions, Section E, as supplemented.
 - 2. In compliance with OSU General Conditions, Section K, no payments beyond 75% will be made by the Owner before draft Operation and Maintenance Manuals have been received for review by the Owner.

1.02 APPLICATION FORMS

- A. For applications for payment, use sample Contract Payment Request (see below), contract payment request on company letterhead, or AIA Document G702, supported by AIA Document G703, Continuation Sheet, or similar document.
- B. Prepare the Schedule of Values in such a manner that each major item of Work and each subcontracted item of Work is shown as a line item broken down in terms of material and labor costs on AIA Document G703, Application Certification of Payment, Continuation Sheet or similar format. The sample continuation sheet shall be the minimum Schedule of Values breakdown.
- C. The Schedule of Values shall be submitted for review by the Owner prior to the first application for payment; and may be used when, and only when, accepted in writing by the Owner.
- D. Payment request is to include the Contractor's Federal Tax Identification number and return address.

1.03 PAYMENTS

- A. The Owner will make progress payments on account of the Contract once monthly for the scheduled duration of the project (i.e. three (3) payments on a three-month project), based on the value of work accomplished or materials on the job site, as stated in the Schedule of Values on the Application and Certificate Payment.
- B. Complete and forward Application to the Owner on or about the 15th day of each month for work performed the previous month and include certified payroll statements as specified in the OSU General Conditions.
- C. Submit one (1) copy of forms requesting payment to the Owner.
- D. Payments will be made on protected materials on hand at the job site properly stored,

protected, and insured.

- E. Estimated quantities shall be subject to the Owner's review and judgment.

1.04 EARLY PURCHASE AND PAYMENT OF MATERIALS AND EQUIPMENT

- A. Order materials and equipment requiring a long lead or waiting time early so as not to delay progress of the Work.
- B. The Contractor will be reimbursed for early order materials or equipment upon receipt and verification of quality and quantity against submittals and shipping documents by the Owner's Authorized Representative.
- C. Receipt shall be to the job site or stored at Owner's other premises in an orderly and safe manner, secured from normal weather damage.
- D. Security remains the responsibility of the Contractor.

END OF SECTION

CONTRACT PAYMENT REQUEST

DATE: _____

TO: University Financial Services
Oregon State University
850 SW 35th St.
Corvallis, OR 97333
FacServContracts@oregonstate.edu

Payment Request No. _____ Contract No. _____ Period from _____ to _____

Project: _____

Original Contract Amount \$ _____

Change Orders (Net Amount)..... \$ _____

Contract Total to Date \$ _____

=====

Total Completed and Stored to Date \$ _____

Less Retainage (5%), if applicable \$ _____

Total Earned, Less Retainage (if applicable)..... \$ _____

Less Previous Payments..... \$ _____

Net Amount Due this Request..... \$ _____

The undersigned Contractor certifies that, to the best of his/her knowledge, information, and belief, the Work covered by this request has been completed in accordance with the Contract Documents, that all amounts have been paid for Work for which previous applications for Payment were issued and payments received from the Owner, and that the amount shown herein is now due.

Contractor: _____

By: _____ **Date:** _____

Federal Tax ID Number: _____

Address: _____

CONTINUATION SHEET

Project Name: _____

Application No.: _____

Date: _____

Period To: _____

WRN No.: _____

NOTES:

Amounts are stated to the nearest penny.

Use Column I on Contracts where variable retainage for line items may apply, or if retainage is required.

Change Orders are usually listed as the last items of the basic schedule.

A	B	C	D		E	F	G	
Item No.	Description of work	Scheduled Value	Work Completed		Materials Presently Stored (Not in D or E)	TOTAL Completed & Stored (D+E+F)	Con	Co
			From Previous Applications	This Period				
TOTALS								

SECTION 01 25 00

PRODUCT SUBSTITUTION PROCEDURES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General requirements for the Work in relation to substitutions and product options.
- B. Submit to the Owner's property insurance carrier shop drawings, samples, and product data (such as manufacturer's standard schematic drawings and other literature) when required by individual Specifications sections.
- C. Related Work Specified Elsewhere
 - 1. Invitation to Bid.
 - 2. OSU General Conditions.

1.02 REQUESTS FOR SUBSTITUTIONS

- A. Requests for substitution of products in place of those specified shall be in accordance with Invitation to Bid, and as specified herein.

1.03 CONTRACTOR'S RESPONSIBILITIES

- A. Investigate proposed products and determine that they are equal or superior in all respects to products specified.
- B. Provide same guarantee for accepted substitutions as for products specified.
- C. Coordinate installation of accepted substitutions into the Work, making such changes as may be required for the Work to be complete in all respects.

1.04 SUBSTITUTIONS DURING BIDDING

- A. Submit one electronic copy of the following information with each request to the Owner:
 - 1. Substitution request form provided below.
 - 2. Comparison of proposed substitution with product, material or system specified.
 - 3. Complete data, substantiating compliance of proposed substitution with the Contract Documents.
 - 4. Test numbers and supporting reports, indicating compliance with referenced standards.
 - 5. Evidence that warranty requirements are acceptable.
 - 6. Details indicating specific deviations proposed for the substitution.
 - 7. Reference and applicable Specification sections.
 - 8. Applicable product samples.
- B. All substitution requests shall be received in the Owner's office prior to the deadline for questions as identified in the Invitation to Bid. Requests received after this date

will not be considered.

1.05 SUBSTITUTIONS DURING CONSTRUCTION

- A. Substitutions will normally not be considered after date of Contract except when required due to unforeseen circumstances.
- B. Within a period of thirty (30) days after date of Contract, the Owner may, at its option, consider formal written requests for substitution of products in place of those specified, when submitted in accordance with the requirements stipulated herein.
- C. One or more of the following conditions must be documented in any such request:
 - 1. Required for compliance with final interpretation of code or insurance requirements.
 - 2. Required due to unavailability of a specified product.
 - 3. Required because of the inability of the specified product to perform properly or to fit in the designated space.
 - 4. Substitution would be substantially in the best interest of the Owner in terms of cost, time, or other considerations.

1.06 SUBSTITUTIONS NOT PERMITTED

- A. If implied on submittals without first requesting approval thereof.
- B. If acceptance will require substantial revision of the Contract Documents.

END OF SECTION

SUBSTITUTION REQUEST FORM

TO: _____

PROJECT: _____

SPECIFIED ITEM:

Section	Page	Paragraph	Description
---------	------	-----------	-------------

The undersigned requests consideration of the following:

PROPOSED SUBSTITUTION: _____

Attached data includes product description, specifications, drawings, photographs, performance and test data adequate for evaluation of the request; applicable portions of the data are clearly identified.

Attached data also includes description of changes to Contract Documents which proposed substitution will require for its proper installation.

The undersigned states that the following paragraphs, unless modified on attachments, are correct:

1. The proposed substitution does not affect dimensions shown on Drawings.
2. The undersigned will pay for changes to the building design, including engineering design, detailing and construction costs caused by the requested substitution.
3. The proposed substitution will have no adverse effect on other trades, the construction schedule, or specified warranty requirements.
4. Maintenance and service parts will be locally available for the proposed substitution.

The undersigned further states that the function, appearance and quality of the Proposed Substitution are equivalent or superior to the Specified Item.

Submitted by:

Signature _____

Firm _____

Address _____

Date _____

Telephone _____

For use by Design Consultant:

Accepted Accepted as noted

Not Accepted Received too late

By _____

Date _____

Remarks _____

Attachments:

SECTION 01 31 19

PROJECT MEETINGS

PART 1 GENERAL

1.01 PRE-CONSTRUCTION MEETING

- A. Architect/Engineer/Designer, Contractor and Owner will meet prior to start of the Work (within seven (7) days after notice to proceed) to discuss at least the following topics and any others of mutual interest.
1. Schedule of Values
 2. Permit Status/tree protection/erosion control
 3. List of sub-contractors
 4. Job inspections.
 5. Early purchase of, and/or lead time requirements for material and equipment/prepurchase of equipment
 6. Monthly payment date/SOP for pay requests
 7. Portion of site to be occupied by construction.
 8. Parking/Staging areas
 9. Non-smoking campus requirements
 10. Maintenance of access and safety.
 11. Processing of field decisions and change orders
 12. Labor provisions/labor rates for subs
 13. Material submittals/deferred submittals
 14. Owner access during construction.
 15. Review of Contract Documents/review ADA requirements/cross-slopes
 16. Coordination procedures and separate contracts.
 17. Progress schedules.
 18. Critical Work sequencing.
 19. Safety and emergency procedures/24 hour contact numbers
 20. Security procedures.
 21. Hazardous materials.
 22. Progress meetings.
 23. Contract close-out.
- B. Location of Meeting: Project site

1.02 PROGRESS MEETINGS

- A. The Contractor will schedule and administer progress meetings and will:
1. Prepare agendas.
 2. Schedule progress meetings, frequency, time and day to be determined during pre-construction meeting.
 3. Make physical arrangements for and preside at meetings.
 4. Record minutes and include decisions.

5. Distribute copies of minutes to participants within four (4) days after meetings.
- B. Location of Meetings: Project site.
- C. Attendance:
1. The Owner or Owner's Authorized Representative.
 2. Contractor.
 3. Subcontractors affected by agenda.
 4. Project Architect/Engineer/as necessary.
 5. Owner will attend meeting to ascertain Work is expedited consistent with progress schedule and with Contract Documents.
- D. Minimum Agenda:
1. Review and approve minutes from previous meeting.
 2. Review Work progress since previous meeting.
 3. Discuss field observations, and problems.
 4. Review delivery schedules, construction schedule, and identify problems which impede planned progress.
 5. Review proposed changes.
 6. Material submittals.
 7. Note all new subcontractors performing Work at the job site.

END OF SECTION

SECTION 01 33 23

SHOP DRAWINGS, PRODUCT DATA, SAMPLES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Submit to the Owner shop drawings, samples, and product data (such as manufacturer's standard schematic drawings and other literature) when required by individual Specifications sections.
- B. Related Work Specified Elsewhere
 - 1. OSU General Conditions.

1.02 SUBMITTAL SCHEDULING

- A. For items requiring review by the Owner only, submittals shall be sent to the Owner at least 15 calendar days before the date each is required for fabrication or installation.
- B. Submittals to be reviewed by Owner's consultants shall be sent to the Owner at least 20 calendar days before the date each is required for fabrication or installation.
- C. Submittals to be reviewed by Owner's property insurance carrier shall be sent to Owner as directed in individual specification sections.
- D. Submittals involving Substitution requests or other modifications requiring review by the Owner and/or the Owner's consultants shall be sent to the Owner at least 20 calendar days before the date each is required for fabrication or installation.

1.03 SUBMITTAL CONTENT AND FORMAT

- A. General Requirements:
 - 1. Shop Drawings: Submit in electronic format and, if requested by Owner's Authorized Representative, submit one reproducible transparency and 1 print of each drawing.
 - 2. Product Data: Submit electronically, and if requested by Owner's Authorized Representative, up to 6 hard copies.
 - 3. Samples: Submit the number and type stated in each Specification Section. Submit a minimum of three sets of color samples where color selection is required.
 - 4. Submittals shall include:
 - a. Date and revision dates return date requested.
 - b. Project title and number.
 - c. The names of the Contractor, subcontractor, supplier, and manufacturer.
 - d. Identification of product or material, with Specification Section number.
 - e. Relation to adjacent critical features of work or materials.
 - f. Field dimensions, clearly identified as such.
 - g. Applicable standards, such as ASTM number or Federal Specification.

- h. Identification of deviations from Contract Documents, and for products accompanied by Substitution request as required by Section 01 25 00.
 - i. Contractor's stamp legibly signed, essentially as follows:
 - 1) The undersigned, acting on behalf of the Contractor, certifies that this submittal has been reviewed and is approved; products have been verified as being as specified, field measurements and field construction criteria have been or will be coordinated, and the submittal is in compliance with Contract Documents.
5. Re-submission Requirements:
- a. Revise initial drawings as required and resubmit as specified for initial submittal.
 - b. Indicate on drawings any changes which have been made other than those requested by the Owner or the owner's consultants.
6. The Owner may return without review any submittal not meeting the requirements listed above.
- B. Shop Drawings:
- 1. Present data in a clear and thorough manner.
 - 2. Details shall be identified by reference to sheet and detail, schedule or room numbers shown on Contract Documents.
 - 3. Structural items shall be identified by location in the completed structure. Identify details by reference to contract sheet and detail numbers.
 - 4. Minimum sheet Size: 8 ½ x 11".
- C. Product Data:
- 1. Manufacturer's catalog sheets, brochures, diagrams, schedules, performance charts, illustrations and other standard descriptive data:
 - a. Clearly mark each copy to identify pertinent product or models.
 - b. Show dimensions, weights, and clearances required.
 - c. Show performance data consisting of capabilities, ROM, KW, pressure drops, design characteristics and consumption; conforming as closely as possible to the test methods referenced in the Plans and Specifications.
 - d. Show wiring or piping diagrams and controls.
 - 2. Manufacturer's standard schematic drawings and diagrams:
 - a. Modify to delete information which is not applicable.
 - b. Supplement standard information to provide information specifically applicable to the Work.
- D. Samples:
- 1. Insure that samples are of sufficient size to indicate the general visual effect or color.
 - 2. Where samples must show a range of color, texture, finish, graining, or other property, submit sets of pairs illustrating the full scope of this range.
 - 3. One (1) sample or one (1) set of approved samples will be retained by the Owner;

final work will be measured against approved samples.

1.04 QUALITY ASSURANCE

- A. Process submittals in ample time for review, as applicable, so as to not delay the Work. All submittals shall be received by the Owner within ten (10) days after pre-construction.

1.05 DEFINITIONS

- A. The Owner will mark reviewed materials as follows:
 - 1. "No Exception Taken," which means fabrication, manufacture and/or installation may proceed.
 - 2. "Make Revisions Noted," which means fabrication, manufacture and/or installation may proceed with revisions as noted.
 - 3. "Revise and Resubmit," which means that fabrication, manufacture and/or installation may not proceed.
 - 4. "Rejected," which means do not proceed; make arrangements for the review of the proposed Work with the Owner as soon as possible.

1.06 PROCESSING

- A. Review submittals, make necessary corrections, and become familiar with the content of the submittals.
- B. Mark each item with Contractor's stamp.
- C. Accompany submittals with a transmittal letter bearing the project name, Contractor's name, number of items, and other pertinent data.
- D. Keep one copy of each reviewed submittal on the job site at all times.
- E. Be responsible for obtaining and distributing prints of shop drawings to the various suppliers, and the Owner once review process has been completed. Make prints of reviewed shop drawings only from transparencies which carry the appropriate stamp and endorsement.

END OF SECTION

SECTION 01 42 13

ABBREVIATIONS AND SYMBOLS

PART 1 GENERAL

1.01 REQUIREMENTS INCLUDED

- A. Words which may be found elsewhere in the Project Manual and Drawings are abbreviated in accordance with the standards set forth in the following table:

A/C	air conditioning	CEM	cement
AB	anchor bolt	CF	cubic foot
AC	asphaltic concrete	CFOI	contractor furnished owner installed
ACT	acoustical tile	CG	corner guard
AD	area drain	CH	ceiling height
ADD	addendum	CI	cast iron
ADD'L	additional	CJ	control joint
ADH	adhesive	CKBD	chalkboard
AFF	above finish floor	CL	centerline
AGG	aggregate	CLG	ceiling
AL	aluminum	CLR	clear(ance)
ALLOW	allowable	CM	construction manager
ALT	alternate	CMT	ceramic mosaic (tile)
ANOD	anodized	CMU	concrete masonry unit
AP	access panel	COL	column
APPRX	approximate	COM	communications
ARCH	architect(ural)	CONC	concrete
ASPH	asphalt	CONN	connect(ion)
AUTO	automatic	CONST	construction
AVE	avenue	CONT	continuous or continue
BD	board	CONTR	contract(or)
BIT	bituminous	CPT	carpet
BLDG	building	CRS	course(s)
BLKG	blocking	CS	countersink
BM	bench mark, beam(s)	CSMT	casement
BOT	bottom	CT	ceramic tile
BRZ	bronze	CTR	center
BS	both side	CVG	clear vertical grain
CB	catch basin	CW	cold water
		CWT	ceramic wall tile
		CY	cubic yard

D	depth	FA	fire alarm
DEMO	demolish, demolition	FAF	fluid applied flooring
DEP	depressed	FARF	fluid applied resilient floor
DF	drinking fountain	FAS	fasten, fastener
DIA	diameter	FBD	fiberboard
DIAG	diagonal	FBT	finished blowing temperature
DIM	dimension	FD	floor drain, fire damper
DISP	dispenser	FE	fire extinguisher
DIV	division	FEC	fire extinguisher cabinet
DL	dead load	FF	factory finish
DMT	demountable	FGL	fiberglass
DN	down	FHMS	flathead machine screw
DP	dampproofing	FHWS	flathead wood screw
DR	door	FIN	finish(ed)
DS	downspout	FLCO	floor cleanout
DT	drain tile	FLR	floor(ing)
DTL	detail	FLUR	fluorescent
DW	dumbwaiter	FND	foundation
DWG	drawing(s)	FOC	face of concrete
DWR	drawer	FOIC	furnished by owner/installed by contractor
EA	each	FOIO	furnished by owner/installed by owner
EB	expansion bolt	FOM	face of masonry
EF	each face	FP	fireproofing, flash point
EJ	expansion joint	FPHB	freeze-proof hose bib
EL	elevation	FR	fire resistive, fire rated
ELEC	electric(al)	FRM	frame(d), (ing)
EMBED	embedment	FS	full size
EMER	emergency	FSS	finished structural slab
ENCL	enclose(ure)	FT	foot
EP	electrical panel board	FTG	footing
EQ	equal	FTS	finished topping slab
EQUIP	equipment	GA	gage, gauge
EST	estimate	GALV	galvanized
EVT	equiviscous temperature	GB	grab bar or gypsum board
EW	each way	GC	general contractor
EWC	electric water cooler	GI	galvanized iron
EX.EXIT	existing	GL	glass, glazing
EXH	exhaust	GLS	glass resin wall surfacing
EXP	exposed		
EXT	exterior		

GP	gypsum	LL	live load
HB	hose bib	LONGIT	longitudinal
HBD	hardboard	LP	low point
HC	hollow core	LW	lightweight
HD	heavy duty	MAX	maximum
HDR	header	MB	machine bolt
HDW	hardware	M. MECH	mechanic(al)
HM	hollow metal	MFR	manufacture(r)
HOR	horizontal	MH	manhole
HP	high point	Min	minimum, minute
HR	hour	MISC	miscellaneous
HT	height	MO	masonry opening
HTG	heating	MO#	model number
HVAC	heating, ventilating, air conditioning	MOD	modular
HWD	hardwood	MPH	miles per hour
HWH	hot water heater	MS	machine screw
ID	inside diameter, identification	MTL	metal
IN	inch	MULL	mullion
INCIN	incinerator	MWP	membrane waterproofing
INCL	include(d), ion)	NAT	natural, natural finish
INT	interior	NIC	not in contract
INV	invert	NO	number
JB	junction box	NOM	nominal
JC	janitor's closet	NTS	not to scale
JT	joint	OA	overall
KD	kiln dried	OBS	obscure
KCP	Keene's cement plaster	OC	on center(s)
KO	knockout	OD	outside diameter
KP	kick plate	OF	overflow
LAB	laboratory	OFCI	owner furnished contractor installed
LAM	lamine(d)	OFOI	owner furnished owner installed
LAV	lavatory	OHMS	ovalhead machine screw
LBS	pounds	OHWS	ovalhead wood screw
LH	left hand	OPG	opening
		OPP	opposite
		OZ	ounce(s)
		P	paint(ed)

PB	push button	SIM	similar
PCF	pounds per cubic foot	SL	sleeve
PCP	putting coat plaster	SOG	slab on grade
PERF	perforate(d)	SPEC	specification(s)
PL	plate, property line	SQ	square
PLAM	plastic laminate	SS	storm sewer
PLAS	plaster	S4S	finished 4 sides
PNL	panel	SD	storm drain
PP	push plate	ST	steel, street
PR	pair	ST ST	stainless steel
PREP	prepare	STD	standard
PSF	pounds per square foot	STR	structural
PSI	pounds per square inch	SUPP	supplement
PT	point, pressure treated	SUPT	support
PTN	partition	SUSP	suspended
PVC	polyvinyl chloride	SV	sheet vinyl
PWD	plywood		
		T	tread
QT	quarry tile	TBM	top bench mark
		T&G	tongue and groove
R	rise	TB	towel bar
RA	return air	TC	top of curb
RAD	radius	TEL	telephone
RCP	reflected ceiling plan	TEMP	tempered
RD	roof drain	THK	thickness
REF	reference	TKBD	tackboard
REFR	refrigerator	TO	top of
REINF	reinforce(ing)	TP	top of paving
REQ	required	TRANS	transverse
RET'G	retaining	TS	top of slab
REV	revision(s), revised	TV	television
RH	right had	TW	top of wall
RM	room	TYP	typical
RO	rough opening		
RSF	resilient sheet flooring	UNO	unless noted otherwise
		VAT	vinyl asbestos tile
SC	solid core	VB	vapor barrier
SCHED	schedule	VCT	Vinyl Composition Tile
SEC	section	VERT	vertical
SF	square feet (foot)	VG	vertical grain
SHT	sheet	VIF	verify in field
SHTHG	sheathing		

VWC	vinyl wall covering	WP	waterproof(ing)
W	width, wide, water	WNS	wainscot
W/	with	WR	water resistant
W/O	without	WS	waterstop
WC	water closet	WW	window wall
WD	wood, wood finish	WWC	wood wall covering
		WWF	woven wire fabric

B. Words which may be found elsewhere in the Project Manual and Drawings are abbreviated in accordance with the standards set forth in the following table:

&	and
λ	angle
@	at
ι	diameter, round
"	inches
:	is, shall b
'	feet
ζ	perpendicular
/	per
%	percent
#	pound, number
X	by (as in 2 by 4)

END OF SECTION

SECTION 01 42 16

DEFINITIONS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Words which may be found elsewhere in the Contract Documents are defined in accordance with the standards set forth in the following table:

Approve:

Where used in conjunction with Architect's response to submittals, requests, applications, inquiries, reports and claims by Contractor, the meaning of term "approved" will be limited to the Architect's responsibilities and duties as specified in General and Supplementary Conditions. In no case will "approval" by Architect be interpreted as a release of Contract requirements.

As Detailed, As Shown:

Where "as detailed", "as shown" or words of similar importance are used, it shall be understood that reference to the Drawings accompanying the Specifications is made unless otherwise stated.

As Directed, As Required, As Authorized, As Reviewed, As Accepted:

Where "as directed", "as required", "as authorized", "as reviewed", "as accepted" or words of similar importance are used, it shall be understood that the direction, requirement, permission, authorization, review, or acceptance of the Architect is intended, unless otherwise stated.

As Indicated:

Where "as indicated" is used it shall be understood that reference to Drawings and/or Specifications is made unless otherwise stated.

Directed, Requested, etc.:

Terms such as "directed," "requested," "authorized," "selected," will be understood as "directed by Architect," "requested by Architect," and similar phrases shall not be interpreted to extend Architect's responsibility into Contractor's responsibility for construction supervision.

Furnish:

Except as otherwise defined in greater detail the term "furnish" is used to mean supply and deliver to project site, ready for unloading, unpacking, assembly, installation, etc., as applicable in each instance.

Indicated:

The term "indicated" is a cross-reference to graphic representations, notes or schedules on drawings, to other paragraphs or schedules in the specifications and to similar means of recording requirements in Contract Documents. Where terms such as "shown," "noted," "scheduled," and "specified" are used in lieu of "indicated," it is for purpose of helping reader locate cross-reference and no limitation of location is intended except as specifically noted.

Install:

Except as otherwise defined in greater detail, the term "install" is used to describe operations at project site including unloading, unpacking, assembly, erection, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning and similar operations, as applicable in each instance.

Installer:

The term "installer" is defined as the entity (person or firm) engaged by Contractor, or its subcontractor or sub-subcontractor for performance of a particular unit of Work at project site, including installation, erection, application and similar required operations. It is a general requirement that such entities (Installers) be expert in operations they are engaged to perform.

Provide:

Except as otherwise defined in greater detail, term "provide" means furnish and install, complete and ready for intended use, as applicable in each instance.

END OF SECTION

SECTION 01 42 19

REFERENCE STANDARDS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Quality Assurance.
- B. Location of References.
- C. Schedule of References.

1.02 QUALITY ASSURANCE

- A. For products or quality of work specified by association, trade, or federal standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Conform to reference standard by date of issue current on date of Contract Documents.
- C. General Applicability of Standards: Except where Contract Documents include more stringent requirements, applicable standards of the construction industry have the same force and effect as if bound or copied directly into Contract Documents.
- D. Such standards are made a part of the Contract Documents by reference.
- E. Individual sections indicate which codes and standards the Contractor must keep at the project site, available for reference.
- F. Referenced industry standards take precedence over standards which are not referenced but recognized in industry as applicable.
- G. Non-referenced standards are not directly applicable to the Work, except as a general requirement of whether the Work complies with standards recognized in the construction industry.

1.03 LOCATION OF REFERENCES

- A. Valley Library, Oregon State University.

1.04 SCHEDULE OF REFERENCED ASSOCIATIONS

AIA	American Institute of Architects WWW.AIA.ORG
AISC	American Institute of Steel Construction WWW.AISC.ORG
AISI	American Iron and Steel Institute WWW.STEEL.ORG
ANSI	American National Standards Institute WWW.ANSI.ORG
APA	American Plywood Association WWW.APAWOOD.ORG
ASHRAE	American Society of Heating, Refrigerating, and Air Conditioning Engineers WWW.ASHRAE.ORG
ASTM	American Society for Testing and Materials WWW.ASTM.ORG
AWPA	American Wood Protection Association WWW.AWPA.COM
AWS	American Welding Society WWW.AWS.ORG
BIA	Masonry Institute of America WWW.MASONRYINSTITUTE.ORG
BOLI	Oregon Bureau of Labor and Industries WWW.BOLI.STATE.OR.US
CCB	Construction Contractors Board WWW.OREGON.GOV.CCB/
CDA	Copper Development Association WWW.COPPER.ORG
CISPI	Cast Iron Soil Pipe Institute WWW.CISPI.ORG
CSI	Construction Specification Institute WWW.CSINET.ORG

DEQ	Department of Environmental Quality (Oregon) WWW.OREGON.GOV/DEQ/
DHI	Door and Hardware Institute WWW.DHI.ORG
DOT	Department of Transportation WWW.DOT.GOV
EPA	U.S. Environmental Protection Agency WWW.EPA.GOV
FM	Factory Mutual System WWW.FMGLOBAL.COM
FS	Federal Specification General Services Administration Specifications and Consumer Information Distribution Section (WFSIS) WWW.GSA.GOV/PORTAL/CONTENT/103856
IBC	International Building Code WWW.ICCSAFE.ORG
ICBO	International Conference of Building Officials PUBLICCODES.CITATION.COM/ICOD/IBG/INDEX.HTM
IRS	Internal Revenue Service WWW.IRS.GOV
ISA	Instrumentation Systems and Automation Society WWW.ISA.ORG
NAAMM	National Association of Architectural Metal Manufacturers WWW.NAAMM.ORG
NBFU	National Board of Fire Underwriters WWW.NFPA.ORG
NEC	National Electric Code WWW.NECPLUS.ORG
NEMA	National Electrical Manufacturers' Association WWW.NEMA.ORG
NESC	National Electrical Safety Code WWW.IEEE.ORG

NFPA	National Fire Protection Association WWW.NFPA.ORG
NRCA	National Roofing Contractors' Association WWW.NRCA.NET
OAR	Oregon Administrative Rules ARCWEB.SOS.STATE.OR.US/404.HTML
OESP	State of Oregon Electrical Specialty Code http://www.bcd.oregon.gov/programs/online_codes.html
ORS	Oregon Revised Statutes LANDRU.LEG.STATE.OR.US/ORS/
OSHA	Occupational Safety and Health Administration WWW.OSHA.GOV
OSSC	Oregon Structural Specialty Code http://www.bcd.oregon.gov/programs/online_codes.html
PS	Product Standard STANDARDS.GOV/STANDARDS.CFM
SDI	Steel Door Institute WWW.STEELDOOR.ORG
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association WWW.SMACNA.ORG
SPRI	Single Ply Roofing Institute WWW.SPRI.ORG
SSPC	Steel Structures Painting Council WWW.SSPC.ORG
SWRI	Sealing, Waterproofing and Restoration Institute WWW.SWIRONLINE.ORG
UBC	Uniform Building Code (See ICBO)
UFC	Uniform Fire Code WWW.NFPA.ORG
UL	Underwriters' Laboratories, Inc. WWW.UL.COM

UMC	Uniform Mechanical Code WWW.UBC.COM
UPC	Uniform Plumbing Code WWW.UBC.COM
WHL	Warnock Hersey Laboratories WWW.INTEK.COM/MARKS/WH/
WCLIB	West Coast Lumber Inspection Bureau WWW.WCLIB.ORG
WWPA	Western Wood Products Association WWW.WWPA.ORG

END OF SECTION

SECTION 01 45 00

QUALITY CONTROL

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Codes, regulations and permits.
- B. Procedures for quality control.

1.02 OWNER RESPONSIBILITIES

- A. Owner will employ and pay for services of an independent testing laboratory to perform inspection, sampling and testing as required by local building authority.
- B. Owner's Authorized Representative will provide on-site observation during construction.

1.03 CODES, REGULATIONS AND PERMITS

- A. All Work shall conform with the Oregon Structural Specialty Code (OSSC) based on the International Building Code (IBC), as amended by the State of Oregon Building Codes Division and the edition designated by the governing authority.
- B. Contractor shall comply with all applicable state and local construction codes.
- C. References to codes, Specifications and standards referred to in the Contract Documents shall mean, and are intended to be, the latest edition, amendment or revision of such reference standard in effect as of the date of these Contract Documents.
- D. The Owner shall be responsible for all permits and City of Corvallis plan review fees; the Contractor shall be responsible for all licenses and associated fees required for the Project.
- E. Contractor shall arrange and attend all required permit inspections and furnish evidence of approved City inspection reports per Section 01 77 00.

1.04 QUALITY OF WORK

- A. It is the true and specific intent of these Specifications that quality of Work on all phases of the construction and embracing all the trade sections shall be of high quality performed by workers skilled in their trade and performing their Work only according to the standard of best practice of the trade.
- B. All manufactured articles, materials, and equipment shall be applied, installed, connected, erected, used, cleaned and conditioned in accordance with manufacturer's directions unless otherwise specified.
- C. If Work is required in a manner to make it impossible to produce first quality Work, or should discrepancies appear among Contract Documents, request interpretation from

Architect before proceeding with Work.

- D. Failure to secure interpretation may cause rejection by Architect or owner of installation.

1.05 LAYOUT

- A. Be responsible for properly laying out the Work and for lines and measurements for the Work.
- B. Verify the figures shown on the drawings before laying out the Work and report errors or inaccuracies to the Architect before commencing Work.
- C. Strict compliance with maximum slopes is required. Accessible parking spaces and adjacent access aisles with slope exceeding 2% in any direction, as determined by OSU, shall be removed and replaced by the contractor at their expense.
- D. Strict compliance with maximum slopes is required. New sidewalks exceeding 1:20 slope or with cross slope exceeding 2%, as determined by OSU, shall be removed and replaced by the contractor at their expense. Ramps exceeding 1:16 slope or with cross slope exceeding 2%, as determined by OSU, shall be removed and replaced by the contractor at their expense.

1.06 SUPERVISION

- A. The Contractor shall maintain effective supervision on the project at all times Work is being performed.
- B. The superintendent shall be the same person throughout the project and shall attend the preconstruction conference.

1.07 INSPECTIONS AND TESTING

- A. Contractor shall notify the Owner at least twenty-four (24) hours in advance of any required progress inspection or final inspection including final punch list inspection.
- B. Cooperate with laboratory personnel, provide access to Work and furnish incidental equipment material and labor required for field testing and sample taking.

1.08 EVALUATION OF TESTS AND INSPECTIONS

- A. Results of laboratory and/or field control tests and inspections shall be the principal basis upon which satisfactory completion of Work shall be judged.
- B. If results of tests and inspections indicate Work is below requirements of Contract Documents, that portion of Work is subject to rejection.

1.09 ADJUSTMENTS

- A. Remove and replace Work so rejected at Contractor's expense including costs of subsequent tests and inspections until Work meets requirements of Contract Documents.

- B. The Owner reserves the right to perform any testing as may be required to determine compliance with the Contract Documents.
- C. Costs for such testing will be the Owner's responsibility unless testing indicates noncompliance. Cost for such testing indicating noncompliance shall be borne by the Contractor.
- D. Noncomplying Work shall be corrected and testing will be repeated until the Work complies with the Contract Documents.
- E. Contractor will pay costs for retesting noncomplying Work.

END OF SECTION

SECTION 01 51 00

CONSTRUCTION FACILITIES AND TEMPORARY CONTROLS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. This Section specifies requirements for temporary services and facilities, including utilities, construction and support facilities, security and protection.

1.02 REQUIREMENTS OF REGULATORY AGENCIES

- A. Regulations: Comply with industry standards and applicable laws and regulations of authorities having jurisdiction.
- B. Standards: Comply with NFPA Code 241, "Building Construction and Demolition Operations", ANSI-A10 Series standards for "Safety Requirements for Construction and Demolition".
- C. Electrical Service: Comply with NEMA, NEC and UL standards and regulations for temporary electric service; install service in compliance with National Electric Code (NFPA 70).
- D. Inspections: Arrange for authorities having jurisdiction to inspect and test each temporary utility before use; obtain required certifications and permits if required.

1.03 PROTECTION

- A. Protect sidewalks, asphalt paving, concrete, trees, shrubs, and lawn areas at all times from damage resulting from construction activities.
- B. Prevent materials from clogging catch basins and yard drains; leave drains clean and in proper working condition.
- C. Protect Existing Irrigation Systems:
 - 1. In the event damage occurs to an underground irrigation system as a direct result of a Contractor's activities, the Contractor shall repair/replace or be assessed a charge at the discretion of the Owner.
 - 2. If repairs are to be made by the Contractor, the repairs will be inspected by the Owner's Authorized Representative prior to backfilling.
 - 3. Any galvanized pipe that requires repair shall be repaired at a threaded coupling, not by use of a compression coupling.
- D. Protect Existing Air Handling Systems:
 - 1. Contractor shall be responsible for protection of the cleanliness of the existing air handling system at all times. This protection shall include:
 - a. During site work or building demolition, prefilters shall be provided and maintained on all building outside air intakes at all times throughout the construction duration.

- b. During any interior work that may create dust in the interior space and adjacent corridor/hallways, air filters shall be provided and maintained on all affected air return and exhaust grilles. Where air flow in or out of the space is not required, all air duct openings shall be temporarily blanked off with plywood or sheet metal.
 - c. Prior to starting any work, the Contractor shall record and submit to the Owner's Authorized Representative, pressure readings across all existing air handler air filter banks before installation of new prefilters.
 - d. Upon completion of all Work affecting existing air handling systems, the Contractor shall remove all temporary filters, covers and associated parts and restore the system to its original operating condition unless otherwise stated elsewhere in the Contract Documents
- E. Clean, repair, resurface, or restore existing surfaces to their original, or better, condition, or completely replace such surfaces to match existing, where damaged by construction operations.
- F. Security is the responsibility of the Contractor.
- G. Construction Debris:
- 1. Debris shall not be allowed to remain around the buildings during performance of Work, but shall be disposed of as rapidly as it accumulates.
 - 2. On completion of Work, the buildings and grounds shall be left in a condition that is equal to or better than original condition.
 - 3. In case of failure to do so, the Owner may remove rubbish and charge the cost to the Contractor.
- H. The Contractor shall manage a safe job environment for both the safety of all the people around the Work site as well as the safety of the Owner's and general public's property.
- I. The Contractor shall provide and maintain suitable barricades, shelters, lights, and danger signals during the progress of the Work; they shall meet the requirements of the local building code and OSHA.

1.04 DRAINAGE

- A. Verify that all rain drains in the construction areas are in working order and notify the Owner's Authorized Representative in writing of any rain drains that are plugged, prior to the start of the Work.
- B. Start of Work will be considered as acknowledgment that all drains are clear and in good working order.
- C. All drains shall be left in a clean and proper working condition.

1.05 CONSTRUCTION PROJECT SAFETY FORM

- A. Contractor shall submit to the Owner, prior to signing the Contract, the completed

"Construction Project Safety Form", which is provided with instructions at the end of this Section.

1.06 TEMPORARY UTILITIES

- A. Temporary Utilities:
 - 1. Prepare a schedule indicating dates for implementation and termination of each temporary utility.
 - 2. At the earliest feasible time, when acceptable to the Owner, change over from use of temporary service to use of the permanent service.
- B. Conditions of Use:
 - 1. Keep temporary services and facilities clean and neat in appearance.
 - 2. Operate in a safe and efficient manner.
 - 3. Take necessary fire prevention measures.
 - 4. Do not overload facilities or permit them to interfere with progress.
 - 5. Do not allow hazardous, dangerous or unsanitary conditions, or public nuisances to develop or persist on the site.
- C. Electrical Service:
 - 1. Service limited to 20 amp 120V circuits will be paid for by the Owner.
 - 2. Connection to the service shall be the responsibility of the Contractor, with the Owner's approval.
 - 3. Coordinate with the Owner's Authorized Representative.
- D. Water Service:
 - 1. Service in reasonable quantities for the Project will be paid for by the Owner.
 - 2. Connection to the service shall be the responsibility of the Contractor, with the Owner's approval.
 - 3. Coordinate with the Owner's Authorized Representative.

1.07 TEMPORARY SUPPORT FACILITIES

- A. Temporary Sanitary Facilities:
 - 1. Provide and maintain an adequate number of facilities for the use of all persons employed on the Work during construction.
 - 2. Provide enclosed, weatherproof facilities with heat as required.
 - 3. Use of new or existing Owner's facilities will not be permitted.
- B. Temporary Heat and Ventilation:
 - 1. As necessary, provide temporary heat and ventilation required by construction activities, for curing or drying of completed installations or protection of installed construction from adverse effects of low temperatures or high humidity. Select safe equipment that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce the ambient condition required and minimize consumption of energy.

- C. Telephone Equipment: Provide telephone communications at project site.
- D. Existing Services:
 - 1. Do not interrupt any existing service.
 - 2. Prior request and approval of the Owner's Representative will enable the Owner to shut down any utility required by the Work.
 - 3. Contractor shall not shut down utilities.

1.08 TEMPORARY BARRIERS AND ENCLOSURES

- A. Provide barriers and fencing to prevent unauthorized entry to construction areas and to protect existing facilities and adjacent properties from damage.
- B. Provide Commercial grade chain link fence construction.
- C. Provide 6 foot high fence around construction site as directed by Owner's Authorized Representative; equip with vehicular and pedestrian gates with lock.
- D. Exterior Closures: Provide temporary secured, weather-tight closures at exterior openings, to permit acceptable working conditions and protection of the Work.
- E. Interior Closures:
 - 1. Provide temporary floor to ceiling partitions (not plastic sheeting) and ceilings as required to separate work areas from Owner occupied areas, to prevent penetration of dust and moisture into Owner occupied areas, to reduce construction noise, and to prevent damage to existing materials and equipment.
 - 2. Paint surfaces exposed to view from Owner occupied areas.

1.09 ODORS

- A. Work that causes excessive odors shall be performed only after coordination with the Owner's Authorized Representative. Filtering of air intakes to units may be required to prevent odors and vapors from entering the buildings.
- B. Contractor shall provide 7 days advance notice to the Owner's Authorized Representative in order for advance notice to be forwarded to building occupants. Work stoppage may occur if advance notification has not been coordinated or odors and vapors from the work are found to generate complaints from building occupants.

1.10 FIRE SAFETY

- A. Ensure that required exit routes remain unobstructed while building is occupied.
- B. Abide by all fire safety requirements for buildings under construction, alteration or demolition as required by Article 87, of the Uniform Fire Code as adopted by the State of Oregon.
- C. An emergency telephone shall be provided on site. Cellular telephone equipment is acceptable.
- D. Fire Suppression Equipment:

1. Install and maintain temporary fire protection facilities of the types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 10 "Standard for Portable Fire Extinguishers", and NFPA 241 "Standard for Safeguarding Construction, Alterations and Demolition Operations".
2. Maintain equipment in working condition with current inspection certificate attached to each.
3. Locate fire extinguishers where convenient and effective for their intended purpose, but not less than one extinguisher on each floor at or near each usable stairwell.
4. Store combustible materials in containers in fire-safe locations.
5. Maintain unobstructed access to fire extinguishers, fire hydrants, temporary fire protection facilities, stairways, and other access routes for fighting fires.
- 6.
6. Provide continual supervision of welding operations, combustion type temporary heating units, and similar sources of fire ignition.
7. When possible, relocate hot work to a designated hot work area.
8. If the materials or equipment cannot be relocated to a designated hot work area, use the least hazardous form of hot work that will get the job done and prepare the area properly.
9. Manage mobile hot work using the formal hot work permit system. (mentioned in the next bullet point and also a directive in the OSU Hot Work Safety Program)
10. Make sure both fire protection and hot work equipment work properly.
11. Train all personnel involved in hot work operations and activities so that they have the understanding, knowledge, and skills necessary to safely perform their jobs.

1.11 CONSTRUCTION AIDS

- A. Scaffolding: comply with applicable OSHA requirements.
- B. Material Handling Equipment:
 1. Provide necessary cranes, hoists, towers, or other lifting devices.
 2. Use only experienced operators.
 3. Remove equipment as soon as possible after task is ended.
 4. Coordinate placement of such equipment with Owner's Authorized Representative.
 5. Obtain required permits and meet requirement of governing authorities regarding applicable regulations.
- C. Materials or debris shall not be allowed to free fall from building.
- D. The use of chutes or conveyors must be approved by Owner.

1.12 TEMPORARY CONTROLS


- A. Water Control:
 1. Maintain excavations free of water.
 2. Provide, operate, and maintain necessary pumping equipment.

- B. Protection:
 - 1. Protect installed Work and provide special protection where specified in individual specification sections.
 - 2. Prohibit traffic or storage upon waterproofed or roofed surfaces.
- C. Security:
 - 1. Provide security and facilities to protect Work and existing facilities and Owner's operations from unauthorized entry, vandalism, or theft.
 - 2. Coordinate operations with Owner's Authorized Representative.
- D. Temporary Traffic Control /Pedestrian Accessibility
 - 1. A continuous route for all pedestrians, including persons with disabilities and bicyclists, shall be maintained at all times. When existing pedestrian facilities are disrupted, closed, or relocated in a construction zone, temporary pedestrian facilities shall be provided.
 - 2. Temporary pedestrian facilities should be safe and accessible. There should be no curbs or abrupt changes in grade that could cause tripping or be a barrier to wheelchair use.
 - 3. Signage shall be provided directing people to the temporary accessible route. The signage shall include the International Symbol of Accessibility.
 - 4. Contractors shall not block temporary walkways with vehicles, equipment, construction materials, signs, trash, or other objects that might prohibit pedestrian passage.
 - 5. Construction equipment and equipment operation must be separated from any open walkways. At construction zones, pedestrian fences or other protective barriers shall be provided to prevent access into the construction zone.

1.13 PROJECT SIGNAGE

- A. Contractor is permitted to post only one project identification sign based on the following example:

OSU TYPICAL JOB SIGN

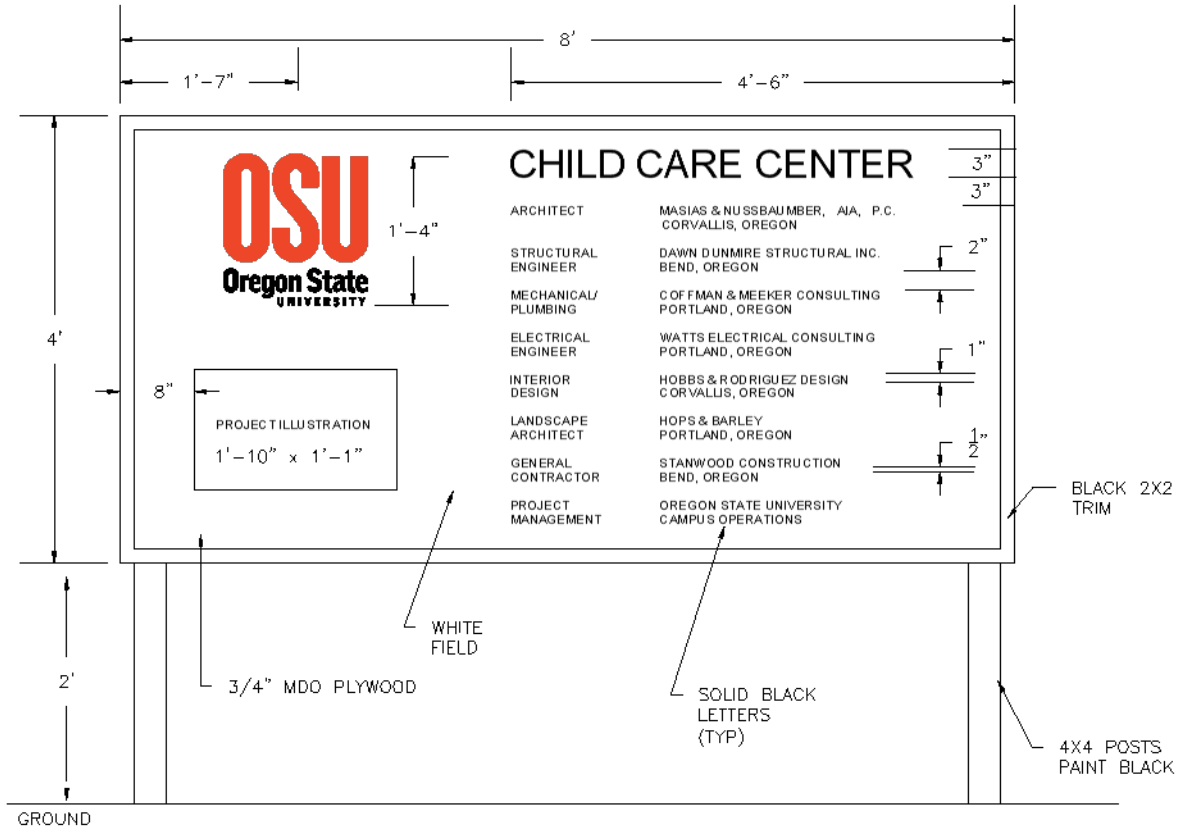

1.14 PREPARATION

- Consult with Owner to review jobsite areas required for field offices, material storage and stockpiles, equipment storage, access to different locations, etc.

1.15 PERFORMANCE

- Confine equipment, apparatus, and storage of material to work limits. The Owner will not be responsible for protection of materials and equipment from damage, pilfering, etc.
- Install temporary facilities in such a manner that the installed work will not be damaged.
- Do not use facilities of existing building unless authorized in writing by the Owner.
- Effective September 1, 2012, OSU became a non-smoking campus and smoking is prohibited on all Campus property.
- Keep facilities well maintained.
- Relocate temporary facilities as required during job progress.

- G. At Substantial Completion, clean and renovate permanent facilities that have been used during the construction period, including but not limited to:
1. Replace air filters and clean inside of ductwork and housings.
 2. Replace significantly worn parts and parts that have been subject to unusual operating conditions.
 3. Replace lamps that are burned out or noticeably dimmed by substantial hours of use.

END OF SECTION

Oregon State University Construction and Maintenance Safety Requirements

EH&S, 100 Oak Creek Building, Corvallis, OR 97331-7405, (541) 737-2273,
FAX (541) 737-9090

Complete OSU Construction and Maintenance Safety Form - Send completed documents (including Site Safety Plan and all separate answer pages) to Construction Contract Administration along with the signed contract and bonds.

Project Isolation - All construction and remodeling activities regardless of size and/or scope must be fenced, barricaded, or otherwise protected to restrict entrance and to ensure the safety of those in the general area. See isolation requirements.

Site Safety Plan - A site safety plan will be required and will address:

- General Information
- Emergency Information
- Key Organization Personnel
- Hazard Evaluation/Facility Impact
- Emergency Procedures
- Work Zones
- Security Measures
- Fire Protection

A model plan is attached. This form can be used if another plan has not already been prepared. Contact OSU Environmental Health & Safety for more information 737-2505.

Isolation Requirements

General: All construction, maintenance, and remodeling activities, regardless of size or scope, must be fenced, barricaded, or otherwise isolated to restrict entrance and to ensure the safety of those in the general area.

Outdoor Activities: Outdoor projects require the following perimeter isolation:

- A six foot chain-link fence, with controlled access points, extending in all directions around the excavation or building site such that no area of the construction is accessible to pedestrians or unauthorized personnel or vehicles.
- Isolation area will include vehicle loading and unloading areas.
- At the University's option, other barricading plans may be accepted. These may apply to projects such as road resurfacing, parking lot striping, exterior building water proofing, deliveries, etc. Contact EH&S regarding other barricading plans.

Overnight: Any excavation across or adjacent to sidewalks or pathways which must be left open overnight, must be identified with working, blinking construction lights in addition to solid barricades

Indoor Activities: Indoor construction or maintenance projects which will create dust, potentially hazardous fumes or vapors, or offensive odors are subject to the following isolation:

- Areas where existing doors can provide isolation will be labeled "Construction Area--Authorized Personnel Only".

- All other areas will be isolated by a solid barrier. The minimum barrier allowed is 4 mil poly sheeting sealed to prevent migration of dust.
- Mechanical ventilation may be required.
- A solid wall is required if building envelope is opened to the outside.

Contractor Responsibilities

- The contractor will provide all barricading, isolation, and fencing material. OSU will not provide any materials.
- The contractor will also provide all appropriate warning and detour signs when sidewalks, exits, or roads are closed.
- Contractor will provide all other construction area signs.

OSU Construction and Maintenance Safety Form

Send completed safety documents to Construction Contract Administration with contract and bonds.

Date: _____ Project: _____

Start Date: _____ Completion date: _____

Contractor: _____ Contact: _____

Work # _____ 24 hr #: _____

OSU Project Mgr: _____ Work / 24hr #'s: _____

Dept Contact: _____ OSU EH&S Contact: _____

Preconstruction meeting? **Y N** Date/Time/Location: _____

For the following items, prepare answers on a separate sheet for all items marked "Yes". Precede each answer with the appropriate item number. All boxes need to be checked

Y	N	For This Project	If YES, then:
		1 Will any confined spaces be accessed?	Describe location of entry Specify location of permit Notify EH&S prior to entry See SAF 209
		2 Will hot work be performed (welding, cutting, brazing, etc.)?	Provide min. 5# 2A10BC extinguisher within 10 ft If indoors - provide and describe ventilation See SAF 214
		3 Any products brought to campus?	Provide MSDS on site prior to first use; Make available to OSU on request
		4 Will lead paint be impacted?	Describe plan to limit contamination
		5 Will asbestos-containing-material be impacted?	Coordinate with OSU asbestos manager
		6 Will <u>any</u> materials (construction debris, soil, water, etc) be removed from campus?	Describe in detail identity and disposition of material (how, where)
		7 Any open trenches or holes?	Describe isolation procedures (see Page 1)
		8 Will a crane be used?	Describe crane safety plan (include plan to prevent loads above occupied areas)
		9 Is this project building a new facility, a major remodel?	Provide Site Safety plan Describe isolation procedures (see Page 1)
		10 Is this a minor remodeling project?	Provide, or fill out model Site Safety Plan form (see Page 3) Describe isolation procedures (see Page 1)
		11 Will air contamination be produced (e.g. dust, CO, solvent vapors, VOCs, odors)?	Describe project ventilation and isolation Indicate position of building air intake(s)
		12 Will there be noise > 85 dB?	Describe noise minimization plan
		13 Will this project use a scaffold or an external chute?	Describe isolation, dust control, installation
		14 Will this project involve a working surface >6' above a lower level	Describe fall protection
		15 Will any "blind" saw-cuts or penetrations be made in existing foundations, floors, ceilings and/or walls?	Describe plan for detecting and protecting power lines or other building utility lines.

EH&S Review: _____ Date: _____

Model Site Safety Plan

1. General Information

Contractor name _____
 Address _____
 City, State, Zip _____
 Site Safety Officer _____ Project Dates _____
 Project Name _____

2. Emergency Information

Emergency Response	911	OSU EH&S and OSU Facilities Services must be notified in the event of an emergency
Hazardous Materials Spill		
MSDS on-site location		
OSU EH&S	(541) 737-2273	
Facilities Services	(541) 737-2969	

3. Contractor Key Personnel

	Name	Phone	Emergency Contact
Company Owner			
Project Manager			
Job Supervisor			
Site Safety Officer			
Other Responsible Individual			
24 Hour Notification			

List of employees on site _____

4. Hazard Evaluation/ Facility Impact	
Physical	Yes / No
Heavy Equipment	
Noise	
Heat	
Elevation	
Radiation Materials	
Excavations	
Underground Utilities	
Confined Spaces	
Fire Prevention	
Electrical	

5. Emergencies
Services
Evacuation Route
First Aid Location
Hazardous Materials Spill Procedure

6. Work Zones

Material Storage _____
 Parking locations _____
 Individuals with OSU keys _____
 Access issues _____

7. Security measures

8. Fire protection

SECTION 01 56 39

TREE AND PLANTING PROTECTION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Section includes temporary fencing, barricades, and guards to protect trees, plants and groundcovers not indicated to be removed, as necessary and required to prevent damage above and below grade.

1.02 DEFINITIONS

- A. Dripline: Outer perimeter of branches of any tree or plant.
- B. Groundcover: Includes but not limited to plants and grass.

1.03 PERFORMANCE REQUIREMENTS

- A. The Contractor shall exercise utmost care to protect existing trees and plants designated to remain and shall comply with all protection requirements provided by Owner and City of Corvallis as conveyed through the Owner's Authorized Representative.
- B. The Contractor shall install tree protection fencing as detailed and shall prevent damage to shrubs, groundcover, trees, root systems, soil, bark, foliage, branches and limbs due to construction activities, including but not limited to:
 - 1. Soil contamination, erosion, and compaction.
 - 2. Excessive wetting, and ponding due to storm water, and construction run-off.
 - 3. Alteration of grade, stockpiling of soil, debris, and materials.
 - 4. Damage to soil, roots, bark, trunk, limbs, branches, and foliage.
 - 5. Prevent unauthorized cutting, breaking, skinning and bruising of roots, branches, and bark.

1.04 SUBMITTALS

- A. Procedural proposal for tree and plant protection, describe methods of protection, and stabilization, provide drawings and supporting documentation as directed.
- B. Contractor's Condition Inspection; include written report and color photographs.

1.05 PROJECT CONDITIONS

- A. Install protection during initial mobilization at the Work site, and maintain until substantial completion.
- B. If, in the opinion of the Owner's arborist, additional protection is required, the Contractor shall install additional fencing as directed and without cost to the Owner.
- C. The location and requirements for additional fencing shall be determined by the

Owner's arborist prior to, and at any time during the course of the Work.

- D. Fencing:
 - 1. Fencing shall be installed at the tree and plant protection areas as detailed on Plans, or as directed by the Owner's Authorized Representative.
 - 2. Tree and plant protection fences shall remain in place until all Work is completed and shall not be removed or relocated without the approval of the Owner's Authorized Representative.
- E. Driving and Parking:
 - 1. Not permitted off paved surfaces without the approval of the Owner's Authorized Representative.
 - 2. When approved, the Contractor shall place plywood of sufficient thickness and width to support vehicles and prevent rutting on the area to be driven on.
 - 3. Care shall also be taken with respect to existing lawn sprinkler systems.
- F. Storage of materials and Debris: Not permitted off paved surfaces.

PART 2 PRODUCTS

2.01 MANUFACTURED COMPONENTS

- A. Chain Link Fencing: 11 gage galvanized chain link, six feet tall, and 1.5 inch inside diameter galvanized steel line posts and 2.5 inch inside diameter corner posts, provide lockable gates as necessary.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verification of Conditions: Inspect trees, plants, and groundcovers, document existing conditions prior to installation of protection.

3.02 EXECUTION

- A. Pruning and Cutting of Roots, Branches and Foliage:
 - 1. Review conditions with Architect or Owner prior to need for work, and proceed as directed.
 - 2. All pruning to be done by Owner's landscape maintenance personnel or ISA Certified arborist under the direction of Owner's Landscape Management Department.
 - 3. Perform pruning and cutting with sharp instruments intended for the purpose; do not break or chop.
- B. Root Cuttings:
 - 1. Carefully and cleanly cut roots and branches of trees indicated to be left standing

where such roots and branches obstruct new construction.

2. Protect exposed roots with wet burlap until they can be covered with soil.
- C. Excavation and Trenching Within Drip Lines:
1. Permitted where indicated, and at other specifically approved locations.
 2. Tunnel under or around roots by hand digging or boring.
 3. Do not cut main lateral roots and tap roots over one inch diameter; cut smaller roots which interfere with installation of new Work.
 4. Do not allow exposed roots to dry out before permanent backfill is placed; provide temporary earth cover, or pack with peat moss and wrap with burlap.
 5. Water and maintain roots in moist condition and temporarily support and protect from damage until permanently relocated and covered with backfill.
- D. Existing Grading: Maintain within drip line of trees and plants unless otherwise indicated on the drawing and approved by the Owner's Authorized Representative.
- E. Tree Protection:
1. Provide temporary fence complying with Section 01 51 00 for protection of trees to remain.
 2. Extend fencing ten feet beyond dripline, except where greater distance is required for protection of Elm trees.
 3. Prevent entry into protected areas except as authorized in writing by the Owner's Authorized Representative.

3.03 REPAIR AND REPLACEMENT OF TREES AND PLANTS

- A. Repair trees or shrubs damaged by construction operations as directed by the Owner.
- B. Make repairs promptly after damage occurs to prevent progressive deterioration of damaged trees.
- C. Damaged Trees, Shrubs and Groundcover:
1. Replace where Owner's Authorized Representative determines restoration to normal growth pattern is not possible; plant and maintain as directed.
 2. Replacement trees up to 13 inches caliper and shrubs up to 4 feet tall: Same size as damaged tree or shrub, species selected by the Owner's Authorized Representative.
 3. Trees over 13 inch caliper and shrubs greater than 4 feet tall: Compensate Owner as determined by an acceptable consulting arborist registered with the American Society of Consulting Arborists.
 4. Replacement groundcovers: Same size and quality as damaged species selected by Owner's Authorized Representative.

END OF SECTION

SECTION 01 60 00

PRODUCT REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Summary:
 - 1. Product options.
 - 2. Owner-furnished products.
 - 3. Product delivery, storage and handling.

1.02 PRODUCTS

- A. Products:
 - 1. New material, machinery, components, equipment, fixtures, and systems forming the Work, but does not include machinery and equipment used for preparation, fabrication, conveying and erection of the Work.
 - 2. Products may also include existing materials or components specifically identified for reuse.
- B. Use interchangeable components of the same manufacture for similar components.
- C. Unless otherwise specified, all material and equipment shall be new; free from defects impairing strength, durability, and appearance; of current manufacture.
- D. Items specified shall be considered minimum as to quality, function, capacity, and suitability for application intended.
- E. Items incorporated into the Work shall conform to applicable specifications and standards designated, and shall be of size, make, type, and quality specified.
- F. Design, fabricate, and assemble in accordance with current best engineering, industry, and shop practices.
- G. Manufacture like parts of duplicate units to standard size and gauge to make them interchangeable.
- H. Two or more items of the same kind shall be identical and made by the same manufacturer.

1.03 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.
- C. Products Specified by Naming One [or More] Manufacturer[s]: Products of manufacturer[s] named and meeting specifications, no options or substitutions

allowed.

D. Substitution Procedure: Under Section 01 25 00.

1.04 REUSE OF EXISTING PRODUCTS

- A. Except as specifically indicated or specified, materials and equipment removed from existing construction shall not be used in the completed Work.
- B. For material and equipment specifically indicated or specified to be reused in the Work:
 - 1. Use care in removal, handling, storage, and reinstallation to assure proper function in the completed Work.
 - 2. Arrange for transportation, storage, and handling of products which require off-site storage, restoration, or renovation.
 - 3. Remove and reinstall mechanical units, vents, guys, antennae, and electrical and grounding wires or conduits.

1.05 OWNER FURNISHED PRODUCTS

- A. Designate delivery dates of Owner-furnished items in the construction schedule.
- B. Receive, unload, store and handle Owner-furnished items at the site; protect from damage.

1.06 DELIVERY, STORAGE AND HANDLING

- A. Transport, handle, store and protect products in accordance with manufacturer's instructions.
- B. Arrange deliveries in accordance with construction schedules; coordinate to avoid conflict with Work and site conditions.
- C. Deliver and store products in undamaged condition in manufacturer's original containers or packaging with identifying labels intact and legible.
- D. Inspect shipments to assure compliance with Contract Documents and reviewed submittals, and that products are undamaged.
- E. Prevent soiling or damage to products or packaging.
- F. Interior Storage: Maintain required temperature and humidity ranges. Verify that Owner furnished storage meets product manufacturer's requirements.
- G. Exterior Storage:
 - 1. Store materials above ground to prevent soiling and/or moisture infiltration.
 - 2. Cover materials with waterproof breathable sheet coverings; provide adequate ventilation.
 - 3. All storage locations to be approved in advance by the Owner.
- H. Arrange storage to provide access for inspection.
- I. Coordinate with Owner's Authorized Representative all on-site storage activities.

J. Provide for security of stored products.

END OF SECTION

SECTION 01 73 29

CUTTING AND PATCHING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Requirements and limitations for cutting and patching of Work.

1.02 RELATED SECTIONS

- A. Section 01 25 00, Product Substitution Procedures.
- B. Section 01 33 23, Shop Drawings, Product Data, Samples

1.03 SUBMITTALS

- A. Submit written request in advance of cutting or alteration which affects:
 - 1. Structural integrity of any element of the Work.
 - 2. Efficiency, maintenance, or safety of any operational element.
 - 3. Visual qualities of sight exposed elements.
 - 4. Work of Owner or separate contractor.
- B. Include in request:
 - 1. Identification of project.
 - 2. Location and description of affected work.
 - 3. Necessity for cutting or alteration.
 - 4. Description of proposed work, and products to be used.
 - 5. Alternatives to cutting and patching.
 - 6. Effect on work of Owner or separate contractor.
 - 7. Written permission of affected separate contractor.
 - 8. Date and time work will be executed.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Primary Products: Those required for original installation.
- B. Product Substitution: For any proposed change in materials, submit request for substitution under provisions of Section 01 25 00.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Inspect existing conditions prior to commencing Work, including elements subject to

damage or movement during cutting and patching.

- B. After uncovering existing work, inspect conditions affecting performance of Work.
- C. Beginning of cutting or patching means acceptance of existing conditions.

3.02 PREPARATION

- A. Provide temporary supports to ensure structural integrity of the Work.
- B. Provide devices and methods to protect other portions of the Work from damage.
- C. Provide protection from elements for areas which may be exposed by uncovering work.

3.03 CUTTING AND PATCHING

- A. Execute cutting, fitting and patching to complete work.
- B. Fit products together, to integrate with other work.
- C. Remove and replace defective or non-conforming work.
- D. Provide openings in the work for penetration of mechanical and electrical work.

3.04 PERFORMANCE

- A. Execute work by methods to avoid damage to other Work, and which will provide appropriate surfaces to receive patching and finishing.
- B. Cut rigid materials using masonry saw or core drill. Pneumatic tools are not allowed without prior approval from Owner's Authorized Representative.
- C. Restore work with new products in accordance with requirements of Contract Documents.
- D. At penetrations of fire rated walls, partitions, ceiling or floor construction, completely seal voids with approved fire rated material, to full thickness of the penetrated element.
- E. Refinishing:
 - 1. Refinish surfaces to match adjacent finish.
 - 2. For continuous surfaces, refinish to nearest intersection or natural break.
 - 3. For an assembly, refinish entire unit.

END OF SECTION

SECTION 01 74 00

CLEANING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Related requirements specified elsewhere, cleaning for specific products or work: Specification section for that work.
- B. Maintain premises and public properties free from accumulations of waste, debris, and rubbish, caused by operations.
- C. At completion of Work remove waste materials, rubbish, tools, equipment, machinery and surplus materials, and clean all sight-exposed surfaces; leave project clean and ready for occupancy.

1.02 QUALITY ASSURANCE

- A. Standards: Maintain project in accord with applicable safety and insurance standards.
- B. Hazard Control:
 - 1. Store volatile wastes in covered metal containers.
 - 2. Provide adequate ventilation during use of volatile or noxious substances.

1.03 MATERIALS

- A. Use only cleaning materials recommended by manufacturer of surface to be cleaned.
- B. Use cleaning materials only on surfaces recommended by cleaning material manufacturer.

1.04 DURING CONSTRUCTION:

- A. Wet down dry materials and rubbish to lay dust and prevent blowing dust.
- B. At reasonable intervals during progress of Work clean site and public properties, and dispose of waste materials, debris and rubbish.
- C. Provide on-site containers for collection of waste materials, debris and rubbish.
- D. Remove waste materials, debris and rubbish from site and legally dispose of at public or private dumping areas off Owner's property.
- E. Vacuum clean interior building areas when ready to receive finish painting, and continue vacuum cleaning on an as-needed basis until project is ready for Substantial Completion or occupancy.
- F. Handle materials in a controlled manner with as few handlings as possible; do not drop or throw materials from heights.

1.05 FINAL CLEANING

- A. Employ experienced workers, or professional cleaners, for final cleaning.
- B. In preparation for Substantial Completion or occupancy, conduct final inspection of sight-exposed interior and exterior surfaces, and of concealed spaces.
- C. Remove grease, dust, dirt, stains, labels, and other foreign materials from exposed interior and exterior finished surfaces.
- D. Remove putty, paint, labels, lubricants, etc., from windows, mirrors, and sash, and then polish, taking care not to scratch glass.
- E. Vacuum carpeting (shampoo where required), removing debris and excess nap.
- F. Repair, patch and touch up marred surfaces to specified finish, to match adjacent surfaces.
- G. Replace air filters where units were operated during construction.
- H. Maintain cleaning until project, or portion thereof, is occupied by Owner.

END OF SECTION

SECTION 01 77 00

CONTRACT CLOSEOUT

PART 1 GENERAL

1.01 DESCRIPTION

- A. The requirements specified in this section relate to all Contractors individually performing under these Contract Documents:
 - 1. Project Record Documents.
 - 2. Final review and payment.
- B. Related work specified elsewhere:
 - 1. OSU General Conditions.
 - 2. Shop Drawings, Product Data and Samples, Section 01 33 23.

1.02 PROJECT RECORD DOCUMENTS

- A. The Project Record Documents shall be organized to include the following information, as applicable:
 - 1. Table of Contents
 - 2. Project Team List
 - 3. Specifications (Including Addenda and Change Orders)
 - 4. Drawings
 - 5. Inspection Reports
 - 6. Signed Warranty(ies)
 - 7. Maintenance Instructions
- B. Draft Project Record Documents shall be submitted for review upon 75% completion of the Work.
- C. Project Record Documents shall be submitted electronically to the Owner. Hard copies will not be accepted.
- D. The project team list shall include the name, address, and phone number of the Owner, Contractor, Inspector, Subcontractors, and the materials manufacturers.
- E. Legibly mark each Specification section to indicate actual as-built condition indicating changes in the Work made by addenda or change order or actual materials used and actual manufacturer(s) used.
- F. Maintain current and accurate as-built mark-ups during construction and make available to Owner's Authorized Representative upon request.
- G. Legibly mark the drawings to indicate actual as-built conditions indicating changes in the Work made by addenda or change order or actual conditions which differ from the drawings.
- H. Redraw or provide new drawings as required for a complete as-built set of drawings.

The Contractor shall maintain current and accurate as-built mark-ups during construction and make available to Owner's Authorized Representative.

- I. Include inspection reports if applicable.
- J. Include, in a single section, all copies of the Project's labor and material warranties clearly marked to identify the Owner's responsibilities under the terms of each warranty and the section of Work that each warranty covers. One set must be clearly marked as containing original documents.
- K. In the case of an elevator installation, the Contractor's and manufacturer's warranty shall provide for the Owner's right to respond to emergency/car failure situations for the purpose of extricating individuals trapped in the elevator.
- L. Include maintenance instructions complete with technical information and name, address, and phone number of the Contractor(s) and manufacturer(s) of each material and product.

1.03 FINAL REVIEW AND PAYMENT

- A. Prior to completion, the Contractor shall inspect the Work and make a Punch-list noting all items that are incomplete and/or incorrect.
- B. The Contractor shall notify all Subcontractors in writing of incomplete and/or incorrect items. Notify far enough in advance of the completion date that the Work can be completed on schedule. Said Work shall be immediately corrected.
- C. Should conditions prevail which prohibit some elements of the Work from being accomplished, but the work-in-place will perform the primary function (i.e., painting cannot be completed due to high moisture content of masonry walls.) the Contractor shall record the reason with this Punch-list item requesting temporary delay in completion from the Owner in writing.
- D. Notify the Owner in writing that all items are completed and ready for final review or else that the Work product is fully usable, but some listed deficiencies remain to be completed. Submit all record documents at this time.
- E. The Owner will review all documents. When the documents include a Contractor's request for delay in completion, the Owner will review all Work which is certified as complete to the best knowledge of the Contractor. The Owner will also review the listed incomplete Work and assign a value to such uncompleted work.
- F. The Contractor shall make the required corrections to the Work expeditiously. A letter will be addressed to the Contractor informing the Contractor of the project status.
- G. When Contract closeout procedures are completed and all Punch-list deficiencies have been corrected, provide Owner with final corrected Project Record Documents based on Owner's preliminary review. Correct Project Record Documents shall be in electronic format.

- H. Final Completion by the Owner will be documented and the Contractor will receive written notice of acceptance of the Work and notification that final payment may be billed and released.
- I. All warranties shall commence and become effective beginning on the date of Substantial Completion.

END OF SECTION

SECTION 02 4100
DEMOLITION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Selective demolition of built site elements.
- B. Selective demolition of building elements for alteration purposes.

1.02 RELATED REQUIREMENTS

- A. Section 01 1000 - Summary: Limitations on Contractor's use of site and premises.
- B. Section 01 1000 - Summary: Sequencing and staging requirements.
- C. Section 01 1000 - Summary: Description of items to be removed by Oregon State University.
- D. Section 01 1000 - Summary: Description of items to be salvaged or removed for re-use by Contractor.
- E. Section 01 51 00 - Temporary Facilities and Controls: Site fences, security, protective barriers, and waste removal.
- F. Section 01 6000 - Product Requirements: Handling and storage of items removed for salvage and relocation.
- G. Section 01 77 00 - Execution and Closeout Requirements: Project conditions; protection of bench marks, survey control points, and existing construction to remain; reinstallation of removed products; temporary bracing and shoring.

1.03 REFERENCE STANDARDS

- A. 29 CFR 1926 - U.S. Occupational Safety and Health Standards; current edition.
- B. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2013.

1.04 SUBMITTALS

- A. See Section 01 33 23 - Shop drawings, product data, samples
- B. Site Plan: Showing:
 - 1. Vegetation to be protected.
 - 2. Areas for temporary construction and field offices.
 - 3. Areas for temporary and permanent placement of removed materials.
- C. Demolition Plan: Submit demolition plan as specified by OSHA and local authorities.
 - 1. Indicate extent of demolition, removal sequence, bracing and shoring, and location and construction of barricades and fences.
 - 2. Identify demolition firm and submit qualifications.
- D. Project Record Documents: Accurately record actual locations of capped and active utilities and subsurface construction.

1.05 QUALITY ASSURANCE

- A. Demolition Firm Qualifications: Company specializing in the type of work required.

PART 2 PRODUCTS

PART 3 EXECUTION

3.01 SCOPE

- A. Remove portions of existing buildings as indicated on drawings
- B. Remove other items indicated, for salvage, relocation, and recycling.
- C. Fill excavations, open pits, and holes in ground areas generated as result of removals, using specified fill; compact fill .

3.02 GENERAL PROCEDURES AND PROJECT CONDITIONS

- A. Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.
 - 1. Obtain required permits.
 - 2. Take precautions to prevent catastrophic or uncontrolled collapse of structures to be removed; do not allow worker or public access within range of potential collapse of unstable structures.
 - 3. Provide, erect, and maintain temporary barriers and security devices.
 - 4. Conduct operations to minimize effects on and interference with adjacent structures and occupants.
 - 5. Do not close or obstruct roadways or sidewalks without permit.
 - 6. Conduct operations to minimize obstruction of public and private entrances and exits; do not obstruct required exits at any time; protect persons using entrances and exits from removal operations.
 - 7. Obtain written permission from owners of adjacent properties when demolition equipment will traverse, infringe upon or limit access to their property.
- B. Do not begin removal until receipt of notification to proceed from Oregon State University.
- C. Protect existing structures and other elements that are not to be removed.
 - 1. Provide bracing and shoring.
 - 2. Prevent movement or settlement of adjacent structures.
 - 3. Stop work immediately if adjacent structures appear to be in danger.
- D. Minimize production of dust due to demolition operations; do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.
- E. If hazardous materials are discovered during removal operations, stop work and notify Oregon State University; hazardous materials include regulated asbestos containing materials, lead, PCB's, and mercury.

3.03 EXISTING UTILITIES

- A. Coordinate work with utility companies; notify before starting work and comply with their requirements; obtain required permits.
- B. Protect existing utilities to remain from damage.
- C. Do not disrupt public utilities without permit from authority having jurisdiction.
- D. Do not close, shut off, or disrupt existing life safety systems that are in use without at least 7 days prior written notification to Oregon State University.
- E. Do not close, shut off, or disrupt existing utility branches or take-offs that are in use without at least 3 days prior written notification to Oregon State University.
- F. Locate and mark utilities to remain; mark using highly visible tags or flags, with identification of utility type; protect from damage due to subsequent construction, using substantial barricades if necessary.
- G. Remove exposed piping, valves, meters, equipment, supports, and foundations of disconnected and abandoned utilities.

3.04 SELECTIVE DEMOLITION FOR ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as indicated.
 - 2. Report discrepancies to Waterleaf Architecture before disturbing existing installation.
 - 3. Beginning of demolition work constitutes acceptance of existing conditions that would be apparent upon examination prior to starting demolition.
- B. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove items indicated on drawings.

- C. Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove existing systems and equipment as indicated.
 - 1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components.
 - 2. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
 - 3. Verify that abandoned services serve only abandoned facilities before removal.
 - 4. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification.
- D. Protect existing work to remain.
 - 1. Prevent movement of structure; provide shoring and bracing if necessary.
 - 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 - 3. Repair adjacent construction and finishes damaged during removal work.
 - 4. Patch as specified for patching new work.

3.05 DEBRIS AND WASTE REMOVAL

- A. Remove debris, junk, and trash from site.
- B. Leave site in clean condition, ready for subsequent work.
- C. Clean up spillage and wind-blown debris from public and private lands.

END OF SECTION

SECTION 05 5000
METAL FABRICATIONS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Shop fabricated steel items.

1.02 RELATED REQUIREMENTS

- A. Section 09 9113- Painting and Coating

1.03 REFERENCE STANDARDS

- A. ASTM A36/A36M - Standard Specification for Carbon Structural Steel; 2014.
- B. AWS A2.4 - Standard Symbols for Welding, Brazing, and Nondestructive Examination; 2012.
- C. AWS D1.1/D1.1M - Structural Welding Code - Steel; 2015.
- D. SSPC-Paint 15 - Steel Joist Shop Primer/Metal Building Primer; 1999 (Ed. 2004).

1.04 SUBMITTALS

- A. See Section 01 33 23 - Shop drawings, product data, samples
- B. Shop Drawings: Indicate profiles, sizes, connection attachments, reinforcing, anchorage, size and type of fasteners, and accessories.
 - 1. Indicate welded connections using standard AWS A2.4 welding symbols. Indicate net weld lengths.
 - 2. Provide templates for anchors and bolts specified for installation under other Sections.

1.05 QUALITY ASSURANCE

- A. Design under direct supervision of a Professional Structural Engineer experienced in design of this Work and licensed in the State of Oregon.

PART 2 PRODUCTS

2.01 MATERIALS - STEEL

- A. Steel Sections: ASTM A36/A36M.
- B. Welding Materials: AWS D1.1/D1.1M; type required for materials being welded.
- C. Shop and Touch-Up Primer: SSPC-Paint 15, complying with VOC limitations of authorities having jurisdiction.

2.02 FABRICATION

- A. Fit and shop assemble items in largest practical sections, for delivery to site.
- B. Fabricate items with joints tightly fitted and secured.
- C. Grind exposed joints flush and smooth with adjacent finish surface. Make exposed joints butt tight, flush, and hairline. Ease exposed edges to small uniform radius.
- D. Supply components required for anchorage of fabrications. Fabricate anchors and related components of same material and finish as fabrication, except where specifically noted otherwise.

2.03 FABRICATED ITEMS

- A. Ledge Angles, Shelf Angles, Channels, and Plates Not Attached to Structural Framing: For support of joists; prime paint finish.
- B. Door Frames for Overhead Door Openings: Channel sections; prime paint finish.

2.04 FINISHES - STEEL

- A. Prime paint steel items.
- B. Prime Painting: One coat.

2.05 FABRICATION TOLERANCES

- A. Squareness: 1/8 inch maximum difference in diagonal measurements.
- B. Maximum Offset Between Faces: 1/16 inch.
- C. Maximum Misalignment of Adjacent Members: 1/16 inch.
- D. Maximum Bow: 1/8 inch in 48 inches.
- E. Maximum Deviation From Plane: 1/16 inch in 48 inches.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive work.

3.02 INSTALLATION

- A. Install items plumb and level, accurately fitted, free from distortion or defects.
- B. Provide for erection loads, and for sufficient temporary bracing to maintain true alignment until completion of erection and installation of permanent attachments.
- C. Obtain approval prior to site cutting or making adjustments not scheduled.

3.03 TOLERANCES

- A. Maximum Variation From Plumb: 1/4 inch per floor, non-cumulative.
- B. Maximum Offset From True Alignment: 1/4 inch.
- C. Maximum Out-of-Position: 1/4 inch.

END OF SECTION

SECTION 07 2500
WEATHER BARRIERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Water-Resistive Barrier: Under exterior wall cladding, over sheathing or other substrate; not air tight or vapor retardant.
- B. Vapor Retarders: Materials to make exterior walls, joints between exterior walls and roof, and joints around frames of openings in exterior walls water vapor resistant and air tight.

1.02 RELATED REQUIREMENTS

- A. Section 07 6200 - Sheet Metal Flashing and Trim: Metal flashings installed in conjunction with weather barriers.
- B. Section 07 9005 - Joint Sealers: Sealant materials and installation techniques.

1.03 DEFINITIONS

- A. Weather Barrier: Assemblies that form either water-resistive barriers, air barriers, or vapor retarders.
- B. Vapor Retarder: Air tight barrier made of material that is relatively water vapor impermeable, to the degree specified, with sealed seams and with sealed joints to adjacent surfaces.
 - 1. Water Vapor Permeance: For purposes of conversion, $57.2 \text{ ng}/(\text{Pa s sq m}) = 1 \text{ perm.}$

1.04 REFERENCE STANDARDS

1.05 SUBMITTALS

- A. See Section 01 33 23 - Shop drawings, product data, samples
- B. Product Data: Provide data on material characteristics.
- C. Manufacturer's Installation Instructions: Indicate preparation.

1.06 FIELD CONDITIONS

- A. Maintain temperature and humidity recommended by the materials manufacturers before, during and after installation.

PART 2 PRODUCTS

2.01 WEATHER BARRIER ASSEMBLIES

- A. Water-Resistive Barrier: Provide on exterior walls under exterior cladding.
 - 1. Use Blueskin HT (High Temperature) HT unless otherwise indicated.
- B. Exterior Vapor Retarder:
 - 1. On outside surface of inside wythe of masonry cavity wall use vapor retarder coating.

2.02 VAPOR RETARDER MATERIALS (AIR BARRIER AND WATER-RESISTIVE)

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces and conditions are ready to accept the work of this section.

3.02 PREPARATION

- A. Remove projections, protruding fasteners, and loose or foreign matter that might interfere with proper installation.

3.03 INSTALLATION

- A. Install materials in accordance with manufacturer's instructions.
- B. Vapor Retarders: Install continuous air tight barrier over surfaces indicated, with sealed seams and with sealed joints to adjacent surfaces.
- C. Openings and Penetrations in Exterior Weather Barriers:

1. Install flashing over sills, covering entire sill frame member, extending at least 5 inches onto weather barrier and at least 6 inches up jambs; mechanically fasten stretched edges.
2. At openings to be filled with frames having nailing flanges, seal head and jamb flanges using a continuous bead of sealant compressed by flange and cover flanges with sealing tape at least 4 inches wide; do not seal sill flange.
3. At openings to be filled with non-flanged frames, seal weather barrier to each side of opening framing, using flashing at least 9 inches wide, covering entire depth of framing.
4. At head of openings, install flashing under weather barrier extending at least 2 inches beyond face of jambs; seal weather barrier to flashing.
5. At interior face of openings, seal gap between window/door frame and rough framing, using joint sealant over backer rod.
6. Service and Other Penetrations: Form flashing around penetrating item and seal to weather barrier surface.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 4000 - Quality Requirements, for additional requirements.
- B. Coordination of ABAA Tests and Inspections:
 1. Provide testing and inspection required by ABAA QAP.
 2. Notify ABAA in writing of schedule for air barrier work, and allow adequate time for testing and inspection.
 3. Cooperate with ABAA testing agency.
 4. Allow access to air barrier work areas and staging.
 5. Do not cover air barrier work until tested, inspected, and accepted.

3.05 PROTECTION

- A. Do not leave materials exposed to weather longer than recommended by manufacturer.

END OF SECTION

SECTION 07 6200
SHEET METAL FLASHING AND TRIM

PART 1 GENERAL

1.01 SECTION INCLUDES

1.02 RELATED REQUIREMENTS

- A. Section 07 25 00 - Weather Barriers
- B. Section 07 9005 - Joint Sealers.
- C. Section 09 9000 - Painting and Coating: Field painting.

1.03 REFERENCE STANDARDS

- A. AAMA 611 - Voluntary Specification for Anodized Architectural Aluminum; 2012.
- B. ASTM A666 - Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar; 2015.
- C. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate; 2014.
- D. ASTM D4586/D4586M - Standard Specification for Asphalt Roof Cement, Asbestos-Free; 2007 (Reapproved 2012).
- E. CDA A4050 - Copper in Architecture - Handbook; current edition.
- F. SMACNA (ASMM) - Architectural Sheet Metal Manual; 2012.

1.04 SUBMITTALS

- A. See Section 01 33 23 - Shop drawings, product data, samples
- B. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations, and installation details.

1.05 QUALITY ASSURANCE

- A. Perform work in accordance with SMACNA (ASMM) and CDA A4050 requirements and standard details, except as otherwise indicated.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Stack material to prevent twisting, bending, and abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
- B. Prevent contact with materials that could cause discoloration or staining.

PART 2 PRODUCTS

2.01 SHEET MATERIALS

- A. Stainless Steel: ASTM A666, Type 304 alloy, soft temper, 28 gage, (0.0156 inch) thick; smooth No. 4 - Brushed finish.

2.02 ACCESSORIES

- A. Fasteners: Stainless steel, with soft neoprene washers.
- B. Primer: Zinc chromate type.
- C. Protective Backing Paint: Zinc molybdate alkyd.
- D. Sealant: Type specified in Section 07 9005.
- E. Plastic Cement: ASTM D4586, Type I.

2.03 FABRICATION

- A. Form sections true to shape, accurate in size, square, and free from distortion or defects.
- B. Form pieces in longest possible lengths.
- C. Hem exposed edges on underside 1/2 inch; miter and seam corners.

- D. Form material with flat lock seams, except where otherwise indicated; at moving joints, use sealed lapped, bayonet-type or interlocking hooked seams.
- E. Fabricate corners from one piece with minimum 18 inch long legs; seam for rigidity, seal with sealant.
- F. Fabricate flashings to allow toe to extend 2 inches over roofing gravel. Return and brake edges.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify roof openings, curbs, pipes, sleeves, ducts, and vents through roof are solidly set, reglets in place, and nailing strips located.
- B. Verify roofing termination and base flashings are in place, sealed, and secure.

3.02 PREPARATION

- A. Install starter and edge strips, and cleats before starting installation.
- B. Back paint concealed metal surfaces with protective backing paint to a minimum dry film thickness of 15 mil.

3.03 INSTALLATION

- A. Secure flashings in place using concealed fasteners, and use exposed fasteners only where permitted..
- B. Apply plastic cement compound between metal flashings and felt flashings.
- C. Fit flashings tight in place; make corners square, surfaces true and straight in planes, and lines accurate to profiles.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 45 00 - Quality Requirements, for field inspection requirements.
- B. Inspection will involve surveillance of work during installation to ascertain compliance with specified requirements.

END OF SECTION

SECTION 07 8400
FIRESTOPPING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Firestopping systems.
- B. Firestopping of joints and penetrations in fire resistance rated and smoke resistant assemblies, whether indicated on drawings or not, and other openings indicated.

1.02 RELATED REQUIREMENTS

- A. Section 09 2116 - Gypsum Board Assemblies: Gypsum wallboard fireproofing.

1.03 REFERENCE STANDARDS

- A. ASTM E119 - Standard Test Methods for Fire Tests of Building Construction and Materials; 2015.
- B. ASTM E814 - Standard Test Method for Fire Tests of Penetration Firestop Systems; 2013a.
- C. ASTM E1966 - Standard Test Method for Fire Resistive Joint Systems; 2007 (Reapproved 2011).
- D. ASTM E2174 - Standard Practice for On-Site Inspection of Installed Firestops; 2014b.
- E. ASTM E2393 - Standard Practice for On-Site Inspection of Installed Fire Resistive Joint Systems and Perimeter Fire Barriers; 2010a (Reapproved 2015).
- F. ASTM G21 - Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi; 2015.
- G. ITS (DIR) - Directory of Listed Products; current edition.
- H. FM 4991 - Approval Standard for Firestop Contractors; 2013.
- I. FM (AG) - FM Approval Guide; current edition.
- J. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168; current edition.
- K. UL 1479 - Standard for Fire Tests of Penetration Firestops; Current Edition, Including All Revisions.
- L. UL 2079 - Standard for Tests for Fire Resistance of Building Joint Systems; Current Edition, Including All Revisions.
- M. UL (FRD) - Fire Resistance Directory; current edition.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Schedule of Firestopping: List each type of penetration, fire rating of the penetrated assembly, and firestopping test or design number.
- C. Product Data: Provide data on product characteristics, performance ratings, and limitations.
- D. Sustainable Design Submittal: Submit VOC content documentation for all non-preformed materials.
- E. Manufacturer's Installation Instructions: Indicate preparation and installation instructions.
- F. Installer Qualification: Submit qualification statements for installing mechanics.

1.05 QUALITY ASSURANCE

- A. Fire Testing: Provide firestopping assemblies of designs that provide the scheduled fire ratings when tested in accordance with methods indicated.
 - 1. Submission of actual test reports is required for assemblies for which none of the above substantiation exists.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

- C. Installer Qualifications: Company specializing in performing the work of this section and:
 - 1. Approved by Factory Mutual Research Corporation under FM 4991, or meeting any two of the following requirements:
 - a. Verification of minimum three years documented experience installing work of this type.
 - b. Verification of at least five satisfactorily completed projects of comparable size and type.
 - c. Licensed by local authorities having jurisdiction (AHJ).

1.06 MOCK-UP

- A. Install one firestopping assembly representative of each fire rating design required on project.
 - 1. Where one design may be used for different penetrating items or in different wall constructions, install one assembly for each different combination.
- B. If accepted, mock-up will represent minimum standard for the Work.
- C. If accepted, mock-up may remain as part of the Work. Remove and replace mock-ups not accepted.

1.07 FIELD CONDITIONS

- A. Comply with firestopping manufacturer's recommendations for temperature and conditions during and after installation; maintain minimum temperature before, during, and for three days after installation of materials.
- B. Provide ventilation in areas where solvent-cured materials are being installed.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Firestopping Manufacturers:
 - 1. 3M Fire Protection Products; -: www.3m.com/firestop/#sle.
 - 2. A/D Fire Protection Systems Inc; -: www.adfire.com/#sle.
 - 3. Hilti, Inc; -: www.us.hilti.com/#sle.
 - 4. Nelson FireStop Products; -: www.nelsonfirestop.com/#sle.
 - 5. Specified Technologies Inc; -: www.stifirestop.com/#sle.
 - 6. Tremco Commercial Sealants & Waterproofing; TREMstop Acrylic: www.tremcosealants.com/#sle.
 - 7. Substitutions: See Section 01 6000 - Product Requirements.

2.02 MATERIALS

- A. Firestopping Materials: Any materials meeting requirements.
- B. Volatile Organic Compound (VOC) Content: Provide products having VOC content lower than that required by SCAQMD 1168.
- C. Mold and Mildew Resistance: Provide firestopping materials with mold and mildew resistance rating of zero(0) in accordance with ASTM G21.
- D. Primers, Sleeves, Forms, Insulation, Packing, Stuffing, and Accessories: Provide type of materials as required for tested firestopping assembly.

2.03 FIRESTOPPING ASSEMBLY REQUIREMENTS

- A. Floor-to-Floor, Wall-to-Wall, and Wall-to-Floor Joints, Except Perimeter, Where Both Are Fire-Rated: Use system that has been tested according to ASTM E1966 or UL 2079 to have fire resistance F Rating equal to required fire rating of the assembly in which the joint occurs.
- B. Through Penetration Firestopping: Use system that has been tested according to ASTM E814 to have fire resistance F Rating equal to required fire rating of penetrated assembly.

2.04 FIRESTOPPING FOR FLOOR-TO-FLOOR, WALL-TO-FLOOR, AND WALL-TO-WALL JOINTS

- A. Concrete and Concrete Masonry Walls and Floors:
 - 1. Floor to Floor Joints:

- a. 2 Hour Construction: UL System FF-D-1013; Hilti CFS-SP WB Firestop Joint Spray and CP 672.
 - b. 2 Hour Construction: UL System FF-D-1085; Tremco, TREMstop Acrylic Firestop Sealant.
- B. Gypsum Board Walls:
- 1. Wall to Wall Joints That Have Not Been Tested For Movement Capabilities (Static):
 - a. 2 Hour Construction: UL System WW-S-0063; Specified Technologies Inc. SpeedFlex TTG Track Top Gasket.
 - 2. Wall to Wall Joints That Have Movement Capabilities (Dynamic):
 - a. 2 Hour Construction: UL System WW-D-0180; Specified Technologies Inc. SpeedFlex TTG Track Top Gasket.

2.05 FIRESTOPPING FOR FLOOR-TO-WALL JOINTS

- A. Floor-To-Wall Joint System That Have Movement Capabilities (Dynamic):
- 1. 2 Hour Construction: UL System FW-D-1069; Tremco, TREMstop Acrylic Firestop Sealant.

2.06 FIRESTOPPING PENETRATIONS THROUGH CONCRETE AND CONCRETE MASONRY CONSTRUCTION

- A. Blank Openings:
- 1. In Floors or Walls:
 - a. 2 Hour Construction: UL System C-AJ-0090; Hilti FS-ONE MAX Intumescent Firestop Sealant.
- B. Penetrations Through Floors or Walls By:
- 1. Multiple Penetrations in Large Openings:
 - a. 2 Hour Construction: UL System C-AJ-8143; Hilti FS-ONE MAX Intumescent Firestop Sealant.
 - 2. Cable Trays with Electrical Cables:
 - a. 2 Hour Construction: UL System C-AJ-4094; Hilti CFS-BL Firestop Block.
 - 3. Insulated Pipes:
 - a. 2 Hour Construction: UL System C-AJ-5048; Hilti FS-ONE MAX Intumescent Firestop Sealant, CP 606 Flexible Firestop Sealant, CP 601S Elastomeric Firestop Sealant, CP 604 Self-Leveling Firestop Sealant or CFS-S SIL GG Firestop Silicone Sealant Gun-Grade.
- C. Penetrations Through Walls By:
- 1. Uninsulated Metallic Pipe, Conduit, and Tubing:
 - a. 2 Hour Construction: UL System W-J-1067; Hilti FS-ONE MAX Intumescent Firestop Sealant.
 - 2. Electrical Cables Not In Conduit:
 - a. 2 Hour Construction: UL System C-AJ-3095; Hilti FS-ONE MAX Intumescent Firestop Sealant.
 - 3. Insulated Pipes:
 - a. 2 Hour Construction: UL System C-AJ-5090; Hilti FS-ONE MAX Intumescent Firestop Sealant.
 - 4. HVAC Ducts, Uninsulated:
 - a. 2 Hour Construction: UL System W-J-7092; Specified Technologies Inc. FyreFlange HVAC Firestop Angle.
 - 5. HVAC Ducts, Insulated:
 - a. 2 Hour Construction: UL System W-J-7112; Hilti FS-ONE MAX Intumescent Firestop Sealant.

2.07 FIRESTOPPING PENETRATIONS THROUGH GYPSUM BOARD WALLS

- A. Blank Openings:
- 1. 2 Hour Construction: UL System W-L-0020; Specified Technologies Inc. Composite Sheet.

- B. Penetrations By:
1. Multiple Penetrations in Large Openings:
 - a. 2 Hour Construction: UL System W-L-1408; Hilti FS-ONE MAX Intumescent Firestop Sealant.
 2. Uninsulated Metallic Pipe, Conduit, and Tubing:
 - a. 2 Hour Construction: UL System W-L-1033; Specified Technologies Inc. SIL silicone sealant.
 3. Uninsulated Non-Metallic Pipe, Conduit, and Tubing:
 - a. 2 Hour Construction: UL System W-L-2048; Specified Technologies Inc. SSW wrap strips.
 4. Electrical Cables Not In Conduit:
 - a. 2 Hour Construction: UL System W-L-3024; Specified Technologies Inc. SSP Firestop Putty.
 5. Cable Trays with Electrical Cables:
 - a. 2 Hour Construction: UL System W-L-4008; Specified Technologies Inc. SSB Intumescent Firestop pillows.
 6. Insulated Pipes:
 - a. 2 Hour Construction: UL System W-L-5014; Specified Technologies Inc. SSS Intumescent Firestop Sealant.
 7. HVAC Ducts, Insulated:
 - a. 2 Hour Construction: UL System W-L-7156; Hilti FS-ONE MAX Intumescent Firestop Sealant.

2.08 FIRESTOPPING SYSTEMS

- A. Firestopping: Any material meeting requirements.
1. Fire Ratings: Use system that is listed by FM (AG), ITS (DIR), or UL (FRD) and tested in accordance with ASTM E814, ASTM E119, or UL 1479 with F Rating equal to fire rating of penetrated assembly and minimum T Rating Equal to F Rating and in compliance with other specified requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify openings are ready to receive the work of this section.

3.02 PREPARATION

- A. Clean substrate surfaces of dirt, dust, grease, oil, loose material, or other materials that could adversely affect bond of firestopping material.
- B. Remove incompatible materials that could adversely affect bond.

3.03 INSTALLATION

- A. Install materials in manner described in fire test report and in accordance with manufacturer's instructions, completely closing openings.
- B. Do not cover installed firestopping until inspected by Oregon State University's Independent Testing Agency.
- C. Do not cover installed firestopping until inspected by authorities having jurisdiction.
- D. Install labeling required by code.

3.04 FIELD QUALITY CONTROL

- A. Independent Testing Agency: Inspection agency employed and paid by Oregon State University, will examine penetration firestopping in accordance with ASTM E2174, and ASTM E2393.
- B. Repair or replace penetration firestopping and joints at locations where inspection results indicate firestopping or joints do not meet specified requirements.

3.05 CLEANING

- A. Clean adjacent surfaces of firestopping materials.

3.06 PROTECTION

- A. Protect adjacent surfaces from damage by material installation.

END OF SECTION

SECTION 07 9005
JOINT SEALERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Sealants and joint backing.

1.02 RELATED REQUIREMENTS

- A. Section 07 2500 - Weather Barriers: Sealants required in conjunction with air barriers and vapor retarders.
- B. Section 08 8000 - Glazing: Glazing sealants and accessories.
- C. Section 09 2116 - Gypsum Board Assemblies: Acoustic sealant.

1.03 REFERENCE STANDARDS

- A. ASTM C834 - Standard Specification for Latex Sealants; 2014.
- B. ASTM C919 - Standard Practice for Use of Sealants in Acoustical Applications; 2012.
- C. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2014.
- D. ASTM C1193 - Standard Guide for Use of Joint Sealants; 2013.

1.04 SUBMITTALS

- A. See Section 01 33 23 - Shop drawings, product data, samples
- B. Manufacturer's Installation Instructions: Indicate special procedures.

1.05 QUALITY ASSURANCE

- A. Maintain one copy of each referenced document covering installation requirements on site.

1.06 FIELD CONDITIONS

- A. Maintain temperature and humidity recommended by the sealant manufacturer during and after installation.

1.07 WARRANTY

- A. Correct defective work within a two year period after Date of Substantial Completion.
- B. Warranty: Include coverage for installed sealants and accessories which fail to achieve airtight seal, exhibit loss of adhesion or cohesion, or do not cure.

PART 2 PRODUCTS

2.01 SEALANTS

- A. Sealants and Primers - General: Provide products having volatile organic compound (VOC) content as specified.
- B. General Purpose Exterior Sealant: Polyurethane; ASTM C920, Grade NS, Class 25 minimum; Uses M, G, and A; single component.
 - 1. Color: To be selected by Waterleaf Architecture from manufacturer's standard range.
- C. General Purpose Interior Sealant: Acrylic emulsion latex; ASTM C834, Type OP, Grade NF single component, paintable.
 - 1. Color: To be selected by Waterleaf Architecture from manufacturer's standard range.

2.02 ACCESSORIES

- A. Primer: Non-staining type, recommended by sealant manufacturer to suit application.
- B. Joint Cleaner: Non-corrosive and non-staining type, recommended by sealant manufacturer; compatible with joint forming materials.
- C. Joint Backing: Round foam rod compatible with sealant; ASTM D1667, closed cell PVC; oversized 30 to 50 percent larger than joint width.

- D. Bond Breaker: Pressure sensitive tape recommended by sealant manufacturer to suit application.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate surfaces are ready to receive work.
- B. Verify that joint backing and release tapes are compatible with sealant.

3.02 PREPARATION

- A. Remove loose materials and foreign matter that could impair adhesion of sealant.
- B. Clean and prime joints in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.
- D. Protect elements surrounding the work of this section from damage or disfigurement.

3.03 INSTALLATION

- A. Perform work in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.
- B. Perform installation in accordance with ASTM C1193.
- C. Install bond breaker where joint backing is not used.
- D. Install sealant free of air pockets, foreign embedded matter, ridges, and sags.
- E. Apply sealant within recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.
- F. Tool joints concave.

3.04 CLEANING

- A. Clean adjacent soiled surfaces.

3.05 PROTECTION

- A. Protect sealants until cured.

END OF SECTION

SECTION 07 9200
JOINT SEALANTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Nonsag gunnable joint sealants.
- B. Oregon State University-provided field quality control.

1.02 REFERENCE STANDARDS

- A. ASTM C794 - Standard Test Method for Adhesion-In-Peel of Elastomeric Joint Sealants; 2015a.
- B. ASTM C834 - Standard Specification for Latex Sealants; 2014.
- C. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2014.
- D. ASTM C1087 - Standard Test Method for Determining Compatibility of Liquid-Applied Sealants with Accessories Used in Structural Glazing Systems; 2016.
- E. ASTM C1193 - Standard Guide for Use of Joint Sealants; 2013.
- F. ASTM C1248 - Standard Test Method for Staining of Porous Substrate by Joint Sealants; 2008 (Reapproved 2012).
- G. SCAQMD 1168 - South Coast Air Quality Management District Rule No.1168; current edition.

1.03 SUBMITTALS

- A. See Section 01 33 23 for submittal procedures
- B. Samples for Verification: Where custom sealant color is specified, obtain directions from Waterleaf Architecture and submit at least two physical samples for verification of color of each required sealant.
- C. Preconstruction Laboratory Test Reports: Submit at least four weeks prior to start of installation.

1.04 QUALITY ASSURANCE

- A. Preconstruction Laboratory Testing: Arrange for sealant manufacturer(s) to test each combination of sealant, substrate, backing, and accessories.
 - 1. Adhesion Testing: In accordance with ASTM C794.
 - 2. Compatibility Testing: In accordance with ASTM C1087.
 - 3. Allow sufficient time for testing to avoid delaying the work.
 - 4. Deliver to manufacturer sufficient samples for testing.
 - 5. Report manufacturer's recommended corrective measures, if any, including primers or techniques not indicated in product data submittals.
 - 6. Testing is not required if sealant manufacturer provides data showing previous testing, not older than 24 months, that shows satisfactory adhesion, lack of staining, and compatibility.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Non-Sag Sealants: Permits application in joints on vertical surfaces without sagging or slumping.
- B. Self-Leveling Sealants: Pourable or self-leveling sealant that has sufficient flow to form a smooth, level surface when applied in a horizontal joint.

2.02 JOINT SEALANT APPLICATIONS

- A. Scope:
 - 1. Exterior Joints: Seal open joints, whether or not the joint is indicated on drawings, unless specifically indicated not to be sealed. Exterior joints to be sealed include, but are not limited to, the following items.
 - a. Wall expansion and control joints.
 - b. Joints between door, window, and other frames and adjacent construction.

- c. Joints between different exposed materials.
- d. Openings below ledge angles in masonry.
- e. Other joints indicated below.
- 2. Interior Joints: Do not seal interior joints unless specifically indicated to be sealed. Interior joints to be sealed include, but are not limited to, the following items.
 - a. Joints between door, window, and other frames and adjacent construction.
 - b. Other joints indicated below.
- 3. Do not seal the following types of joints.
 - a. Intentional weepholes in masonry.
 - b. Joints indicated to be treated with manufactured expansion joint cover or some other type of sealing device.
 - c. Joints where sealant is specified to be provided by manufacturer of product to be sealed.
 - d. Joints where installation of sealant is specified in another section.
 - e. Joints between suspended panel ceilings/grid and walls.
- B. Exterior Joints: Use non-sag non-staining silicone sealant, unless otherwise indicated.
- C. Interior Joints: Use non-sag polyurethane sealant, unless otherwise indicated.
 - 1. Type ___ - Wall and Ceiling Joints in Non-Wet Areas: Acrylic emulsion latex sealant.

2.03 JOINT SEALANTS - GENERAL

- A. Sealants and Primers: Provide products having lower volatile organic compound (VOC) content than indicated in SCAQMD 1168.
- B. Colors: As selected by Architect.

2.04 NONSAG JOINT SEALANTS

- A. Non-Staining Silicone Sealant: ASTM C920, Grade NS, Uses M and A; not expected to withstand continuous water immersion or traffic.
 - 1. Movement Capability: Plus and minus 25 percent, minimum.
 - 2. Non-Staining To Porous Stone: Non-staining to light-colored natural stone when tested in accordance with ASTM C1248.
 - 3. Dirt Pick-Up: Reduced dirt pick-up compared to other silicone sealants.
- B. Polyurethane Sealant: ASTM C920, Grade NS, Uses M and A; single or multi-component; not expected to withstand continuous water immersion or traffic.
 - 1. Movement Capability: Plus and minus 12.5 percent, minimum.
- C. Acrylic Emulsion Latex: Water-based; ASTM C834, single component, non-staining, non-bleeding, non-sagging; not intended for exterior use.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that joints are ready to receive work.
- B. Verify that backing materials are compatible with sealants.

3.02 PREPARATION

- A. Remove loose materials and foreign matter that could impair adhesion of sealant.
- B. Clean joints, and prime as necessary, in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.
- D. Mask elements and surfaces adjacent to joints from damage and disfigurement due to sealant work; be aware that sealant drips and smears may not be completely removable.

3.03 INSTALLATION

- A. Perform work in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.
- B. Perform installation in accordance with ASTM C1193.

- C. Install bond breaker backing tape where backer rod cannot be used.
- D. Install sealant free of air pockets, foreign embedded matter, ridges, and sags, and without getting sealant on adjacent surfaces.
- E. Do not install sealant when ambient temperature is outside manufacturer's recommended temperature range, or will be outside that range during the entire curing period, unless manufacturer's approval is obtained and instructions are followed.
- F. Nonsag Sealants: Tool surface concave, unless otherwise indicated; remove masking tape immediately after tooling sealant surface.

END OF SECTION

SECTION 08 3613
SECTIONAL DOORS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Overhead sectional doors, power operated.
- B. Operating hardware and supports.

1.02 RELATED REQUIREMENTS

- A. Section 07 9200 - Joint Sealants: Sealing joints between frames and adjacent construction.

1.03 REFERENCE STANDARDS

- A. 16 CFR 1201 - Safety Standard for Architectural Glazing Materials; current edition.
- B. ANSI Z97.1 - American National Standard for Safety Glazing Materials Used in Buildings, Safety Performance Specifications and Methods of Test; 2010.
- C. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2015.
- D. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate; 2014.
- E. ASTM C1172 - Standard Specification for Laminated Architectural Flat Glass; 2014.
- F. ASTM E283 - Standard Test Method for Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen; 2004 (Reapproved 2012).
- G. ASTM E330/E330M - Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference; 2014.
- H. DASMA 102 - American National Standard Specifications for Sectional Overhead Type Doors; 2011.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate opening dimensions and required tolerances, connection details, anchorage spacing, hardware locations, and installation details.
- C. Product Data: Show component construction, anchorage method, and hardware.
- D. Samples: Submit two panel finish samples, 12 by 12 inch in size, illustrating color and finish.
- E. Manufacturer's Installation Instructions: Include any special procedures required by project conditions.
- F. Manufacturer's Qualification Statement.
- G. Installer's Qualification Statement.
- H. Operation Data: Include normal operation, troubleshooting, and adjusting.
- I. Maintenance Data: Include data for motor and transmission, shaft and gearing, lubrication frequency, spare part sources.
- J. Warranty: Submit manufacturer warranty and ensure forms have been completed in Owner's name and registered with manufacturer.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of type specified and with at least three years documented experience and approved by manufacturer.
- C. Comply with applicable code for motor and motor control requirements.

1.06 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for warranty requirements.
- B. Correct defective Work within a five year period after Date of Substantial Completion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Basis of Design: Sectional Overhead Door, Extruded Aluminum manufactured by Northwest Door, LLC.
- B. Other Acceptable Manufacturers -
 - 1. Substitutions: See Section 01 6000 - Product Requirements.

2.02 ALUMINUM DOORS

- A. Manufacturer: Northwest Door, LLC
- B. Model: 800, 500 mm (2") Thick, 6063-T5 Extruded Aluminum Frame
- C. Type: Standard Lift
- D. Aluminum Doors: Flush aluminum, insulated; standard lift operating style with track and hardware; complying with DASMA 102, Commercial application.
 - 1. Performance: Withstand positive and negative wind loads equal to 1.5 times design wind loads specified by local code without damage or permanent set, when tested in accordance with ASTM E330/E330M, using 10 second duration of maximum load.
 - 2. Door Nominal Thickness: 2 inches thick.
 - 3. Thermal Transmittance: U-factor of 0.31 Btu/hr sq ft degrees F, maximum, in accordance with DASMA 102.
 - 4. Air Leakage Rate: Less than 0.40 cfm/sf when tested in accordance with ASTM E283 at test pressure difference of 1.57 psf.
 - 5. Finish: Factory finished with acrylic baked enamel; To Match Existing color.
 - 6. Glazed Lights: Full panel width, See Drawings for Configuration row; set in place with resilient glazing channel.
 - 7. Power operated: Professional grade, Liftmaster openers, jack shaft, hoist or trolley as required.
- E. Glazing: Annealed float glass; single pane: clear: 1/8 inch overall thickness.

2.03 COMPONENTS

- A. Track: Rolled galvanized steel, 0.090 inch minimum thickness; 3 inch wide, continuous one piece per side; galvanized steel mounting brackets 1/4 inch thick.
- B. Lift Mechanism: Torsion spring on cross head shaft, with braided galvanized steel lifting cables.
 - 1. For Manual Operation: Requiring maximum exertion of 25 lbs force to open.
- C. Sill Weatherstripping: Resilient hollow rubber strip, one piece; fitted to bottom of door panel, full length contact.
- D. Jamb Weatherstripping: Roll formed steel section full height of jamb, fitted with resilient weatherstripping, placed in moderate contact with door panels.
- E. Head Weatherstripping: EPDM rubber seal, one piece full length.
- F. Panel Joint Weatherstripping: Neoprene foam seal, one piece full length.
- G. Lock: Inside center mounted, adjustable keeper, spring activated latch bar with feature to retain in locked or retracted position; interior and exterior handle.

2.04 MATERIALS

- A. Sheet Steel: Hot-dipped galvanized steel sheet, ASTM A653/A653M, with G60/Z180 coating, plain surface.
- B. Laminated Safety Glass: ASTM C1172 with at least 0.030 inch thick polyvinyl butyral (PVB) interlayer, and in compliance with safety criteria 16 CFR 1201 Categories 1 and 2, and ANSI Z97.1.

- C. Insulation: Foamed-in-place polyurethane, bonded to facing.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that wall openings are ready to receive work and opening dimensions and tolerances are within specified limits.

3.02 PREPARATION

- A. Prepare opening to permit correct installation of door unit to perimeter air and vapor barrier seal.
- B. Apply primer to wood frame.

3.03 INSTALLATION

- A. Install door unit assembly in accordance with manufacturer's instructions.
- B. Anchor assembly to wall construction and building framing without distortion or stress.
- C. Securely brace door tracks suspended from structure. Secure tracks to structural members only.
- D. Fit and align door assembly including hardware.

3.04 TOLERANCES

- A. Maximum Variation from Plumb: 1/16 inch.
- B. Maximum Variation from Level: 1/16 inch.
- C. Longitudinal or Diagonal Warp: Plus or minus 1/8 inch from 10 ft straight edge.
- D. Maintain dimensional tolerances and alignment with adjacent work.

3.05 ADJUSTING

- A. Adjust door assembly for smooth operation and full contact with weatherstripping.

3.06 CLEANING

- A. Clean doors and frames and glazing.
- B. Remove temporary labels and visible markings.

3.07 PROTECTION

- A. Protect installed products from damage until Date of Substantial Completion.
- B. Do not permit construction traffic through overhead door openings after adjustment and cleaning.

END OF SECTION

SECTION 08 51 13

ALUMINUM WINDOWS

PART 1 - GENERAL

1.1 SUMMARY

- A. The Conditions of the Contract, and all Sections of Division 1, are hereby made a part of this Section.
- B. Section Includes: Factory glazed windows complete with reinforcing, shims, anchors, and attachment devices.
- C. Related Sections:
 - 1. Division 07 Section: Thermal and Moisture Protection
 - 2. Division 08 Section: Openings
- D. Coordinate work with that of all construction contractors affecting or affected by work of this Contract. Cooperate with such contractors to assure the steady progress of the Work.
- E. Conduct field testing of windows when specified in Division 1 by an independent lab using AAMA field test procedures.

1.2 SYSTEM DESCRIPTION

- A. General: In addition to requirements shown or specified comply with site lines and profiles indicated on contract documents.
- B. Window Replacement Requirements:
 - 1. Work Included: Provide labor, materials and equipment necessary to complete the work of the Replacement Window Contract, and without limiting the generality there of include:
 - a. Removal of existing sash, fixed glazing, frames and other accessories as required by the proposed replacement system.
 - b. Removal of other existing work as required for the proper installation and operation of the new units.
 - c. Removal from site and legal disposal of all removed materials, debris, packaging, banding and all other surplus materials and equipment.
 - d. Provide new factory glazed, thermally broken, aluminum windows, types as specified herein, together with necessary mullions, panning, trim, expanders, operating hardware, installation hardware and all other accessories as required.
 - e. Insulated panels and frames as required in selected transoms and other locations.
 - f. Treated wood blocking, fillers and nailers as required for secure installation. Bidders shall survey conditions of existing sills and jambs prior to bidding. Contractor shall be responsible for providing new blocking for portions of same that are deteriorated.
 - g. Fiberglass insulation between window frames and adjacent construction where applicable.
 - h. Sealing of all joints within each window assembly.
 - i. Sealing of entire exterior perimeter of window units after installation.
 - j. Field observations and measurements of existing openings and conditions.
 - k. Furnishing and delivering of extra materials as specified.

B. Design Requirements:

1. Manufacturer/subcontractor is responsible for designing system, including installation instructions and necessary modifications to meet specified requirements and maintain visual design concepts.
2. Requirements shown by details are intended specifically to establish dimension of unit, sight lines and profiles of members.
3. Provide assemblies free from rattles, wind whistles and noise due to thermal and structural movement and wind pressure.
4. Installation instructions are to take into account specified site peculiarities and expansion and contraction movements so there is no possibility of loosening, weakening or fracturing connection between units and building structure or between units themselves.
5. Provide for expansion and contraction due to structural movement without detriment to appearance or performance.
6. Evacuate water without infiltration to interior from exterior face of wall, water entering joints, and condensation occurring within windows, by drain holes and gutters of adequate size or other acceptable method.
7. Provide concealed fastening wherever possible.

C. Performance Requirements: Requirements for aluminum windows, terminology and standards of performance, and fabrication and workmanship are those specified and recommended in AAMA/WDMA/CSA 101/I.S.2/A440-08 and applicable general recommendations published by AAMA. Conform to more stringent of specified AAMA standards and following:

1. Air Infiltration Test: Not exceed 0.3 cubic feet per minute per foot of crack length when tested at a pressure of 6.24 psf. Perform tests in accordance with ASTM E 283 with the sash in a closed and locked position.
2. Water Resistance Test: Subject window unit to a water resistance test in accordance with ASTM E 331 and E547 with no water passing the interior face of the window frame and no leakage as defined in the test method. Mount the glazed unit in its vertical position continuously supported around the perimeter and the sash placed in the fully closed and locked position. When a static pressure of 8 pounds per square foot has been stabilized, apply five gallons of water per square foot of window area to the exterior face of the unit for a period of 15 minutes.
3. Uniform Load Deflection Test: ASTM E 330 at 40 pounds per square foot: No member deflection more than 1/175 of its span. Maintain test load for a period of 10 seconds resulting in no glass breakage, permanent damage of fasteners, hardware parts, support arms, actuating mechanisms or any other damage causing the window to be inoperable.
4. Uniform Load Structural Test: Apply a minimum exterior and interior uniform load of 60 pounds per square foot to the entire outside surface of the test unit. Maintain this test load for a period of 10 seconds. Results: No glass breakage, permanent damage of fasteners, hardware parts, support arms, actuating mechanisms, or any other damage causing the window to be inoperable. And no permanent deformation of any frame or vent member in excess of 0.2 percent of its span.
5. Life Cycle Test: Per AAMA 101 and AAMA 910, provide proof that the product meets the criteria including passing air and water tests at the conclusion of the cycle tests.
6. "U" Value Tests: (Co-efficient of Heat Transfer): Thermal Transmittance of Conduction with a 15 mph perpendicular dynamic wind: 0.53 BTU/hr/ft²/F at vents and 0.32 BTU/hr/ft²/F at fixed area when tested with specified clear-Low E insulating glass or the glazing to be supplied..
7. Testing: Where manufacturer's standard window units comply with the above performance requirements and have been tested by an AAMA certified independent laboratory showing compliance with such tests. Submit copy of the test report for both the operable vent and the fixed windows signed by the independent laboratory and less than 4 years old.

1.2 SUBMITTALS

- A. Product Data: Submit manufacturer's specifications, recommendations and standard details for aluminum window units.
- B. Shop Drawings: Submit shop drawings, including location floor plans or exterior wall elevations showing all window openings, typical unit elevations at 1/4 inch scale, and half size detail sections of every typical composite member. Show anchors, hardware, operators and other components as appropriate if not included in manufacturer's standard data. Include glazing details and standards for factory glazed units.
- C. Samples:
1. Submit one sample of each required aluminum finish, on 3 x 3 inch long sections of extrusion shapes or aluminum sheets as required for window units.
 2. Submit additional samples, if and as directed by Architect, to show fabrication techniques, workmanship of component parts, and design of hardware and other exposed auxiliary items.
- D. Certifications: Submit certified test laboratory reports by independent laboratory substantiating performance of system. Include other supportive data as required or as necessary.

1.3 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Store and handle windows, mullions, panels, hardware and all pertinent items in strict compliance with the manufacturer's instructions.
- B. Protect units adequately against damage from the elements, construction activities and other hazards before, during and after installation.

1.4 WARRANTY

- A. Manufacturer's Warrantees: Submit written warrantees from window manufacturer for the following:
1. Windows: Windows furnished are certified as fully warranted against any defects in material or workmanship under normal use and service for a period of one (1) year from date of fabrication.
 2. Finish: The pigmented organic finishes on exposed surfaces of windows and component parts (such as panning, trim, mullions and the like) are certified as complying fully with requirements of AAMA 2604 for pigmented organic coating and fully warranted against chipping, peeling, cracking or blistering and fading for a period of ten (10) years from date of installation.
 3. Insulated Glass: Warranted from visual obstruction due to internal moisture for a period of twenty (20) years.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Basis of Design: Series SR6700 Projected window as manufactured by Graham Architectural Products, York, PA., utilizing profiles as indicated on bid documents. Locally Represented by: Looking Glass AP, Salem Oregon 503-683-2404 peter@lookingglassap.com
- B. Thermal Barrier: Provides a continuous uninterrupted thermal barrier around the entire perimeter of the frame and all sash and not be bridged by any metal conductors at any point. Provide manufacturer's standard construction which has been in use on similar window units for a period

of not less than three years, has been tested to demonstrate resistance to thermal conductance and condensation and has been tested to show adequate strength per AAMA 505.

C. Pre-Bid Qualifications:

1. All bids must be based on pre-qualified products. To qualify, the bidder must furnish one complete typical project size window unit 10 days prior to the time set for bids. Accompanying the sample will be certified test reports from an accredited AAMA Laboratory verifying that the performance of the product meets or exceeds the criteria listed in section 1.2.E .
2. This sample must be a true and accurate representation of the window the bid is based on with the finish being the only exception. No verbal approvals will be given. Each submitter will be notified in writing of acceptance or rejection.
3. The manufacturer must verify that it has been engaged in the manufacturing of the product in their production facility for a period of five (5) years.
4. Maintenance manuals accompany the product sample being submitted for approval.
5. Sight lines to match the base product specified and the project bid documents..
6. The qualified bidder must verify that the bidder has been involved with the installation of this type of product in a minimum of 5 projects of similar scope and quality.

2.2 MATERIALS

A. Aluminum Extrusions: Alloy and temper recommended by window manufacturer for strength, corrosion resistance and application of required finish, but not less than 22,000 psi ultimate tensile strength, a yield of 16,000 psi. Comply with ASTM B 221.

B. Fasteners: Aluminum, stainless steel, or other materials warranted by manufacturer to be non-corrosive and compatible with aluminum window members, trim, hardware, anchors and other components of window units.

1. Do not use exposed fasteners on exterior except where unavoidable for application of hardware. Match finish of adjoining metal.
2. Provide non-magnetic stainless steel, tamper-proof screws for exposed fasteners, where required, or special tamper-proof fasteners.
3. Locate fasteners so as not to disturb the thermal barrier construction of windows.

C. Anchors, Clips And Window Accessories: Depending on strength and corrosion-inhibiting requirements, fabricate units of aluminum, non-magnetic stainless steel or hot-dip zinc coated steel or iron complying with ASTM A 123.

D. Compression Glazing Strips and Weatherstripping: At manufacturer's option, provide neoprene gaskets complying with ASTM D 2000 Designation 2BC415 to 3BC415, PVC gaskets complying with ASTM D2287, or expanded neoprene gaskets complying with ASTM C 509, Grade 4.

E. Sealant:

1. Unless otherwise indicated for sealants required within fabricated window units, provide elastomeric type as recommended by window manufacturer for joint size and movement, to remain permanently elastic, non-shrinking and non-migrating. Provide product complying with AAMA Specification 803 and 808.
2. Refer to Division 7 for perimeter sealants between window units and surrounding construction.

F. Insect Screens: (if required):

1. Fabric: 18 x 16 [aluminum charcoal] [fiberglass] [.009 stainless steel] mesh retained in screen frames with vinyl splines that permit easy replacement.
2. Frames: Extruded aluminum sections or steel frames with corners mitered and crimped with corner gussets. Manufacturer's standard finish.

2.3 WINDOW TYPES (OPERATION)

A. Project Out Aluminum Windows (AP):

1. Frame Depth: Minimum 3.250 inches.
2. Vent Depth: Minimum 2.250 inches.
3. Wall Thickness: Nominal 0.125 frame and vent.

B. Fixed Aluminum Windows or Panel Frames (F):

1. No special hardware required.
2. Minimum Wall Thickness: 0.125 inches.
3. Minimum Frame Depth: 3.250 inches.

C. Accomplish combinations of operable and fixed units by providing continuous jamb construction. Splicing is not permitted along entire length of the jamb. Vertical and horizontal sight lines at all fixed glazed areas to operable vents shall not exceed 2.062 inches. True muntins supporting vent shall be 1.125" in sightline at fixed areas.

2.4 FABRICATION AND ACCESSORIES

A. General: Provide manufacturer's standard fabrication and accessories which comply with specifications. Include complete system for assembly of components and anchorage of window units and provide complete pre-glazing at the factory.

B. Window Material:

1. Windows and Muntin Bars: Aluminum.
2. Secondary Members (friction tabs, shoes, weatherstripping guides, etc.): Aluminum or a material compatible with aluminum.
3. Main Frame and Vent: Nominal thickness of not less than 0.125 inches, except for fin trim either integral or applied. The vent shall overlap muntin frame and perimeter frame.
4. Vent Members: Not less than 2.250 inches in depth.

C. Master Frame: Not less than 3.250 inches in depth.

D. Hardware:

1. Material: Aluminum, stainless steel or other non-corrosive materials compatible with aluminum for hardware having component parts which are exposed. Cadmium or zinc-plated steel where used must be in accordance with ASTM Specification B 766 or B 633.
2. Primary Locking Devices: Cast cam action locks. When casement vent height exceeds thirty inches, two such locking devices will be required.
 - a. Provide cast bronze cam action locks.

E. Ventilators:

1. Balance projected ventilators on two heavy-duty 300 series stainless steel 4 bar hinge assemblies. Hinges shall have symmetrical stainless steel end cap with controlled cam action of the vent. Provide brass slides with dual set screws for precision adjustment.
2. Limit Hardware:
 - a. Use manufacturers standard hardware (Anderburg FA225) for opening restrictions.
 - b. On top hinged units, use limit operating stay arms (Anderburg 88SS).
 - c. Limit opening to [12] inches.

F. Thermal Barrier: Provides a continuous uninterrupted thermal barrier around the entire perimeter of the frame and all sash and shall not be bridged by any metal conductors at any point.

G. Construction:

1. Assembly: Miter and seal vents with a non-hardening mastic, forming a watertight joint. Structurally reinforce corners of the vent with aluminum gusset blocks and chemically weld, followed by crimping. Mechanical fasteners are not allowed.
2. Cope corners of the frame with two screws per corner into screw ports and back seal, forming a water-tight joint.

H. Mullions - Other structural members: When mullion units occur, whether they are joined by integral mullions, independent mullions or by a combination of frame members, the resulting members must be capable of withstanding the load outlined under Uniform Load specified load requirements, without deflecting more than 1/175th of its span. When independent or integral mullions are used to join windows, the mullions shall contain a thermal barrier as specified. Sightline shall provided match to existing sightlines. Evidence of compliance may be by mathematical calculations.

I. Glazing:

1. Pre-glaze all units (except insulated panels as required for installation) at the factory with insulated glass as follows:
 - a. Typical Insulated Glass: Cardinal Low E 272 or equal. Overall thickness of 1 inch with two lites of 3/16 inch or thicker if size and loading require with a Low E coating on the #2 surface.
 - (1) Primary Sealant: Polyisobutylene applied to the edge of the spacer.
 - (2) Secondary Sealant: Silicone.
 - (3) Air Spacer: Continuous metal spacer with formed corners and an in-line connector, containing desiccant. Spacer to be black.
 - (4) Performance Criteria:
 - (a) Visible Light Transmittance: 70%
 - (b) U Value: .30
 - (c) Solar Heat Gain Co-efficient: .40
2. Glaze units to allow for glass replacement without the use of special tools.
3. Insulated Panels: 1 inch total thickness with factory acrylic enamel exterior and interior smooth aluminum skins to match window frame finish. Provide tempered hardboard substrate on urethane core or other substrate as selected for the project. Install panels in accordance with manufacturer's recommendations.

J. Weather Protection:

1. Provide means of drainage for water and condensation which may accumulate in members of window units by use of two weeps per main frame member.
2. Do not position other material in such a manner as to obstruct the weep holes function.

K. Screens: Provide screens on operating vents as indicated on the architectural plans.

L. True Muntins: Separates the lights of glass. Extruded to match the window finish. Exterior profile to be 1.125 inches x 0.5 inches deep. Machine and mechanically fasten the intersections of muntins. Fasten the extrusion to the sloped perimeter vent at each contact point. Use a removable glazing bead at the interior of the muntin for glazing from the interior.

M. Simulated True Muntin: The simulated muntin is a triple muntin system to simulate a true muntin appearance from exterior. Align muntins within the windows system and from window to window within an industry acceptable tolerance.

1. Exterior Grids: Finish matching the window system. Profile to match profiles indicated on contract documents and serve as a match to the true muntins. Fasten grid to sloped perimeter vent at each contact point. Two piece snap grids are not permitted as a substitute.
 - a. Unglazed openings at Louvers shall have exterior grids with reinforcement tube extrusion added at all horizontal grids which span full width of the opening, as

indicated in drawings and as required. The tube reinforcement shall be screw attached to a perimeter frame which is set into the window glazing pocket as indicated on drawings. Reinforcement shall be removable to allow for future glazing.

2. Interior Grid: 1.125" x 0.062" aluminum bar or profile grid as applicable, finish to match window system.
3. Muntin In-between Glass: Aluminum muntin in glass simulates glass perimeter spacer between interior and exterior applied grid. Machine and mechanically fasten the intersections of muntin grids. Fasten the grid to the sloped perimeter vent at each contact point. Color: Black

2.5 CASING COVER SYSTEM: (Panning, Trims, Receptors, Mullions, Sills etc.)

A. Exterior Casing Covers (Panning, Receptors, Subsills, Sills, etc.): Provide extruded prime alloy aluminum 6063-T5 no less than nominal 0.078 inch wall thickness. Casing covers of less than 2 inches in depth from the window frame may be of 0.062 inch wall thickness.

1. Exposed screws, fasteners or pop rivets are not acceptable on the casing or mullion systems.

B. Exterior mullion covers: Extruded aluminum shape to provide rigidity, no less than nominal 0.062 inch wall thickness. Seal against the window sections with continuous bulbous vinyl weatherstrip interlocked within the mullion cover and sealant as required for a watertight installation.

C. Interior trim:

1. Interior Trim, Closures and Angles: As detailed, of extruded shapes no less than 0.062 inch nominal wall thickness or as required.
2. Snap Trim: Apply in full length without splices or with minimum splices and spans exceeding 16' and attach with clips spaced no more than 18 inches on center or as required to meet structural loading requirements. Clips shall be no less than 3 inches long. No exposed screws will be allowed on interior trim.

2.6 ALUMINUM WINDOW FINISHES

A. Finish Options:

Provide manufacturer's standard 2 coat Fluoropolymer 70% Kynar baked on, electrostatically applied enamel coating. Color to be selected from manufacturer's standard colors [custom non-exotic color] [custom exotic color] as selected by the Architect, applied over manufacturer's standard substrate preparation including cleaning, degreasing, and chromate conversion coating. Finish shall meet or exceed AAMA 2605.

1. Color: Match Existing
2. Manufacturer's Code: TBD

PART 3 - EXECUTION

3.1 PREPARATION

A. Existing Construction:

1. Do not remove existing windows until new replacements are available and ready for immediate installation. Do not leave any openings uncovered at end of working day, during wind-driven precipitation or during excessively cold weather.
2. Remove existing work carefully; avoid damage to existing work to remain.

B. Perform operations as necessary to prepare openings for proper installation and operation of new retrofit units or new construction units.

C. Verify openings are in accordance with shop drawings and Architects Drawings.

3.2 INSTALLATION

- A. Comply with manufacturer's specifications and recommendations for installation of window units, hardware, operators and other components of work. In no case shall attachment to structure or to components of the window system be through or affect the thermal barriers of the window units.
- B. Set units plumb, level and true to line, without warp or rack of frames or sash. Anchor securely in place. Separate aluminum and other corrodible surfaces from sources of corrosion or electrolytic action.
- C. Wedge fiberglass insulation between frames of new windows and construction to remain, or between frames and new receptor as applicable. Compress fiberglass to no less than 50 percent of original thickness.
- D. Set sill members and other members in bed of compound as shown, or with joint fillers or gaskets as shown, to provide weathertight construction. Seal units following installation and as required to provide weathertight system.

3.3 ADJUST AND CLEAN

- A. Adjust operating vent and hardware to provide tight fit at contact points and at weatherstripping, for smooth operation and weathertight closure.
- B. Clean aluminum surfaces promptly after installation of windows, exercising care to avoid damage to protective coatings and finishes. Remove excess glazing and sealant compounds, dirt, and other substances. Lubricate hardware and moving parts.
- C. Clean glass promptly after installation of windows. Remove glazing and sealant compound, dirt and other substances.
- D. Existing windows and other materials removed from site become property of the Contractor who shall promptly remove same and legally dispose of at no additional cost to the Owner.
- E. Comply with all applicable laws, rules and regulations.

3.4 PROTECTION

- A. Initiate all protection and other precautions required to ensure that window units will be without damage or deterioration (other than normal weathering) at time of acceptance.
- B. Send to Architect, with copy to Owner, written recommendations for maintenance and protection of windows following Substantial Completion of Window Contract.

END OF SECTION

SECTION 08 8000
GLAZING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Double-glazed solar control Insulating glass units.
- B. Glazing compounds and accessories.

1.02 RELATED REQUIREMENTS

- A. Section 07 2500 - Weather Barriers.
- B. Section 07 9200 - Joint Sealants: Sealants for other than glazing purposes.
- C. Section 08 4313 - Aluminum-Framed Storefronts: Glazing furnished as part of storefront assembly.
- D. Section 08 5113 - Aluminum Windows: Glazing furnished by window manufacturer.

1.03 REFERENCE STANDARDS

- A. 16 CFR 1201 - Safety Standard for Architectural Glazing Materials; current edition.
- B. ANSI Z97.1 - American National Standard for Safety Glazing Materials Used in Buildings, Safety Performance Specifications and Methods of Test; 2010.
- C. ASTM C864 - Standard Specification for Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers; 2005 (Reapproved 2011).
- D. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2014.
- E. ASTM C1036 - Standard Specification for Flat Glass; 2011.
- F. ASTM C1048 - Standard Specification for Heat-Strengthened and Fully Tempered Flat Glass; 2012.
- G. ASTM C1193 - Standard Guide for Use of Joint Sealants; 2013.
- H. ASTM C1376 - Standard Specification for Pyrolytic and Vacuum Deposition Coatings on Flat Glass; 2015.
- I. ASTM E1300 - Standard Practice for Determining Load Resistance of Glass in Buildings; 2012a.
- J. ASTM E 2188 - Standard Test Method for Insulating Glass Unit Performance.
- K. ASTM E2190 - Standard Specification for Insulating Glass Unit Performance and Evaluation; 2010.
- L. GANA (GM) - GANA Glazing Manual; 2009.
- M. GANA (SM) - GANA Sealant Manual; 2008.
- N. NFRC 100 - Procedure for Determining Fenestration Product U-factors; 2014.
- O. NFRC 200 - Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence; 2014.
- P. NFRC 300 - Test Method for Determining the Solar Optical Properties of Glazing Materials and Systems; 2014.

1.04 DEFINITIONS

- A. Sealed Insulating Glass Unit Surfaces
 - 1. Surface No. 1: Exterior Surface of outer lite.
 - 2. Surface No. 2: Interior Surface of outer lite.
 - 3. Surface No. 3: Exterior Surface of inner lite.
 - 4. Surface No. 4: Interior Surface of inner lite.

1.05 ADMINISTRATIVE REQUIREMENTS

- A. Preinstallation Meeting: Convene a preinstallation meeting one week before starting work of this section; require attendance by each of the affected installers.

1.06 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Product Data on Insulating Glass Unit and Glazing Unit Glazing Types: Provide structural, physical and environmental characteristics, size limitations, special handling and installation requirements.
- C. Product Data on Glazing Compounds and Accessories: Provide chemical, functional, and environmental characteristics, limitations, special application requirements, and identify available colors.
- D. Warranty Documentation: Submit manufacturer warranty and ensure that forms have been completed in Oregon State University's name and registered with manufacturer.
- E. Maintenance Materials: Furnish the following for Oregon State University's use in maintenance of project.
 - 1. See Section 01 6000 - Product Requirements, for additional provisions.
 - 2. Extra Insulating Glass Units: One of each glass size and each glass type.

1.07 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of the type specified and with at least three years documented experience.
- C. Testing Agency Qualifications: Independent firm specializing in performing testing and inspections of the type specified in this section.

1.08 MOCK-UPS

- A. Provide mock-up of full size including glass and air barrier and vapor retarder seal.
- B. Locate where directed.
- C. Mock-ups may remain as part of the Work.

1.09 FIELD CONDITIONS

- A. Do not install glazing when ambient temperature is less than 40 degrees F.
- B. Maintain minimum ambient temperature before, during and 24 hours after installation of glazing compounds.

1.10 WARRANTY

- A. See Section 01 7800 - Closeout Submittals, for additional warranty requirements.
- B. Insulating Glass Units: Provide a five (5) year manufacturer warranty to include coverage for seal failure, interpane dusting or misting, including providing products to replace failed units.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Glass Fabricators: Manufacturers preferred option
- B. Float Glass Manufacturers:
 - 1. Basis of Design: Guardian Glass, LLC: www.guardianglass.com/#sle.
 - 2. Substitutions: Approved equivalent - Refer to Section 01 6000 - Product Requirements.

2.02 FABRICATORS

- A. Sealed Insulating Glass Unit, Heat Strengthened Glass, Tempered Glass, and Spandrel Glass: Acceptable Fabricators: Certified by Guardian Glass, LLC to fabricate SunGuard Solar Control Coated Glass products.

2.03 PERFORMANCE REQUIREMENTS - EXTERIOR GLAZING ASSEMBLIES

- A. Provide type and thickness of exterior glazing assemblies to support assembly dead loads, and to withstand live loads caused by positive and negative wind pressure acting normal to plane of glass.
 - 1. Comply with ASTM E1300 for design load resistance of glass type, thickness, dimensions, and maximum lateral deflection of supported glass.
 - 2. Provide glass edge support system sufficiently stiff to limit the lateral deflection of supported glass edges to less than 1/175 of their lengths under specified design load.
 - 3. Glass thicknesses listed are minimum.
- B. Vapor Retarder and Air Barrier Seals: Provide completed assemblies that maintain continuity of building enclosure vapor retarder and air barrier.
 - 1. In conjunction with vapor retarder and joint sealer materials described in other sections.
- C. Thermal and Optical Performance: Provide exterior glazing products with performance properties as indicated. Performance properties are in accordance with manufacturer's published data as determined with the following procedures and/or test methods:
 - 1. Center of Glass U-Value: Comply with NFRC 100 using Lawrence Berkeley National Laboratory (LBNL) WINDOW 6.3 computer program.
 - 2. Center of Glass Solar Heat Gain Coefficient (SHGC): Comply with NFRC 200 using Lawrence Berkeley National Laboratory (LBNL) WINDOW 6.3 computer program.
 - 3. Solar Optical Properties: Comply with NFRC 300 test method.

2.04 GLASS MATERIALS

2.05 INSULATING GLASS UNITS

- A. Insulating Glass Units: Types as indicated.
 - 1. Durability: Certified by an independent testing agency to comply with ASTM E2190.
 - 2. Coated Glass: Comply with requirements of ASTM C1376 for pyrolytic (hard-coat) or magnetic sputter vapor deposition (soft-coat) type coatings on flat glass; coated vision glass, Kind CV; coated overhead glass, Kind CO; or coated spandrel glass, Kind CS.
 - 3. Spacer Color: Black.
 - 4. Edge Seal:
 - a. Color: Black.
 - 5. Purge interpane space with dry air, hermetically sealed.

2.06 BASIS OF DESIGN - SOLAR CONTROL INSULATING COATED GLASS

- A. Basis of Design - Guardian Glass: Double-Glazed Sputter-Coated Insulating Glass Units
 - 1. Conformance: ASTM E 2190
 - 2. Outboard Lite: Sputter-coated Guardian Ultra Clear low-iron clear float glass
 - a. Annealed Ultra Clear Float Glass: ASTM C 1036, Type 1, Class 1, Quality q3
 - b. Vacuum Deposition Sputtered Coating: ASTM C 1376
 - c. Coating on Surface No.2: SunGuard Super Neutral 68
 - d. Glass Thickness: 6mm (1/4 inch)
 - e. Heat Treatment: Tempered; ASTM C 1048, Kind FT; CPSC 16CFR-1201; ANSI Z 97.1
 - 3. Air Space: 12mm (1/2 inch) wide, hermetically sealed, dehydrated air space
 - 4. Inboard Lite: Guardian UltraClear low-iron clear float glass
 - a. Annealed Ultra Clear Float Glass: ASTM C 1036, Type 1, Class 1, Quality q3
 - b. Glass Thickness: 6mm (1/4 inch)
 - c. Heat-Treatment: Tempered; ASTM C 1048, Kind FT; CPSC 16CFR-1201; ANSI Z 97.1
 - 5. Glass Unit Performance Characteristics:
 - a. Visible Light Transmittance: 71 percent
 - b. Visible Light Reflectance Outdoors: 11 percent
 - c. Direct Solar Energy Transmittance: 37 percent
 - d. Direct Solar Energy Reflectance Outdoors: 43 percent

- e. Winter U-Value Nighttime: 0.29
- f. Summer U-Value Daytime: 0.28
- g. Solar Heat Gain Coefficient: 0.39
- h. Summer Relative Heat Gain: 94
- 6. Edge Seals: ASTM E 2188, with aluminum spacers, dual-sealed with a primary seal of polyisobutylene and a secondary seal of silicone sealant for glass-to-spacer seals
- 7. Sealant: Approved by glass manufacturer
 - a. Spacer Color: Black.
 - b. Edge Seal:
 - c. Color: Black.
 - d. Purge interpane space with dry air, hermetically sealed.

2.07 GLAZING COMPOUNDS

- A. Type GC-1 - Glazing Putty: Polymer modified latex recommended by manufacturer for outdoor use, knife grade consistency; gray color.
- B. Type GC-2 - Butyl Sealant: Single component; ASTM C920, Grade NS, Class 12-1/2, Uses M and A, Shore A hardness of 10 to 20; black color.
- C. Type GC-4 - Polyurethane Sealant: Single component, chemical curing, non-staining, non-bleeding; ASTM C920, Type S, Grade NS, Class 25, Uses M, A, and G; with cured Shore A hardness range of 20 to 35; TBD color.

2.08 ACCESSORIES

- A. Setting Blocks: Silicone, with 80 to 90 Shore A durometer hardness; ASTM C864 Option II. Length of 0.1 inch for each square foot of glazing or minimum 4 inch by width of glazing rabbet space minus 1/16 inch by height to suit glazing method and pane weight and area.
- B. Spacer Shims: Neoprene, 50 to 60 Shore A durometer hardness; ASTM C864 Option II. Minimum 3 inch long by one half the height of the glazing stop by thickness to suit application, self adhesive on one face.
- C. Glazing Tape, Back Bedding Mastic Type: Preformed, butyl-based, 100 percent solids compound with integral resilient spacer rod applicable to application indicated; 5 to 30 cured Shore A durometer hardness; coiled on release paper; black color.
- D. Glazing Splines: Resilient silicone extruded shape to suit glazing channel retaining slot; ASTM C864 Option II; color black.
- E. Glazing Clips: Manufacturer's standard type.

2.09 SOURCE QUALITY CONTROL

- A. Provide shop inspection and testing for all glass.

PART 3 EXECUTION

3.01 VERIFICATION OF CONDITIONS

- A. Verify that openings for glazing are correctly sized and within tolerances, including those for size, squareness, and offsets at corners.
- B. Verify that surfaces of glazing channels or recesses are clean, free of obstructions that may impede moisture movement, weeps are clear, and support framing is ready to receive glazing system.
- C. Verify that sealing between joints of glass framing members has been completed effectively.
- D. Proceed with glazing system installation only after unsatisfactory conditions have been corrected.

3.02 PREPARATION

- A. Clean contact surfaces with appropriate solvent and wipe dry within maximum of 24 hours before glazing. Remove coatings that are not tightly bonded to substrates.
- B. Seal porous glazing channels or recesses with substrate compatible primer or sealer.

- C. Prime surfaces scheduled to receive sealant where required for proper sealant adhesion.

3.03 INSTALLATION, GENERAL

- A. Install glazing in compliance with written instructions of glass, gaskets, and other glazing material manufacturers, unless more stringent requirements are indicated, including those in glazing referenced standards.
- B. Install glazing sealants in accordance with ASTM C1193, GANA (SM), and manufacturer's instructions.
- C. Do not exceed edge pressures around perimeter of glass lites as stipulated by glass manufacturer.
- D. Set glass lites of system with uniform pattern, draw, bow, and similar characteristics.
- E. Set glass lites in proper orientation so that coatings face exterior or interior as indicated.
- F. Prevent glass from contact with any contaminating substances that may be the result of construction operations such as, and not limited to the following; weld splatter, fire-safing, plastering, mortar droppings, etc.

3.04 FIELD QUALITY CONTROL

- A. Glass and Glazing product manufacturers to provide field surveillance of the installation of their products.
- B. Monitor and report installation procedures and unacceptable conditions.

3.05 CLEANING

- A. Remove excess glazing materials from finish surfaces immediately after application using solvents or cleaners recommended by manufacturers.
- B. Remove non-permanent labels immediately after glazing installation is complete.
- C. Clean glass and adjacent surfaces after sealants are fully cured.
- D. Clean glass on both exposed surfaces not more than 4 days prior to Date of Substantial Completion in accordance with glass manufacturer's written recommendations.

3.06 PROTECTION

- A. After installation, mark pane with an 'X' by using removable plastic tape or paste; do not mark heat absorbing or reflective glass units.
- B. Remove and replace glass that is damaged during construction period prior to Date of Substantial Completion.

END OF SECTION

SECTION 09 9000
PAINTING AND COATING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Surface preparation.
- B. Field application of paints and other coatings.
- C. Scope: Finish all interior and exterior surfaces exposed to view, unless fully factory-finished
- D. Do Not Paint or Finish the Following Items:
 - 1. Items fully factory-finished unless specifically so indicated; materials and products having factory-applied primers are not considered factory finished.
 - 2. Items indicated to receive other finishes.
 - 3. Items indicated to remain unfinished.
 - 4. Fire rating labels, equipment serial number and capacity labels, and operating parts of equipment.
 - 5. Floors, unless specifically so indicated.
 - 6. Glass.
 - 7. Concealed pipes, ducts, and conduits.

1.02 RELATED REQUIREMENTS

- A. Section 05 5000 - Metal Fabrications: Shop-primed items.

1.03 DEFINITIONS

- A. Conform to ASTM D16 for interpretation of terms used in this section.

1.04 REFERENCE STANDARDS

- A. 40 CFR 59, Subpart D - National Volatile Organic Compound Emission Standards for Architectural Coatings; U.S. Environmental Protection Agency; current edition.
- B. ASTM D16 - Standard Terminology for Paint, Related Coatings, Materials, and Applications; 2014.
- C. ASTM D4442 - Standard Test Methods for Direct Moisture Content Measurement of Wood and Wood-Base Materials; 2007.

1.05 SUBMITTALS

- A. See Section 01 33 23 - Shop drawings, product data, samples
- B. Product Data: Provide complete list of all products to be used, with the following information for each:
 - 1. Manufacturer's name, product name and/or catalog number, and general product category (e.g. "alkyd enamel").
 - 2. MPI product number (e.g. MPI #47).
 - 3. Cross-reference to specified paint system(s) product is to be used in; include description of each system.
- C. Samples: Submit three paper "draw down" samples, 8-1/2 by 11 inches in size, illustrating range of colors available for each finishing product specified.
 - 1. Where sheen is specified, submit samples in only that sheen.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified, with minimum 10 years documented experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified with minimum 5 years experience.

1.07 MOCK-UP

- A. See Section 01 45 00 - Quality Requirements, for general requirements for mock-up.

1.08 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- B. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.
- C. Paint Materials: Store at minimum ambient temperature of 45 degrees F and a maximum of 90 degrees F, in ventilated area, and as required by manufacturer's instructions.

1.09 FIELD CONDITIONS

- A. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
- B. Follow manufacturer's recommended procedures for producing best results, including testing of substrates, moisture in substrates, and humidity and temperature limitations.
- C. Provide lighting level of 80 ft candles measured mid-height at substrate surface.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Provide all paint and coating products used in any individual system from the same manufacturer; no exceptions.
- B. Paints: Acceptable manufacturers
 - 1. Benjamin Moore & Co
 - 2. Miller
 - 3. Sherwin Williams
 - 4. Pittsburgh
 - 5. Flecto
 - 6. Rust-Oleum
- C. Primer Sealers: Same manufacturer as top coats.
- D. Block Fillers: Same manufacturer as top coats.

2.02 PAINTS AND COATINGS - GENERAL

- A. Paints and Coatings: Ready mixed, unless intended to be a field-catalyzed coating. Premium grade paint labeled as 'Best'
 - 1. Provide paints and coatings of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.
 - 2. Supply each coating material in quantity required to complete entire project's work from a single production run.
 - 3. Do not reduce, thin, or dilute coatings or add materials to coatings unless such procedure is specifically described in manufacturer's product instructions.
- B. Primers: As follows unless other primer is required or recommended by manufacturer of top coats; where the manufacturer offers options on primers for a particular substrate, use primer categorized as "best" by the manufacturer.
- C. Volatile Organic Compound (VOC) Content:
 - 1. Provide coatings that comply with the most stringent requirements specified in the following:
 - a. 40 CFR 59, Subpart D--National Volatile Organic Compound Emission Standards for Architectural Coatings.
 - 2. Determination of VOC Content: Testing and calculation in accordance with 40 CFR 59, Subpart D (EPA Method 24), exclusive of colorants added to a tint base and water added at project site; or other method acceptable to authorities having jurisdiction.
- D. Flammability: Comply with applicable code for surface burning characteristics.

- E. Sheens: Provide the sheens specified; where sheen is not specified, sheen will be selected later by Waterleaf Architecture from the manufacturer's full line.
- F. Colors: As indicated in Color Schedule
 - 1. Allow for minimum of three colors for each system, unless otherwise indicated, without additional cost to Oregon State University.
 - 2. In finished areas, finish pipes, ducts, conduit, and equipment the same color as the wall/ceiling they are mounted on/under.

2.03 PAINT SYSTEMS - EXTERIOR

- A. Paint WE-OP-2A - Wood, Opaque, Alkyd, 2 Coat:
 - 1. One coat of alkyd primer sealer.
 - 2. Semi-gloss: One coat of alkyd enamel; .
- B. Paint ME-OP-3L - Ferrous Metals, Unprimed, Latex, 3 Coat:
 - 1. One coat of latex primer.
 - 2. Semi-gloss: Two coats of latex enamel; as recommended by manufacturer.
- C. Paint MgE-OP-3A - Galvanized Metals, Alkyd, 3 Coat:
 - 1. One coat galvanize primer.
 - 2. Semi-gloss: Two coats of alkyd enamel; as recommended by manufacturer.
- D. Paint E-Pav - Pavement Marking Paint:
 - 1. Yellow: Two coats, ; as recommended by manufacturer.
 - 2. White: Two coats, ; as recommended by manufacturer.

2.04 PAINT SYSTEMS - INTERIOR

- A. Paint I-OP - All Interior Surfaces Indicated to be Painted, Unless Otherwise Indicated: Including gypsum board, concrete, concrete masonry, brick, wood, plaster, uncoated steel, shop primed steel, galvanized steel, and aluminum.
 - 1. Two top coats and one coat primer.
 - 2. Top Coat(s): Institutional Low Odor/VOC Interior Latex; MPI #143-148.
 - 3. Velvet: MPI gloss level 2; use this sheen at all locations.
 - 4. Primer(s): As follows unless other primer is required or recommended by manufacturer of top coats:
 - a. All Substrates: MPI #149, Institutional Low Odor/VOC Primer Sealer, unless a different primer is specified.
- B. Paint I-OP-MD-DT - Medium Duty Door/Trim: For surfaces subject to frequent contact by occupants, including metals and wood:
 - 1. Two top coats and one coat primer.
- C. Paint I-OP-MD-WC - Medium Duty Vertical/Overhead: Including gypsum board, plaster, concrete, concrete masonry, uncoated steel, shop primed steel, galvanized steel, and aluminum.
 - 1. Two top coats and one coat primer.
 - 2. Primer(s): As recommended by manufacturer of top coats.

2.05 ACCESSORY MATERIALS

- A. Accessory Materials: Provide all primers, sealers, cleaning agents, cleaning cloths, sanding materials, and clean-up materials required to achieve the finishes specified whether specifically indicated or not; commercial quality.
- B. Patching Material: Latex filler.
- C. Fastener Head Cover Material: Latex filler.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Do not begin application of coatings until substrates have been properly prepared.
- B. Verify that surfaces are ready to receive work as instructed by the product manufacturer.

- C. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially affect proper application.
- D. If substrate preparation is the responsibility of another installer, notify Waterleaf Architecture of unsatisfactory preparation before proceeding.
- E. Test shop-applied primer for compatibility with subsequent cover materials.
- F. Measure moisture content of surfaces using an electronic moisture meter. Do not apply finishes unless moisture content of surfaces are below the following maximums:
 - 1. Gypsum Wallboard: 12 percent.
 - 2. Plaster and Stucco: 12 percent.
 - 3. Masonry, Concrete, and Concrete Unit Masonry: 12 percent.
 - 4. Interior Wood: 15 percent, measured in accordance with ASTM D4442.
 - 5. Exterior Wood: 15 percent, measured in accordance with ASTM D4442.

3.02 PREPARATION

- A. Clean surfaces thoroughly and correct defects prior to coating application.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Remove or mask surface appurtenances, including electrical plates, hardware, light fixture trim, escutcheons, and fittings, prior to preparing surfaces or finishing.
- D. Seal surfaces that might cause bleed through or staining of topcoat.
- E. Remove mildew from impervious surfaces by scrubbing with solution of tetra-sodium phosphate and bleach. Rinse with clean water and allow surface to dry.
- F. Concrete and Unit Masonry Surfaces to be Painted: Remove dirt, loose mortar, scale, salt or alkali powder, and other foreign matter. Remove oil and grease with a solution of tri-sodium phosphate; rinse well and allow to dry. Remove stains caused by weathering of corroding metals with a solution of sodium metasilicate after thoroughly wetting with water. Allow to dry.
- G. Gypsum Board Surfaces to be Painted: Fill minor defects with filler compound. Spot prime defects after repair.
- H. Plaster Surfaces to be Painted: Fill hairline cracks, small holes, and imperfections with latex patching plaster. Make smooth and flush with adjacent surfaces. Wash and neutralize high alkali surfaces.
- I. Aluminum Surfaces to be Painted: Remove surface contamination by steam or high pressure water. Remove oxidation with acid etch and solvent washing. Apply etching primer immediately following cleaning.
- J. Galvanized Surfaces to be Painted: Remove surface contamination and oils and wash with solvent. Apply coat of etching primer.
- K. Corroded Steel and Iron Surfaces to be Painted: Prepare using at least SSPC-SP 2 (hand tool cleaning) or SSPC-SP 3 (power tool cleaning) followed by SSPC-SP 1 (solvent cleaning).
- L. Uncorroded Uncoated Steel and Iron Surfaces to be Painted: Remove grease, mill scale, weld splatter, dirt, and rust. Where heavy coatings of scale are evident, remove by hand wire brushing or sandblasting; clean by washing with solvent. Apply a treatment of phosphoric acid solution, ensuring weld joints, bolts, and nuts are similarly cleaned. Prime paint entire surface; spot prime after repairs.
- M. Shop-Primed Steel Surfaces to be Finish Painted: Sand and scrape to remove loose primer and rust. Feather edges to make touch-up patches inconspicuous. Clean surfaces with solvent. Prime bare steel surfaces. Re-prime entire shop-primed item.
- N. Interior Wood Surfaces to Receive Opaque Finish: Wipe off dust and grit prior to priming. Seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after primer has dried; sand between coats. Back prime concealed surfaces before installation.

- O. Exterior Wood Surfaces to Receive Opaque Finish: Remove dust, grit, and foreign matter. Seal knots, pitch streaks, and sappy sections. Fill nail holes with tinted exterior caulking compound after prime coat has been applied. Back prime concealed surfaces before installation.

3.03 APPLICATION

- A. Exterior Wood to Receive Opaque Finish: If final painting must be delayed more than 2 weeks after installation of woodwork, apply primer within 2 weeks and final coating within 4 weeks.
- B. Apply products in accordance with manufacturer's instructions.
- C. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.
- D. Apply each coat to uniform appearance.
- E. Sand wood and metal surfaces lightly between coats to achieve required finish.
- F. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.
- G. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 45 00 - Quality Requirements, for general requirements for field inspection.
- B. Oregon State University will provide field inspection.

3.05 CLEANING

- A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.

3.06 PROTECTION

- A. Protect finished coatings until completion of project.
- B. Touch-up damaged coatings after Substantial Completion.

3.07 SCHEDULE - COLORS (SEE FINISH SCHEDULE)

END OF SECTION